

2017

Evaluation of floodwater loading on domestic housing

Kail, S.


Kail, S. (2017) 'Evaluation of floodwater loading on domestic housing', The Plymouth Student Scientist, 10(2), p. 80-133.

<http://hdl.handle.net/10026.1/14162>

The Plymouth Student Scientist
University of Plymouth

All content in PEARL is protected by copyright law. Author manuscripts are made available in accordance with publisher policies. Please cite only the published version using the details provided on the item record or document. In the absence of an open licence (e.g. Creative Commons), permissions for further reuse of content should be sought from the publisher or author.

Appendix A - Elevation and section of the original wall panel studied

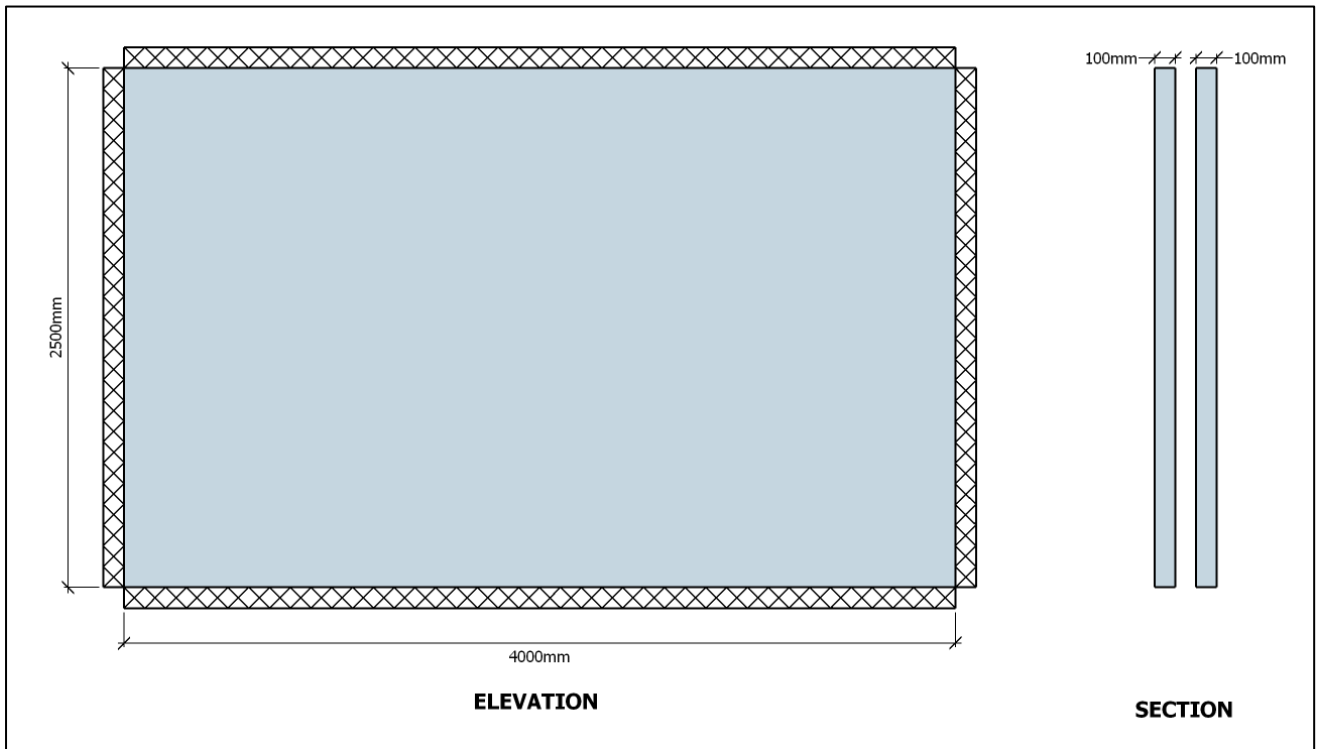


Appendix B - Moment of resistance parallel to the bed joints calculations for different wall constructions

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY	Job N°	Section	Sheet N°	Rev
	School of Marine Science & Engineering	SK	1	Checked
	Date	22/11/15	Rev. Date	

Project: Dissertation - PRCE 507 Project 2


Element: Moment of resistance parallel to bed joints for different wall constructions

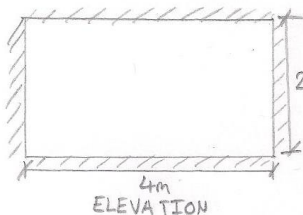

ELEVATION

$$M_{Ra,1} = \left(\frac{f_{axe}}{\gamma_m} + \sigma_d \right) \cdot Z$$


Taking f_{axe} as 0.3 (M4 mortar with clay unit moisture absorption > 12%), ignoring σ_d and taking γ_m as 3.



SECTION

$$M_{Ra,1} = \left(\frac{0.3}{3} \right) \times \left[\frac{10^3 \times 100^2}{6} \right] \times 10^{-6}$$


$$= 0.167 \text{ kNm/m}$$



SECTION

$$M_{Ra,1} = \left(\frac{0.3}{3} \right) \times \left[\frac{10^3 \times 100^2}{6} \times 2 \right] \times 10^{-6}$$


$$= 0.333 \text{ kNm/m}$$



SECTION

$$M_{Ra,1} = \left(\frac{0.3}{3} \right) \times \left[\frac{10^3 \times 215^2}{6} \right] \times 10^{-6}$$


$$= 0.770 \text{ kNm/m}$$

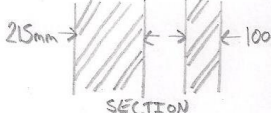

SECTION

$$M_{Ra,1} = \left(\frac{0.3}{3} \right) \times \left[\frac{10^3 \times 215^2}{6} + \frac{10^3 \times 100^2}{6} \right] \times 10^{-6}$$

$$= 0.937 \text{ kNm/m}$$

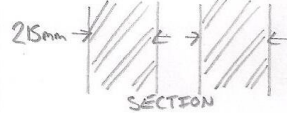

SECTION

$$M_{Ra,1} = \left(\frac{0.3}{3} \right) \times \left[\frac{10^3 \times 215^2}{6} \times 2 \right] \times 10^{-6}$$

$$= 1.541 \text{ kNm/m}$$

Appendix C - Tabulated yield line calculation results for the panel observed in Section 2.1.1

Height/width of lower diagonal yield lines (m)	Mp (kNm/m)
0.1	0.035
0.2	0.045
0.3	0.06
0.4	0.084
0.5	0.114
0.6	0.139
0.7	0.154
0.8	0.166
0.9	0.177
1	0.187
1.2	0.202
1.5	0.219
2	0.216

Appendix D1 - 0.1m high/wide lower diagonal yield line calculation

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering	Job N ^o	Section	Sheet N ^o	Rev
	Engineer	SK	Checked	
	Date	23/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.1m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.1}{2.4}\right) = 2.386$

$2.386 \div 45 = 0.053 \theta \therefore \alpha = 0.053 \theta$

$2 - 0.053 = 1.947 \therefore \beta = 1.947 \theta$

$\tan(2.386) = \frac{2c}{1.9}$

$2c = 0.079m$

$0.1 - 0.079 = 0.021m$

EWD:

Load = $p \cdot g \cdot h_g \cdot A$

$= 1000 \times 9.81 \times (0.5 + \frac{2}{3} \times 0.1) \times (\frac{0.1 \times 0.1}{2})$

$= 27.795N = \underline{0.028kN}$

Load = $1000 \times 9.81 \times (0.5 + \frac{1}{3} \times 0.1) \times (\frac{0.1 \times 0.1}{2})$

$= 26.160N = \underline{0.026kN}$

Load = $1000 \times 9.81 \times (0.5 + 0.05) \times (0.1 \times 3.8)$

$= 2050.290N = \underline{2.050kN}$

Load = $1000 \times 9.81 \times (0.25) \times (0.5 \times 3.8)$

$= 4659.750N = \underline{4.660kN}$

Load = $1000 \times 9.81 \times 0.25 \times (0.5 \times 0.01)$

$= 25.751N = \underline{0.026kN}$

Load = $1000 \times 9.81 \times 0.25 \times (0.5 \times 0.079)$

$= 96.874N = \underline{0.097kN}$

Upper triangle: $0.026 \times \frac{1}{3} = 8.667 \times 10^{-3} kN$

Lower triangle: $0.026 \times \frac{2}{3} = 0.017kN$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	23/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.1m high/wide lower diagonal yield line - yield line analysis

$$EWD = [0.028 \times (\frac{0.1 \times 0.1}{2}) \times \frac{d}{3}] \times 2 + [0.026 \times (\frac{0.1 \times 0.1}{2}) \times \frac{d}{3}] \times 2 + [0.097 \times (0.5 \times 0.079) \times \frac{d}{2}] \times 2 \\ + [4.660 \times (0.5 \times 3.8) \times \frac{d}{2}] + [2.050 \times (0.1 \times 3.8) \times \frac{d}{2}] + [8.667 \times 10^{-3} \times (\frac{0.5 \times 0.021}{2}) \times \frac{d}{3}] \times 2 \\ + [0.017 \times (\frac{0.5 \times 0.021}{2}) \times \frac{d}{3}] \times 2$$

$$EWD = 9.333 \times 10^{-5} d + 8.667 \times 10^{-5} d + 3.832 \times 10^{-3} d + 4.427 d + 0.390 d + 3.033 \times 10^{-5} d + 5.950 \times 10^{-5} d$$

$$EWD = 4.821 d$$

$$IWD = [(M_p \times 0.1 \times 0) \times 2 \times 2] + \{ [M_p \times 2.4 \times 0.053 \times 0] \times 2 \} + [M_p \times 0.1 \times 1.947 \times 0] \times 2 \} + [M_p \times 3.8 \times 0] + [M_p \times 3.8 \times 0] \\ + [M_p \times 4 \times 0] + [M_p \times 4 \times 0] + [M_p \times 2.5 \times 0] \times 2$$

$$IWD = [M_p \times 0.1 \times \frac{d}{0.1}] \times 2 \times 2 \} + \{ [M_p \times 2.4 \times 0.053 \times \frac{d}{0.1}] \times 2 \} + [M_p \times 0.1 \times 1.947 \times \frac{d}{2.4}] \times 2 \} \\ + \{ [M_p \times 3.8 \times \frac{d}{0.1}] + [M_p \times 3.8 \times \frac{d}{2.4}] \} + [M_p \times 4 \times \frac{d}{2.4}] + [M_p \times 4 \times \frac{d}{0.1}] + [M_p \times 2.5 \times \frac{d}{0.1}] \times 2$$

$$IWD = 4 M_p d + (2.544 M_p d + 0.162 M_p d) + (38 M_p d + 1.583 M_p d + 1.667 M_p d) + 40 M_p d + 50 M_p d$$

$$IWD = 137.956 M_p d$$

$$EWD = IWD$$

$$4.821 d = 137.956 M_p d$$

$$M_p = 0.035 R_{yk} / m$$

Appendix D2 - 0.2m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY</p> <p style="text-align: right;">School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	23/1/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 0.2m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.2}{2.3}\right) = 4.970$

$4.970 \div 45 = 0.110 \therefore \alpha = 0.110 \theta$

$2 - 0.110 = 1.890 \therefore \beta = 1.890 \theta$

$\tan(4.970) = \frac{x}{0.2}$

$x = 0.165m$

$0.2 - 0.165 = 0.035m$

EWD:

Load = $\rho \cdot g \cdot h_g \cdot A$

$= 1000 \times 9.81 \times (0.4 + \frac{2}{3} \times 0.2) \times (\frac{0.2 \times 0.2}{2})$

$= 104.640N = \underline{0.105kN}$

Load = $1000 \times 9.81 \times (0.4 + \frac{1}{3} \times 0.2) \times (\frac{0.2 \times 0.2}{2})$

$= 91.560N = \underline{0.092kN}$

Load = $1000 \times 9.81 \times (0.4 + 0.1) \times (0.2 \times 3.6)$

$= 3531.600N = \underline{3.532kN}$

Load = $1000 \times 9.81 \times (0.2) \times (3.6 \times 0.4)$

$= 2825.280N = \underline{2.825kN}$

Load = $1000 \times 9.81 \times 0.2 \times (0.4 \times 0.035)$

$= 27.468N = \underline{0.027kN}$

} Upper triangle: $0.027 \times \frac{1}{3} = 9 \times 10^3 \mu N$

} Lower triangle: $0.027 \times \frac{2}{3} = 0.018kN$

Load = $1000 \times 9.81 \times 0.2 \times (0.4 \times 0.165)$

$= 129.492N = \underline{0.129kN}$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	23/11/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 0.2 high/wide lower diagonal shield line - shield line analysis

$$EWD = [0.105 \times (\frac{0.2 \times 0.2}{2}) \times \frac{d}{3}] \times 2 + [0.092 \times (\frac{0.2 \times 0.2}{2}) \times \frac{d}{3}] \times 2 + [3.532 \times (0.2 \times 3.6) \times \frac{d}{2}]$$

$$+ [2.825 \times (0.4 \times 3.6) \times \frac{d}{2}] + [9 \times 10^{-3} \times (\frac{0.4 \times 0.035}{2}) \times \frac{d}{3}] \times 2 + [0.018 \times (\frac{0.4 \times 0.035}{2}) \times \frac{d}{3}] \times 2$$

$$+ [0.129 \times (0.4 \times 0.165) \times \frac{d}{2}] \times 2$$

$$EWD = 1.4 \times 10^{-3} d + 1.227 \times 10^{-3} d + 1.272 d + 2.034 d + 4.2 \times 10^{-3} d + 8.4 \times 10^{-3} d + 8.514 \times 10^{-3} d$$

$$EWD = 3.317 d$$

$$IWD = [(M_p \times 0.2 \times 0) \times 2 \times 2] + \{ [(M_p \times 2.3 \times 0.110) \times 2] + [(M_p \times 0.2 \times 1.890) \times 2] \} + [(M_p \times 3.6 \times 0) + (M_p \times 3.6 \times 0)]$$

$$+ [(M_p \times 4 \times 0) + (M_p \times 4 \times 0) + [(M_p \times 2.5 \times 0) \times 2]$$

$$IWD = [(M_p \times 0.2 \times \frac{d}{2}) \times 2 \times 2] + \{ [(M_p \times 2.3 \times 0.11 \times \frac{d}{2}) \times 2] + [(M_p \times 0.2 \times 1.89 \times \frac{d}{2.3}) \times 2] \} + [(M_p \times 3.6 \times \frac{d}{2}) + (M_p \times 3.6 \times \frac{d}{2.3})]$$

$$+ [(M_p \times 4 \times \frac{d}{2.3}) + (M_p \times 4 \times \frac{d}{0.2}) + [(M_p \times 2.5 \times \frac{d}{0.2}) \times 2]$$

$$IWD = 4M_p d + (2.53M_p d + 0.329M_p d) + (18M_p d + 1.565M_p d) + 1.739M_p d + 20M_p d + 25M_p d$$

$$IWD = 73.163M_p d$$

$$EWD = IWD$$

$$3.317 d = 73.163M_p d$$

$$M_p = 0.045 \text{ kNm/m}$$

Appendix D3 - 0.3m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY</p> <p style="text-align: right;">School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	23/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.3m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.3}{2.2}\right) = 7.765$

$7.765 \div 45 = 0.1730 \therefore \alpha = 0.1730$

$2 - 0.173 = 1.827 \therefore \beta = 1.8270$

$\tan(7.765) = \frac{x}{0.3}$

$x = 0.259m$

$0.3 - 0.259 = 0.041m$

EWD:

Load = $p \cdot g \cdot h_g \cdot A$

$= 1000 \times 9.81 \times (0.3 + \frac{2}{3} \times 0.3) \times (\frac{0.3 \times 0.3}{2})$

$= 220.725N = \underline{0.221kN}$

Load = $1000 \times 9.81 \times (0.3 + \frac{1}{3} \times 0.3) \times (\frac{0.3 \times 0.3}{2})$

$= 176.580N = \underline{0.177kN}$

Load = $1000 \times 9.81 \times (0.3 + 0.15) \times (0.3 \times 3.4)$

$= 4502.790N = \underline{4.503kN}$

Load = $1000 \times 9.81 \times 0.15 \times (0.3 \times 3.4)$

$= 1500.930N = \underline{1.501kN}$

Load = $1000 \times 9.81 \times 0.15 \times (0.3 \times 0.041)$

$= 18.0995N = \underline{0.018kN}$

Upper triangle: $0.018 \times \frac{1}{3} = 6 \times 10^{-3}kN$

Lower triangle: $0.018 \times \frac{2}{3} = 0.012kN$

Load = $1000 \times 9.81 \times 0.15 \times (0.3 \times 0.259)$

$= 114.336N = \underline{0.114kN}$

Job N°	Section	Sheet N°	Rev
Engineer	SK	2	Checked
Date	23/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.3m high/wide lower diagonal yield line - yield line analysis

$$EWD = \left[0.221 \times \left(\frac{0.3 \times 0.3}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[0.177 \times \left(\frac{0.3 \times 0.3}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[4.503 \times (0.3 \times 3.4) \times \frac{d}{2} \right] \\ + \left[1.501 \times (0.3 \times 3.4) \times \frac{d}{2} \right] + \left[6 \times 10^{-3} \times \left(\frac{0.041 \times 0.3}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[0.012 \times \left(\frac{0.041 \times 0.3}{2} \right) \times \frac{d}{3} \right] \times 2 \\ + \left[0.114 \times (0.3 \times 0.259) \times \frac{d}{2} \right] \times 2$$

$$EWD = 6.630 \times 10^{-3} d + 5.31 \times 10^{-3} d + 2.297 d + 0.766 d + 2.460 \times 10^{-5} d + 4.920 \times 10^{-5} d + 8.858 \times 10^{-3} d$$

$$EWD = 3.084 d$$

$$IWD = \left[(M_p \times 0.3 \times 0) \times 2 \times 2 \right] + \left\{ \left[(M_p \times 2.2 \times 0.17) \times 2 \right] + \left[(M_p \times 0.3 \times 1.83) \times 2 \right] \right\} + \left[(M_p \times 3.4 \times 0) + (M_p \times 3.4 \times 0) \right] \\ + \left[(M_p \times 4 \times 0) + (M_p \times 4 \times 0) \right] + \left[(M_p \times 2.5 \times 0) \times 2 \right]$$

$$IWD = \left[(M_p \times 0.3 \times \frac{d}{0.3}) \times 2 \times 2 \right] + \left\{ \left[(M_p \times 2.2 \times 0.17 \times \frac{d}{0.3}) \times 2 \right] + \left[(M_p \times 0.3 \times 1.83 \times \frac{d}{2.2}) \times 2 \right] \right\} + \left[(M_p \times 3.4 \times \frac{d}{0.3}) + (M_p \times 3.4 \times \frac{d}{2.2}) \right] \\ + \left[(M_p \times 4 \times \frac{d}{2.2}) + (M_p \times 4 \times \frac{d}{0.3}) \right] + \left[(M_p \times 2.5 \times \frac{d}{0.3}) \times 2 \right]$$

$$IWD = 4 M_p d + (2.493 M_p d + 0.499 M_p d) + (1.333 M_p d + 1.545 M_p d) + 1.818 M_p d + 13.333 M_p d + 16.667 M_p d$$

$$IWD = 51.688 M_p d$$

$$EWD = IWD$$

$$3.084 d = 51.688 M_p d$$

$$M_p = 0.060 \text{ kNm/m}$$

Appendix D4 - 0.4m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.4m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.4}{2.1}\right) = 10.784$

$10.784 \div 45 = 0.240 \quad \therefore \alpha = 0.2400$

$2 - 0.240 = 1.760 \quad \therefore \beta = 1.7600$

$\tan(10.784) = \frac{2c}{x}$

$x = 0.362m$

$0.4 - 0.362 = 0.038m$

EWD:

Load = $\rho \cdot g \cdot h_g \cdot A$

$= 1000 \times 9.81 \times (0.2 + \frac{2}{3} \times 0.4) \times \left(\frac{0.4 \times 0.4}{2}\right)$

$= 366.240N = \underline{0.366kN}$

Load = $1000 \times 9.81 \times (0.2 + \frac{1}{3} \times 0.4) \times \left(\frac{0.4 \times 0.4}{2}\right)$

$= 261.600N = \underline{0.262kN}$

Load = $1000 \times 9.81 \times 0.4 \times (0.4 \times 3.2)$

$= 5022.720N = \underline{5.023kN}$

Load = $1000 \times 9.81 \times 0.1 \times (0.2 \times 3.2)$

$= 627.840N = \underline{0.628kN}$

Load = $1000 \times 9.81 \times 0.1 \times (0.2 \times 0.038)$

$= 7.456N = \underline{0.007kN}$

Upper triangle: $0.007 \times \frac{1}{3} = 0.002kN$

Lower triangle: $0.007 \times \frac{2}{3} = 0.005kN$

Load = $1000 \times 9.81 \times 0.1 \times (0.2 \times 0.362)$

$= 71.024N = \underline{0.071kN}$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.4m high/wide lower diagonal yield line - yield line analysis

$$EWD = [0.366 \times (\frac{0.4 \times 0.4}{2}) \times \frac{d}{3}] \times 2 + [0.262 \times (\frac{0.4 \times 0.4}{2}) \times \frac{d}{3}] \times 2 + [5.023 \times (0.4 \times 3.2) \times \frac{d}{2}] \\ + [0.628 \times (0.2 \times 3.2) \times \frac{d}{2}] + [0.002 \times (\frac{0.2 \times 0.038}{2}) \times \frac{d}{3}] \times 2 + [0.005 \times (\frac{0.2 \times 0.038}{2}) \times \frac{d}{3}] \times 2 + [0.071 \times (0.2 \times 0.352) \times \frac{d}{2}] \times 2$$

$$EWD = 0.020d + 0.014d + 3.215d + 0.201d + 5.067 \times 10^{-6}d + 1.267 \times 10^{-5}d + 5.140 \times 10^{-3}d$$

$$EWD = 3.455d$$

$$IWD = [(M_p \times 0.4 \times 0) \times 2] + \{ [(M_p \times 2.1 \times 0.24) \times 2] + [(M_p \times 0.4 \times 1.76) \times 2] \} + [(M_p \times 3.2 \times 0) + (M_p \times 3.2 \times 0)] \\ + (M_p \times 4 \times 0) + (M_p \times 4 \times 0) + [(M_p \times 2.5 \times 0) \times 2]$$

$$IWD = [(M_p \times 0.4 \times \frac{d}{0.4}) \times 2] + \{ [(M_p \times 2.1 \times 0.24 \times \frac{d}{0.4}) \times 2] + [(M_p \times 0.4 \times 1.76 \times \frac{d}{2.1}) \times 2] \} + [(M_p \times 3.2 \times \frac{d}{0.4}) + (M_p \times 3.2 \times \frac{d}{2.1})] \\ + (M_p \times 4 \times \frac{d}{2.1}) + (M_p \times 4 \times \frac{d}{0.4}) + [(M_p \times 2.5 \times \frac{d}{0.4}) \times 2]$$

$$IWD = 4M_{pd} + (2.520M_{pd} + 0.670M_{pd}) + (8M_{pd} + 1.524M_{pd}) + 1.905M_{pd} + 10M_{pd} + 12.5M_{pd}$$

$$IWD = 41.119M_{pd}$$

$$EWD = IWD$$

$$3.455d = 41.119M_{pd}$$

$$M_p = 0.084 \text{ kNm/m}$$

Appendix D5 - 0.5m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	24/11/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 0.5m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.5}{2.0}\right) = 14.036$

$14.036 \div 45 = 0.312 \quad \therefore \alpha = 0.312 \times 45$

$2 - 0.312 = 1.688 \quad \therefore \beta = 1.688 \times 45$

$\tan(14.036) = \frac{x}{1.9}$

$x = 0.475m$

$0.5 - 0.475 = 0.025m$

EWD:

Load = $\rho \cdot g \cdot h \cdot A$

$= 1000 \times 9.81 \times (0.1 + \frac{2}{3} \times 0.5) \times (\frac{0.5 \times 0.5}{2})$

$= 531.375N = \underline{0.531kN}$

Load = $1000 \times 9.81 \times (0.1 + \frac{1}{3} \times 0.5) \times (\frac{0.5 \times 0.5}{2})$

$= 327.000N = \underline{0.327kN}$

Load = $1000 \times 9.81 \times (0.1 + \frac{0.5}{2}) \times (0.5 \times 3.0)$

$= 5150.250N = \underline{5.150kN}$

Load = $1000 \times 9.81 \times (\frac{0.1}{2}) \times (0.1 \times 3)$

$= 147.150N = \underline{0.147kN}$

Load = $1000 \times 9.81 \times (\frac{0.1}{2}) \times (0.1 \times 0.025)$

$= 1.226N = \underline{0.001kN}$

Upper triangle: $0.001 \times \frac{1}{3} = 0.0003kN$

Lower triangle: $0.001 \times \frac{2}{3} = 0.0007kN$

Load = $1000 \times 9.81 \times (\frac{0.1}{2}) \times (0.1 \times 0.475)$

$= 23.299N = \underline{0.023kN}$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.5m high/wide lower diagonal yield line - yield line analysis

$$EWD = [0.531 \times (\frac{0.5 \times 0.5}{2}) \times \frac{d}{3}] \times 2 + [0.327 \times (\frac{0.5 \times 0.5}{2}) \times \frac{d}{3}] \times 2 + [5.150 \times (3 \times 0.5) \times \frac{d}{2}] \\ + [0.147 \times (0.1 \times 3) \times \frac{d}{2}] + [0.0003 \times (\frac{0.1 \times 0.025}{2}) \times \frac{d}{3}] \times 2 + [0.007 \times (\frac{0.1 \times 0.025}{2}) \times \frac{d}{3}] \times 2 \\ + [0.023 \times (0.475 \times 0.1) \times \frac{d}{2}] \times 2$$

$$EWD = 0.044d + 0.027d + 3.863d + 0.022d + 2.5 \times 10^{-3}d + 5.833 \times 10^{-3}d + 1.093 \times 10^{-3}d$$

$$EWD = 3.957d$$

$$IWD = [(M_p \times 0.5 \times d) \times 2] + [(M_p \times 2 \times 0.31d) \times 2] + [(M_p \times 0.5 \times 1.69d) \times 2] + [(M_p \times 3.0 \times d) + (M_p \times 3.0 \times d)] \\ + (M_p \times 4 \times d) + (M_p \times 4 \times d) + [(M_p \times 2.5 \times d) \times 2]$$

$$IWD = [(M_p \times 0.5 \times \frac{d}{0.5}) \times 2] + [(M_p \times 2 \times 0.31 \times \frac{d}{0.5}) \times 2] + [(M_p \times 0.5 \times 1.69 \times \frac{d}{2.0}) \times 2] \\ + [(M_p \times 3.0 \times \frac{d}{2.0}) + (M_p \times 3.0 \times \frac{d}{0.5})] + (M_p \times 4 \times \frac{d}{2.0}) + (M_p \times 4 \times \frac{d}{0.5}) + [(M_p \times 2.5 \times \frac{d}{0.5}) \times 2]$$

$$IWD = 4M_p d + (2.480M_p + 0.845M_p) + (15M_p d + 6M_p d) + 2M_p d + 8M_p d + 10M_p d$$

$$IWD = 34.825M_p d$$

$$EWD = IWD$$

$$3.957d = 34.825M_p d$$

$$M_p = 0.114 \text{ kNm/m}$$

Appendix D6 - 0.6m high/wide lower diagonal yield line calculation

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY	School of Marine Science & Engineering	Job N°	Section	Sheet N°	Rev
		Engineer	SK	1	Checked
		Date	24/11/15	Rev. Date	

Project: Dissertation - PRICES07 Project

Element: 0.6m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$
 $\alpha = \tan^{-1}\left(\frac{0.6}{1.4}\right) = 17.526$
 $17.526 \div 45 = 0.389 \quad \therefore \alpha = 0.389 \text{ rad}$
 $2 \times 0.389 = 1.611 \quad \therefore \beta = 1.611 \text{ rad}$

EWD:

$$\text{Load} = \rho \cdot g \cdot h_c \cdot A$$

$$= 1000 \times 9.81 \times \left(\frac{2}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$$

$$= 706.320 \text{ N} = \underline{0.706 \text{ kN}}$$

$$\text{Load} = 1000 \times 9.81 \times \left(\frac{1}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$$

$$= 353.160 \text{ N} = \underline{0.353 \text{ kN}}$$

$$\text{Load} = 1000 \times 9.81 \times \frac{0.6}{2} \times (0.6 \times 2.8)$$

$$= 4944.240 \text{ N} = \underline{4.944 \text{ kN}}$$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	24/11/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 0.6m high/wide lower diagonal yield line - yield line analysis

$$EWD = [0.706 \times (\frac{0.6 \times 0.6}{2}) \times \frac{d}{3}] \times 2 + [0.353 \times (\frac{0.6 \times 0.6}{2}) \times \frac{d}{3}] \times 2 + [4.944 \times (2.8 \times 0.6) \times \frac{d}{2}]$$

$$EWD = 0.085d + 0.042d + 4.153d$$

$$EWD = 4.280d$$

$$IWD = [(M_p \times 0.6 \times d) \times 2 \times 2] + \{ [(M_p \times 1.9 \times 0.39d) \times 2 + (M_p \times 0.6 \times 1.61d) \times 2] \} + [(M_p \times 2.8 \times d) + (M_p \times 2.8 \times d)] \\ + (M_p \times 4 \times d) + (M_p \times 4 \times d) + [(M_p \times 2.5 \times d) \times 2]$$

$$IWD = [(M_p \times 0.6 \times \frac{d}{0.6}) \times 2 \times 2] + \{ [(M_p \times 1.9 \times 0.39 \times \frac{d}{0.6}) \times 2 + (M_p \times 0.6 \times 1.61 \times \frac{d}{1.9}) \times 2] \} \\ + [(M_p \times 2.8 \times \frac{d}{0.6}) + (M_p \times 2.8 \times \frac{d}{1.9})] + (M_p \times 4 \times \frac{d}{1.9}) + (M_p \times 4 \times \frac{d}{0.6}) + [(M_p \times 2.5 \times \frac{d}{0.6}) \times 2]$$

$$IWD = 4M_p d + (2.470M_p d + 1.017M_p d) + (4.667M_p d + 1.474M_p d) + 2.105M_p d + 6.667M_p d + 8.333M_p d$$

$$IWD = 30.733M_p d$$

$$EWD = IWD$$

$$4.280d = 30.733M_p d$$

$$M_p = 0.139 \text{ kNm/m}$$

Appendix D7 - 0.7m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.7m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$
 $\alpha = \tan^{-1}\left(\frac{0.7}{1.8}\right) = 21.251^\circ$
 $21.251 \div 45 = 0.47 \quad \therefore \alpha = 0.47\theta$
 $2 - 0.47 = 1.53 \quad \therefore \beta = 1.53\theta$

EWD:

$Load = \rho \cdot g \cdot h_f \cdot A$
 $= 1000 \times 9.81 \times \left(\frac{2}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$
 $= 706.320 N = \underline{0.706 kN}$

$Load = 1000 \times 9.81 \times \left(\frac{1}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$
 $= 353.160 N = \underline{0.353 kN}$

$Load = 1000 \times 9.81 \times \frac{0.6}{2} \times (0.6 \times 2.8)$
 $= 4944.240 N = \underline{4.944 kN}$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.7m high/wide lower diagonal yield line - yield line analysis

$$EWD = \left[0.706 \times \left(\frac{0.6 \times 0.6}{2} \right) \times \frac{d^2}{3} \right] \times 2 + \left[0.353 \times \left(\frac{0.6 \times 0.6}{2} \right) \times \frac{d^2}{3} \right] \times 2 + \left[4.944 \times (2.8 \times 0.6) \times \frac{d^2}{2} \right]$$

$$EWD = 0.085d^3 + 0.042d^3 + 4.153d^3$$

$$EWD = \underline{4.280d^3}$$

$$IWD = \left[(M_p \times 0.7 \times 0) \times 2 \times 2 \right] + \left\{ \left[(M_p \times 1.8 \times 0.470) \times 2 \right] + \left[(M_p \times 0.7 \times 1.530) \times 2 \right] \right\} + \left[(M_p \times 2.6 \times 0) + (M_p \times 2.6 \times 0) \right] \\ + \left[(M_p \times 4 \times 0) + (M_p \times 4 \times 0) + (M_p \times 2.5 \times 0) \times 2 \right]$$

$$IWD = \left[(M_p \times 0.7 \times \frac{d}{0.7}) \times 2 \times 2 \right] + \left\{ \left[(M_p \times 1.8 \times 0.47 \times \frac{d}{0.7}) \times 2 \right] + \left[(M_p \times 0.7 \times 1.53 \times \frac{d}{1.8}) \times 2 \right] \right\} + \left[(M_p \times 2.6 \times \frac{d}{0.7}) + (M_p \times 2.6 \times \frac{d}{1.8}) \right] \\ + \left[(M_p \times 4 \times \frac{d}{1.8}) + (M_p \times 4 \times \frac{d}{0.7}) + (M_p \times 2.5 \times \frac{d}{0.7}) \times 2 \right]$$

$$IWD = \underline{4M_p d^2} + (2.417M_p d^2 + 1.190M_p d^2) + (3.714M_p d^2 + 1.444M_p d^2) + 2.222M_p d^2 + 5.714M_p d^2 + 7.143M_p d^2$$

$$IWD = 27.844M_p d^2$$

$$EWD = IWD$$

$$4.280d^3 = 27.844M_p d^2$$

$$M_p = \underline{0.154 \text{ kNm/m}}$$

Appendix D8 - 0.8m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	1	Checked
	Date	24/11/15	Rev. Date	

Project: Dissertation - PRCF507 Project 2

Element: 0.8m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.8}{1.7}\right) = 25.201^\circ$

$25.201 \div 45 = 0.560 \quad \therefore \alpha = 0.560\theta$

$2 - 0.560 = 1.440 \quad \therefore \beta = 1.440\theta$

$EWD = 4 \cdot 280d$ (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')

$IWD = [(M_p \times 0.8 \times \theta) \times 2 \times 2] + \{ [(M_p \times 1.7 \times 0.560) \times 2] + [(M_p \times 0.8 \times 1.440) \times 2] \} + [(M_p \times 2.4 \times \theta) + (M_p \times 2.4 \times \theta)]$
 $+ (M_p \times 4 \times \theta) + (M_p \times 4 \times \theta) + (M_p \times 2.5 \times \theta) \times 2$

$IWD = [(M_p \times 0.8 \times \frac{d}{0.8}) \times 2 \times 2] + \{ [(M_p \times 1.7 \times 0.560 \times \frac{d}{0.8}) \times 2] + [(M_p \times 0.8 \times 1.440 \times \frac{d}{1.7}) \times 2] \} + [(M_p \times 2.4 \times \frac{d}{0.8}) + (M_p \times 2.4 \times \frac{d}{1.7})]$
 $+ (M_p \times 4 \times \frac{d}{1.7}) + (M_p \times 4 \times \frac{d}{0.8}) + [(M_p \times 2.5 \times \frac{d}{0.8}) \times 2]$

$IWD = 4M_p d + (2.380M_p d + 1.355M_p d) + (3M_p d + 1.412M_p d) + 2.353M_p d + 5M_p d + 6.250M_p d$

$IWD = 25.750M_p d$

$EWD = IWD$

$4 \cdot 280d = 25.750M_p d$

$M_p = 0.166 \text{ kNm/m}$

Appendix D9 - 0.9m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 0.9m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.9}{1.6}\right) = 29.358^\circ$

$29.358 \div 45 = 0.652 \quad \therefore \alpha = 0.652 \theta$

$2 - 0.652 = 1.348 \quad \therefore \beta = 1.348 \theta$

$$EWD = 4 \cdot 280d \text{ (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')}$$

$$IWD = [(M_p \times 0.9 \times \theta) \times 2 \times 2] + \{ [(M_p \times 1.6 \times 0.652 \theta) \times 2] + [(M_p \times 0.9 \times 1.35 \theta) \times 2] \} + [(M_p \times 2.2 \times \theta) + (M_p \times 2.2 \times \theta)]$$

$$+ (M_p \times 4 \times \theta) + (M_p \times 4 \times \theta) + [(M_p \times 2.5 \times \theta) \times 2]$$

$$IWD = [(M_p \times 0.9 \times \frac{\theta}{0.9}) \times 2 \times 2] + [(M_p \times 1.6 \times 0.65 \times \frac{\theta}{0.9}) \times 2] + [(M_p \times 0.9 \times 1.35 \times \frac{\theta}{0.9}) \times 2] + [(M_p \times 2.2 \times \frac{\theta}{0.9}) + (M_p \times 2.2 \times \frac{\theta}{0.9})]$$

$$+ (M_p \times 4 \times \frac{\theta}{0.9}) + (M_p \times 4 \times \frac{\theta}{0.9}) + [(M_p \times 2.5 \times \frac{\theta}{0.9}) \times 2]$$

$$IWD = 4M_p d + (2.311M_p d + 1.519M_p d) + 2.444M_p d + 1.375M_p d + 2.500M_p d + 4.444M_p d + 5.556M_p d$$

$$IWD = 24.149M_p d$$

$$EWD = IWD$$

$$4 \cdot 280d = 24.149M_p d$$

$$M_p = 0.177 \text{ kNm/m}$$

Appendix D10 - 1.0m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	24/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 1.0m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{1.0}{1.5}\right) = 33.69^\circ$

$33.69^\circ \div 45^\circ = 0.749 \quad \therefore \alpha = 0.749\theta$

$2 - 0.749 = 1.251 \quad \therefore \beta = 1.251\theta$

EWD = 4.280d (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')

$$IWD = [M_p \times 1.0 \times \theta \times 2 \times 2] + \{ [M_p \times 1.5 \times 0.75 \times \theta \times 2] + [M_p \times 1.0 \times 1.25 \times \theta \times 2] \}$$

$$+ [M_p \times 2.0 \times \theta] + [M_p \times 2.0 \times \theta] + M_p \times 4 \times \theta + [M_p \times 4 \times \theta] + [M_p \times 2.5 \times \theta \times 2]$$

$$IWD = [M_p \times 1.0 \times \frac{d}{0.1} \times 2 \times 2] + [M_p \times 1.5 \times 0.75 \times \frac{d}{1.0} \times 2] + [M_p \times 1.0 \times 1.25 \times \frac{d}{1.5} \times 2]$$

$$+ [M_p \times 2.0 \times \frac{d}{1.0}] + [M_p \times 2.0 \times \frac{d}{1.5}] + [M_p \times 4 \times \frac{d}{1.5}] + [M_p \times 4 \times \frac{d}{1.0}] + [M_p \times 2.5 \times \frac{d}{1.0} \times 2]$$

$$IWD = 4M_{pd} + (2.250M_{pd} + 1.667M_{pd}) + (2M_{pd} + 1.333M_{pd}) + 2.667M_{pd} + 4M_{pd} + 5M_{pd}$$

$$IWD = 22.917M_{pd}$$

EWD = IWD

$$4.280d = 22.917M_{pd}$$

$$M_p = 0.187 \text{ kNm/m}$$

Appendix D11 - 1.2m high/wide lower diagonal yield line calculation

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY	School of Marine Science & Engineering	Job N°	Section	Sheet N°	Rev
		Engineer	SK	Checked	
		Date	24/11/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 1.2m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$
 $\alpha = \tan^{-1}\left(\frac{1.2}{1.3}\right) = 42.709$
 $42.709 \div 45 = 0.949 \quad \therefore \alpha = 0.949\theta$
 $2 - 0.949 = 1.051 \quad \therefore \beta = 1.051\theta$

EWD = $4 \cdot 280\theta$ (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')

$IWD = \left[\frac{M_p \times 1.2 \times \theta}{2} \times 2 \right] + \left\{ \left[\frac{M_p \times 1.3 \times 0.95\theta}{2} \right] + \left[\frac{M_p \times 1.2 \times 1.05\theta}{2} \right] \right\} + \left[\frac{M_p \times 1.6 \times \theta}{2} + \frac{M_p \times 1.6 \times \theta}{2} \right]$
 $+ \left[\frac{M_p \times 4 \times \theta}{2} \right] + \left[\frac{M_p \times 4 \times \theta}{2} \right] + \left[\frac{M_p \times 2.5 \times \theta}{2} \right]$

$IWD = \left[\frac{M_p \times 1.2 \times \frac{\theta}{1.2}}{2} \times 2 \right] + \left\{ \left[\frac{M_p \times 1.3 \times 0.95 \times \frac{\theta}{1.2}}{2} \right] + \left[\frac{M_p \times 1.2 \times 1.05 \times \frac{\theta}{1.3}}{2} \right] \right\}$
 $+ \left[\frac{M_p \times 1.6 \times \frac{\theta}{1.2}}{2} + \frac{M_p \times 1.6 \times \frac{\theta}{1.3}}{2} \right] + \left[\frac{M_p \times 4 \times \frac{\theta}{1.3}}{2} \right] + \left[\frac{M_p \times 4 \times \frac{\theta}{1.2}}{2} \right] + \left[\frac{M_p \times 2.5 \times \frac{\theta}{1.2}}{2} \right]$

$IWD = 4M_p\theta + (2.058M_p\theta + 1.938M_p\theta) + (1.333M_p\theta + 1.231M_p\theta) + 3.077M_p\theta + 3.333M_p\theta + 4.167M_p\theta$

$IWD = 21.137M_p\theta$

EWD = IWD

$4 \cdot 280\theta = 21.137M_p\theta$

$M_p = 0.202 \text{ kNm/m}$

Appendix D12 - 1.5m high/wide lower diagonal yield line calculation

<p>MARINE SCIENCE & ENGINEERING School of Marine Science & Engineering WITH PLYMOUTH UNIVERSITY</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	25/11/15	Rev. Date	

Project: Dissertation - PROCESZ Project 2

Element: 1.5m high/wide lower diagonal yield line - yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{1.5}{1.0}\right) = 56.310^\circ$

$56.310 \div 45 = 1.251$ $\therefore \alpha = 1.251\theta$

$2 - 1.251 = 0.749$ $\therefore \beta = 0.749\theta$

$EWD = 4.280d$ (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')

$IWD = [(M_p \times 1.5 \times \theta) \times 2 \times 2] + \{[(M_p \times 1.0 \times 1.25\theta) \times 2] + [(M_p \times 1.5 \times 0.75\theta) \times 2]\} + [(M_p \times 1.0 \times \theta) + (M_p \times 1.0 \times \theta)]$
 $+ (M_p \times 4 \times \theta) + (M_p \times 4 \times \theta) + (M_p \times 2.5 \times \theta) \times 2$

$IWD = [(M_p \times 1.5 \times \frac{\theta}{1.5}) \times 2 \times 2] + \{[(M_p \times 1.0 \times 1.25 \times \frac{\theta}{1.5}) \times 2] + [(M_p \times 1.5 \times 0.75 \times \frac{\theta}{1.5}) \times 2]\}$
 $+ [(M_p \times 1.0 \times \frac{\theta}{1.5}) + (M_p \times 1.0 \times \frac{\theta}{1.5})] + (M_p \times 4 \times \frac{\theta}{1.5}) + (M_p \times 4 \times \frac{\theta}{1.5}) + [(M_p \times 2.5 \times \frac{\theta}{1.5}) \times 2]$

$IWD = 4M_{pd} + (1.667M_{pd} + 2.250M_{pd}) + (0.667M_{pd} + 1M_{pd}) + 4M_{pd} + 2.667M_{pd} + 3.333M_{pd}$


$IWD = 19.584M_{pd}$

$EWD = IWD$

$4.280d = 19.584M_{pd}$

$M_p = 0.219 \text{ rd/m/m}$

Appendix D13 - 2.0m high/wide lower diagonal yield line calculation
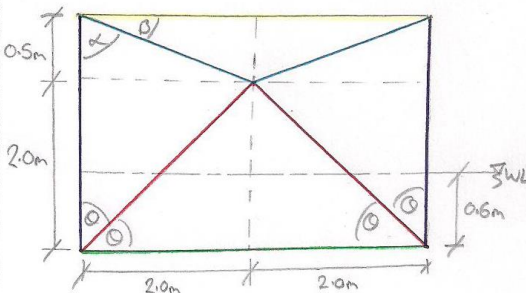
<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer <i>SK</i>	<i>SK</i>	1	Checked
	Date <i>28/11/15</i>	<i>28/11/15</i>		Rev. Date
<p>Project: Dissertation - PRCES07 Project 2</p> <p>Element: 2.0 high/wide lower diagonal yield line - yield line analysis</p>				
				
<p>$\theta = 45^\circ$ $\alpha = \tan^{-1}\left(\frac{2.0}{0.5}\right) = 75.964^\circ$ $75.964 \div 45 = 1.688 \therefore \alpha = 1.688\theta$ $2 - 1.688 = 0.312 \therefore \beta = 0.312\theta$</p>				
<p>$EWD = 4.280d$ (same as in '0.6m high/wide lower diagonal yield line - yield line analysis')</p>				
$IWD = \left[(M_p \times 2.0 \times \theta) \times 2 \times 2 \right] + \left[(M_p \times 0.5 \times 1.69 \theta) \times 2 \right] + \left[(M_p \times 2.0 \times 0.31 \theta) \times 2 \right] + (M_p \times 4 \times \theta) + (M_p \times 4 \times \theta) + \left[(M_p \times 2.5 \times \theta) \times 2 \right]$				
$IWD = \left[(M_p \times 2.0 \times \frac{d}{2.0}) \times 2 \times 2 \right] + \left[(M_p \times 0.5 \times 1.69 \times \frac{d}{2.0}) \times 2 \right] + \left[(M_p \times 2.0 \times 0.31 \times \frac{d}{0.5}) \times 2 \right] + (M_p \times 4 \times \frac{d}{2.0}) + (M_p \times 4 \times \frac{d}{0.5}) + \left[(M_p \times 2.5 \times \frac{d}{2.0}) \times 2 \right]$				
$IWD = 4M_{pd} + (0.845M_{pd} + 2.480M_{pd}) + 2M_{pd} + 8M_{pd} + 2.5M_{pd}$				
$IWD = 19.825M_{pd}$				
$EWD = IWD$				
$4.280d = 19.825M_{pd}$				
$M_p = 0.216 \text{ radm/m}$				

Appendix E - Original panel modelled as a simply supported beam spanning vertically

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	22/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: Panel modelled as a simply supported beam spanning vertically

$$M_{\max} = \frac{Wa}{3} \times \left(1 - m + \frac{2m}{3} \times \sqrt{\frac{m'}{3}} \right) ; m = \frac{a}{L} = \frac{0.6}{2.5} = 0.24$$

$$W = \rho \times g \times h$$

$$W = 1000 \times 9.81 \times 0.6$$

$$W = 5.886 \text{ kN/m}^2$$

$$M_{\max} = \frac{5.886 \times 0.6}{3} \times \left(1 - 0.24 + \frac{2 \times 0.24}{3} \times \sqrt{\frac{0.24}{3}} \right)$$

$$= 1.177 \times (0.760 + 0.045)$$

$$= \underline{\underline{0.947 \text{ kNm}}}$$

Using Steel Designers' Manual (Davison and Owens, 2012)

Appendix F - Tabulated FEA results for maximum bending moment with varying panel width

Wall Width (m)	Maximum Bending Moment (kNm/m)
1	0.0339
2	0.1495
4	0.1994
6	0.2217
8	0.2307
10	0.2311

Appendix G - Original panel modelled as beam with fixed supports spanning vertically

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	22/11/15	Rev. Date	

Project: Dissertation - PRCE 507 Project 2

Element: Panel modelled as a beam with fixed supports spanning vertically

In AC: $M_{bc} = R_B \times x + M_B - \frac{2W(x-b)^3}{6ab}$

$$R_B = \frac{Wa^2}{10L^3} \times (5L - 2a)$$

$$= \frac{5.886 \times 0.6^2}{10 \times 2.5^3} \times (5 \times 2.5 - 2 \times 0.6)$$

$$= 0.0136 \times 11.3$$

$$= \underline{0.1532 \text{ kN}}$$

$$M_B = -\frac{Wb^2}{30L^2} (5L - 3a)$$

$$= -\frac{5.886 \times 0.6^2}{30 \times 2.5^2} \times (5 \times 2.5 - 3 \times 0.6)$$

$$= \underline{-0.0484 \text{ kNm}}$$

@ $x = 2.0 \text{ m}$

$$M_{bc} = 0.1532 \times 2.0 - 0.0484 - \frac{2 \times 5.886 \times (2.0 - 1.9)^3}{6 \times 0.6 \times 1.9}$$

$$= \underline{0.2563 \text{ kNm}}$$

@ $x = 2.1 \text{ m}$

$$M_{bc} = 0.1532 \times 2.1 - 0.0484 - \frac{2 \times 5.886 \times (2.1 - 1.9)^3}{6 \times 0.6 \times 1.9}$$

$$= \underline{0.2596 \text{ kNm}}$$

@ $x = 2.2 \text{ m}$

$$M_{bc} = 0.1532 \times 2.2 - 0.0484 - \frac{2 \times 5.886 \times (2.2 - 1.9)^3}{6 \times 0.6 \times 1.9}$$

$$= \underline{0.2422 \text{ kNm}}$$

@ $x = 2.05 \text{ m}$

$$M_{bc} = 0.1532 \times 2.05 - 0.0484 - \frac{2 \times 5.886 \times (2.05 - 1.9)^3}{6 \times 0.6 \times 1.9}$$

$$= \underline{0.2599 \text{ kNm}} = 0.260 \text{ kNm}$$

Using Steel Designers' Manual (Davison and Owens, 2012)

Appendix H - Tabulated yield line analysis results for maximum bending moment with varying panel width

Wall Width (m)	Lower Diagonal Yield Line Height/Width (m)	Maximum Bending Moment (kNm/m)
1	0.5	0.003
2	0.5	0.02
4	0.6	0.192
6	0.7	0.345
8	0.7	0.563
10	0.7	0.797

Appendix I1 - 1m wide wall panel yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	1	Checked
	Date	8/12/15		Rev. Date

Project: Dissertation - PRCES07 Project 2

Element: 1.0m wide wall panel yield line calculation

$\theta = 45^\circ$

EWD:

$$\text{Load} = \rho \cdot g \cdot h_0 \cdot A$$

$$= 1000 \times 9.81 \times (0.1 + \frac{2}{3} \times 0.5) \times (\frac{0.5 \times 0.5}{2})$$

$$= 531.375 \text{ N} = \underline{0.531 \text{ kN}}$$

$$\text{Load} = 1000 \times 9.81 \times (0.1 + \frac{1}{3} \times 0.5) \times (\frac{0.5 \times 0.5}{2})$$

$$= 327.000 \text{ N} = \underline{0.327 \text{ kN}}$$

$$\text{Load} = 1000 \times 9.81 \times 0.05 \times (0.1 \times 0.5)$$

$$= 24.525 \text{ N} = \underline{0.025 \text{ kN}}$$

$$\text{EWD} = [0.531 \times (\frac{0.5 \times 0.5}{2}) \times \frac{d}{3}] \times 2 + [0.327 \times (\frac{0.5 \times 0.5}{2}) \times \frac{d}{3}] \times 2 + [0.025 \times (0.5 \times 0.1) \times \frac{d}{2}] \times 2$$

$$\text{EWD} = 0.044d + 0.027d + 1.250 \times 10^{-3}d$$

$$\text{EWD} = \underline{0.072d}$$

Job N°	Section	Sheet N° 2	Rev
Engineer	SK	Checked	
Date	8/12/15	Rev. Date	

Project: Dissertation - PRCE 507 Project 2

Element: 1.0m wide wall panel yield line calculation

$$IWD = [(M_p \times 0.5 \times 4) \times 2] + [(M_p \times 1.5 \times 2) \times 2] + [(M_p \times 1 \times 2) \times 2] + [(M_p \times 2.5 \times 2) \times 2]$$

$$IWD = [(M_p \times 0.5 \times \frac{d}{0.5}) \times 4 \times 2] + [(M_p \times 1.5 \times \frac{d}{0.5}) \times 2] + [(M_p \times 1 \times \frac{d}{0.5}) \times 2] + [(M_p \times 2.5 \times \frac{d}{0.5}) \times 2]$$

$$IWD = 8M_p d + 6M_p d + 4M_p d + 10M_p d$$

$$IWD = 28.000M_p d$$

$$EWD = IWD$$

$$0.072d = 28.000M_p d$$

$$M_p = 2.571 \times 10^{-3} \text{ kNm/m}$$

Appendix I2 - 2m wide wall panel yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N° 1	Rev
	Engineer	SK	Checked	
	Date	8/12/15	Rev. Date	

Project: Dissertation - PROCES7 Project 2

Element: 2.0m wide wall panel yield line calculation

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.5}{2.0}\right) = 14.036$

$14.036 + 45 = 0.312 \quad \therefore \alpha = 0.3120$

$2 - 0.312 = 1.688 \quad \therefore \beta = 1.6880$

$\tan(14.036) = \frac{x}{1.9}$

$x = 0.475m$

$0.5 - 0.475 = 0.025m$

EWD:

Load = $\rho \cdot g \cdot h_0 \cdot A$

$= 1000 \times 9.81 \times (0.1 + \frac{2}{3} \times 0.5) \times (\frac{0.5 \times 0.5}{2})$

$= 531.375N = 0.531kN$

Load = $1000 \times 9.81 \times (0.1 + \frac{1}{3} \times 0.5) \times (\frac{0.5 \times 0.5}{2})$

$= 327.000N = 0.327kN$

Load = $1000 \times 9.81 \times (0.1 + \frac{0.5}{2}) \times (1 \times 0.5)$

$= 1716.750N = 1.717kN$

Load = $1000 \times 9.81 \times (\frac{0.1}{2}) \times (0.1 \times 1.0)$

$= 49.050N = 0.049kN$

Load = $1000 \times 9.81 \times (\frac{0.1}{2}) \times (0.1 \times 0.475)$

$= 23.299N = 0.023kN$

Load = $1000 \times 9.81 \times (\frac{0.1}{2}) \times (0.1 \times 0.025)$

$= 1.226N = 0.0012kN$

Using knowledge that lower triangle will receive $\frac{2}{3}$ of this loading:

\therefore Lower triangle = $0.0012 \times \frac{2}{3} = 0.0008kN$

\therefore Upper triangle = $0.0012 \times \frac{1}{3} = 0.0004kN$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	8/12/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 2.0m wide wall panel yield line calculation

$$EWD = \left[0.531 \times \left(\frac{0.5 \times 0.5}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[0.327 \times \left(\frac{0.5 \times 0.5}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[1.717 \times (1 \times 0.5) \times \frac{d}{2} \right] \\ + \left[0.049 \times (1 \times 0.1) \times \frac{d}{2} \right] + \left[0.023 \times (1 \times 0.475) \times \frac{d}{2} \right] \times 2 + \left[0.0004 \times \left(\frac{0.025 \times 0.1}{2} \right) \times \frac{d}{3} \right] \times 2 \\ + \left[0.0008 \times \left(\frac{0.025 \times 0.1}{2} \right) \times \frac{d}{3} \right] \times 2$$

$$EWD = 0.044d + 0.027d + 0.429d + 0.002d + 0.001d + 3.333 \times 10^{-7}d + 6.667 \times 10^{-7}d \\ \text{(Negligible but included to show process)}$$

$$EWD = 0.503d$$

$$IWD = \left[(M_p \times 0.5 \times d) \times 2 \times 2 \right] + \left\{ \left[(M_p \times 2 \times 0.31d) \times 2 \right] + \left[(M_p \times 0.5 \times 1.69d) \times 2 \right] \right\} + \left[(M_p \times 1.0 \times d) + (M_p \times 1.0 \times d) \right] \\ + (M_p \times 2 \times d) + (M_p \times 2 \times d) + \left[(M_p \times 2.5 \times d) \times 2 \right]$$

$$IWD = \left[(M_p \times 0.5 \times \frac{d}{0.5}) \times 2 \times 2 \right] + \left\{ \left[(M_p \times 2 \times 0.31 \times \frac{d}{0.5}) \times 2 \right] + \left[(M_p \times 0.5 \times 1.69 \times \frac{d}{2.0}) \times 2 \right] \right\} + \left[(M_p \times 1.0 \times \frac{d}{0.5}) + (M_p \times 1.0 \times \frac{d}{2.0}) \right] \\ + (M_p \times 2 \times \frac{d}{0.5}) + (M_p \times 2 \times \frac{d}{2.0}) + \left[(M_p \times 2.5 \times \frac{d}{0.5}) \times 2 \right]$$

$$IWD = 4M_p d + (2.480M_p d + 0.845M_p d) + (2M_p d + 0.5M_p d) + 4M_p d + M_p d + 10M_p d$$

$$IWD = 24.825M_p d$$

$$EWD = IWD$$

$$0.503d = 24.825M_p d$$

$$M_p = 0.0202 \text{ kNm/m}$$

Appendix I3 - 6m wide wall panel yield line calculation

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	13/12/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 6.0m wide wall panel yield line calculation

$$\theta = 45^\circ$$

$$\alpha = \tan^{-1}\left(\frac{0.7}{1.8}\right) = 21.251^\circ$$

$$21.251 \div 45 = 0.472 \quad \therefore \alpha = 0.472\theta$$

$$2 - 0.472 = 1.528 \quad \therefore \beta = 1.528\theta$$

EWD:

$$\text{Load} = \rho \cdot g \cdot h_g \cdot A$$

$$= 1000 \times 9.81 \times \left(\frac{2}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$$

$$= 706.320 \text{ N} = 0.706 \text{ kN}$$

$$\text{Load} = 1000 \times 9.81 \times \left(\frac{1}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$$

$$= 353.160 \text{ N} = 0.353 \text{ kN}$$

$$\text{Load} = 1000 \times 9.81 \times \frac{0.6}{2} \times (0.6 \times 4.8)$$

$$= 8475.840 \text{ N} = 8.476 \text{ kN}$$

$$\text{EWD} = \left[0.706 \times \left(\frac{0.6 \times 0.6}{2}\right) \times \frac{d}{3}\right] \times 2 + \left[0.353 \times \left(\frac{0.6 \times 0.6}{2}\right) \times \frac{d}{3}\right] \times 2 + \left[8.476 \times (4.8 \times 0.6) \times \frac{d}{2}\right]$$

$$\text{EWD} = 0.085d + 0.042d + 12.205d$$

$$\text{EWD} = 12.332d$$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	13/12/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 6.0m wide wall panel yield line calculation

$$IWD = [(M_p \times 0.7 \times 0) \times 2 \times 2] + \{ [(M_p \times 1.8 \times 0.470) \times 2] + [(M_p \times 0.7 \times 1.530) \times 2] \} + [(M_p \times 4.6 \times 0) + (M_p \times 4.6 \times 0)] \\ + (M_p \times 6 \times 0) + (M_p \times 6 \times 0) + [(M_p \times 2.5 \times 0) \times 2]$$

$$IWD = [(M_p \times 0.7 \times \frac{0}{0.7}) \times 2 \times 2] + \{ [(M_p \times 1.8 \times 0.47 \times \frac{0}{0.7}) \times 2] + [(M_p \times 0.7 \times 1.53 \times \frac{0}{1.8}) \times 2] \} + [(M_p \times 4.6 \times \frac{0}{0.7}) + (M_p \times 4.6 \times \frac{0}{1.8})] \\ + (M_p \times 6 \times \frac{0}{0.7}) + (M_p \times 6 \times \frac{0}{1.8}) + [(M_p \times 2.5 \times \frac{0}{0.7}) \times 2]$$

$$IWD = 4M_p d + (2.417M_p d + 1.190M_p d) + (6.571M_p d + 2.555M_p d) + 8.571M_p d + 3.333M_p d + 7.143d$$

$$IWD = 35.780M_p d$$

$$EWD = IWD$$

$$12.332d = 35.780M_p d$$

$$M_p = 0.345 \text{ kNm/m}$$

Appendix I4 - 8m wide wall panel yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	13/12/15	Rev. Date	

Project: Dissertation - PRC507 Project 2

Element: 8.0m wide wall panel yield line calculation

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.7}{1.8}\right)$

$\alpha = 21.251^\circ$

$21.251 \div 45 = 0.472 \quad \therefore \alpha = 0.472\theta$

$2 - 0.472 = 1.528 \quad \therefore \beta = 1.528\theta$

EWD:

Load = $p \cdot g \cdot h_g \cdot A$

$= 1000 \times 9.81 \times \left(\frac{2}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$

$= 706.320 \text{ N} = 0.706 \text{ kN}$

Load = $1000 \times 9.81 \times \left(\frac{1}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$

$= 353.160 \text{ N} = 0.353 \text{ kN}$

Load = $1000 \times 9.81 \times \left(\frac{0.6}{2}\right) \times (0.6 \times 6.8)$

$= 12007.440 \text{ N} = 12.007 \text{ kN}$

$$\text{EWD} = \left[0.706 \times \left(\frac{0.6 \times 0.6}{2}\right) \times \frac{2}{3}\right] \times 2 + \left[0.353 \times \left(\frac{0.6 \times 0.6}{2}\right) \times \frac{2}{3}\right] \times 2 + \left[12.007 \times (6.8 \times 0.6) \times \frac{2}{2}\right]$$

$$\text{EWD} = 0.085 \text{ k} + 0.042 \text{ k} + 24.494 \text{ k}$$

$$\text{EWD} = 24.621 \text{ k}$$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	13/12/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: 8.0m wide wall panel yield line calculation

$$IWD = \frac{[M_p \times 0.7 \times 0] \times 2 \times 2}{(M_p \times 8 \times 0) + (M_p \times 8 \times 0) + [(M_p \times 2.5 \times 0) \times 2]} + \frac{[(M_p \times 1.8 \times 0.47) \times 2] + [(M_p \times 0.7 \times 1.53) \times 2]}{(M_p \times 6 \times 0) + (M_p \times 6 \times 0)}$$

$$IWD = \frac{[M_p \times 0.7 \times \frac{d}{0.7}] \times 2 \times 2}{(M_p \times 8 \times \frac{d}{0.7}) + (M_p \times 8 \times \frac{d}{1.8}) + [(M_p \times 2.5 \times \frac{d}{0.7}) \times 2]} + \frac{[(M_p \times 1.8 \times 0.47 \times \frac{d}{0.7}) \times 2] + [(M_p \times 0.7 \times 1.53 \times \frac{d}{1.8}) \times 2]}{(M_p \times 6 \times \frac{d}{0.7}) + (M_p \times 6 \times \frac{d}{1.8})}$$

$$IWD = 4M_{pd} + (2.417M_{pd} + 1.190M_{pd}) + (9.429M_{pd} + 3.667M_{pd}) + 11.429M_{pd} + 4.444M_{pd} + 7.143M_{pd}$$

$$IWD = 43.719M_{pd}$$

$$EWD = IWD$$

$$24.621d = 43.719M_{pd}$$

$$M_p = 0.563 \text{ kNm/m}$$

Appendix I5 - 10m wide wall panel yield line calculation

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	13/12/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: 10.0m wide wall panel yield line calculation

$\theta = 45^\circ$
 $\alpha = \tan^{-1}\left(\frac{0.7}{1.8}\right)$
 $\alpha = 21.251^\circ$
 $21.251 \div 45 = 0.472 \therefore \kappa = 0.472$
 $2 - 0.472 = 1.528 \therefore \beta = 1.528$

EWD:

$Load = \rho \cdot g \cdot h_f \cdot A$
 $= 1000 \times 9.81 \times \left(\frac{2}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$
 $= 706.320 N = 0.706 kN$

$Load = 1000 \times 9.81 \times \left(\frac{1}{3} \times 0.6\right) \times \left(\frac{0.6 \times 0.6}{2}\right)$
 $= 353.160 N = 0.353 kN$

$Load = 1000 \times 9.81 \times \left(\frac{0.6}{2}\right) \times (0.6 \times 8.8)$
 $= 15539.040 N = 15.539 kN$

$EWD = \left[0.706 \times \left(\frac{0.6 \times 0.6}{2}\right) \times \frac{\sqrt{2}}{3}\right] \times 2 + \left[0.353 \times \left(\frac{0.6 \times 0.6}{2}\right) \times \frac{\sqrt{2}}{3}\right] \times 2 + \left[15.539 \times (8.8 \times 0.6) \times \frac{\sqrt{2}}{2}\right]$

$EWD = 0.085d + 0.042d + 41.023d$

$EWD = 41.150d$

Job N°	Section	Sheet N°	Rev
		1	
Engineer	SK	Checked	
Date	13/12/15	Rev. Date	

Project: Dissertation - PRCESO7 Project 2

Element: 10.0m wide wall panel yield line calculation

$$IWD = [(M_p \times 0.7 \times 0) \times 2 \times 2] + [(M_p \times 1.8 \times 0.470) \times 2] + [(M_p \times 0.7 \times 1.530) \times 2] + [(M_p \times 8.6 \times 0) + (M_p \times 8.6 \times 0)] \\ + (M_p \times 10 \times 0) + (M_p \times 10 \times 0) + [(M_p \times 2.5 \times 0) \times 2]$$

$$IWD = [(M_p \times 0.7 \times \frac{1}{0.7}) \times 2 \times 2] + [(M_p \times 1.8 \times 0.47 \times \frac{0}{0.7}) \times 2] + [(M_p \times 0.7 \times 1.53 \times \frac{0}{1.8}) \times 2] + [(M_p \times 8.6 \times \frac{0}{0.7}) + (M_p \times 8.6 \times \frac{0}{1.8})] \\ + (M_p \times 10 \times \frac{0}{0.7}) + (M_p \times 10 \times \frac{0}{1.8}) + [(M_p \times 2.5 \times \frac{0}{0.7}) \times 2]$$

$$IWD = 4M_{pd} + (2 \cdot 417M_{pd} + 1.190M_{pd}) + (12.286M_{pd} + 4.778M_{pd}) + 14.286M_{pd} + 5.556M_{pd} + 7.143M_{pd}$$

$$IWD = 51.656M_{pd}$$

$$EWD = IWD$$

$$41.150af = 51.656M_{pd}$$


$$M_p = 0.797 \text{ kNm/m}$$

Appendix J - Free top edge yield line analysis calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	7/12/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: Free top edge yield line calculation

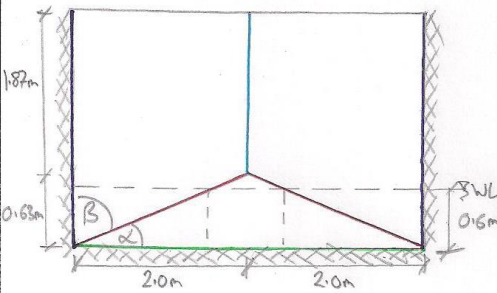


$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{0.63}{2.0}\right) = 17.484^\circ$

$17.484 \div 45 = 0.389 \therefore \alpha = 0.389\theta$

$2 - 0.389 = 1.611 \therefore \beta = 0.611\theta$

EWD:

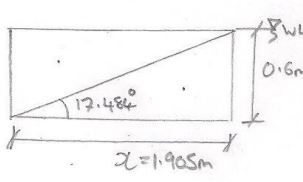

$\tan(17.484) = \frac{0.6}{x}$

$x = 1.905m$

Load = $p \cdot g \cdot h_g \cdot A$


$= 1000 \times 9.81 \times \frac{0.6}{2} \times (0.6 \times 1.905)$

$= 3363.849N = 3.364kN$

Using knowledge that lower triangle will receive $\frac{2}{3}$ of this load in comparison to the upper triangle which will receive $\frac{1}{3}$.

\therefore Upper triangle = $3.364 \times \frac{1}{3} = 1.121kN$

\therefore Lower triangle = $3.364 \times \frac{2}{3} = 2.243kN$



$4 - 1.905 \times 2 = 0.190m$

Load = $1000 \times 9.81 \times \frac{0.6}{2} \times (0.6 \times 0.190)$

$= 335.502N = 0.335kN$

Job N°	Section	Sheet N°	Rev
Engineer	SK	Checked	
Date	7/12/15	Rev. Date	

Project: Dissertation - PRCE 507 Project 2

Element: Free top edge yield line calculation

$$EWD = [1.121 \times (\frac{0.6 \times 1.905}{2}) \times \frac{d}{3}] \times 2 + [2.243 \times (\frac{0.6 \times 1.905}{2}) \times \frac{d}{3}] \times 2 + [0.335 \times (0.6 \times 0.190) \times \frac{d}{2}]$$

$$EWD = 0.427d + 0.855d + 0.019d$$

$$EWD = 1.301d$$

$$IWD = \{ [M_p \times 2.0 \times 0.39d] \times 2 + [M_p \times 0.63 \times 1.61d] \times 2 \} + [M_p \times 1.87 \times d] \times 2 + [M_p \times 4 \times d] + [M_p \times 2.5 \times d] \times 2$$

$$IWD = \{ [M_p \times 2.0 \times 0.39 \times \frac{d}{0.63}] \times 2 + [M_p \times 0.63 \times 1.61 \times \frac{d}{2.0}] \times 2 \} + [M_p \times 1.87 \times \frac{d}{2}] \times 2 + [M_p \times 4 \times \frac{d}{0.63}] + [M_p \times 2.5 \times \frac{d}{2}] \times 2$$

$$IWD = (2.476M_p d + 1.014M_p d) + 1.870M_p d + 6.349M_p d + 2.5M_p d$$

$$IWD = 14.209M_p d$$

$$EWD = IWD$$

$$1.301d = 14.209M_p d$$

$$M_p = 0.092 \text{ kNm/m}$$

Appendix K1 - Opening for door frame yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	29/11/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: Panel opening for door yield line analysis

$\theta = 45^\circ$

$\alpha = \tan^{-1}\left(\frac{1.55}{0.35}\right) = 77.276^\circ$

$77.276 \div 45 = 1.717 \quad \therefore \alpha = 1.717\theta$

$2 - 1.717 = 0.283 \quad \therefore \beta = 0.283\theta$

EWD = $4 \cdot 280d$ (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')

$$IWD = \left[M_p \times 1.55 \times \alpha \times 2 \right] + \left\{ \left[M_p \times 0.35 \times 1.72\alpha \times 2 \right] + \left[M_p \times 1.55 \times 0.28\alpha \times 2 \right] \right\} + \left[M_p \times 4 \times \alpha \right]$$

$$+ \left[M_p \times 1.55 \times \theta \times 2 \right] + \left[M_p \times 2.5 \times \alpha \times 2 \right]$$

$$IWD = \left[M_p \times 1.55 \times \frac{d}{1.55} \times 2 \times 2 \right] + \left\{ \left[M_p \times 0.35 \times 1.72 \times \frac{d}{1.55} \times 2 \right] + \left[M_p \times 1.55 \times 0.28 \times \frac{d}{0.35} \times 2 \right] \right\}$$

$$+ \left[M_p \times 4 \times \frac{d}{0.35} \right] + \left[M_p \times 1.55 \times \frac{d}{1.55} \times 2 \right] + \left[M_p \times 2.5 \times \frac{d}{1.55} \times 2 \right]$$

$$IWD = 4M_p d + (0.777M_p d + 2.480M_p d) + 11.429M_p d + 2M_p d + 3.226M_p d$$

$$IWD = 23.912M_p d$$

EWD = IWD

$$4 \cdot 280d = 23.912M_p d$$

$$\underline{M_p = 0.179 \text{ kNm/m}}$$

Appendix K2 - Opening for window frame yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	29/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: Panel opening for window yield line analysis

$\alpha = 0.810m$

$\theta = 45^\circ$

$\alpha_1 = \tan^{-1}\left(\frac{1.35}{1.0}\right) = 53.471^\circ$

$53.471 \div 45 = 1.188 \therefore \alpha_1 = 1.188\theta$

$2 - 1.188 = 0.812 \therefore \beta_1 = 0.812\theta$

$\alpha_2 = \tan^{-1}\left(\frac{1.35}{0.5}\right) = 69.677^\circ$

$69.677 \div 45 = 1.548 \therefore \alpha_2 = 1.548\theta$

$2 - 1.548 = 0.452 \therefore \beta_2 = 0.452\theta$

$\tan(53.471) = \frac{x}{0.5}$

$x = 0.810m$

EWD:

Load = $p \cdot g \cdot h_c \cdot A$

$= 1000 \times 9.81 \times 0.3 \times (0.6 \times 2.38)$

$= 4202.604 N = 4.203 kN$

Load = $1000 \times 9.81 \times 0.3 \times (0.6 \times 0.810)$

$= 1430.298 N = 1.430 kN$

Using knowledge that the upper triangle will receive $\frac{1}{3}$ of this force:

- \therefore Upper triangle = $0.477 kN$
- \therefore Lower triangle = $0.953 kN$

Job N°	Section	Sheet N°	Rev
		2	
Engineer	SK	Checked	
Date	29/11/15	Rev. Date	

Project: Dissertation - PRICESO7 Project 2

Element: Panel opening for window yield line analysis

$$EWD = \left[0.477 \times \left(\frac{0.6 \times 0.81}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[0.953 \times \left(\frac{0.6 \times 0.81}{2} \right) \times \frac{d}{3} \right] \times 2 + \left[4.203 \times (0.6 \times 2.38) \times \frac{d}{2} \right]$$

$$EWD = 0.077d + 0.154d + 3.001d$$

$$EWD = 3.232d$$

$$IWD = \left\{ \left[(M_p \times 1.0 \times 1.19d) \times 2 \right] + \left[(M_p \times 1.35 \times 0.81d) \times 2 \right] \right\} + \left\{ \left[(M_p \times 0.5 \times 1.55d) \times 2 \right] + \left[(M_p \times 1.35 \times 0.45d) \times 2 \right] \right\} \\ + \left[(M_p \times 4 \times d) \right] + \left[(M_p \times 4 \times d) \right] + \left[(M_p \times 2.5 \times d) \times 2 \right]$$

$$IWD = \left\{ \left[(M_p \times 1.0 \times 1.19 \times \frac{d}{1.35}) \times 2 \right] + \left[(M_p \times 1.35 \times 0.81 \times \frac{d}{1.0}) \times 2 \right] \right\} + \left\{ \left[(M_p \times 0.5 \times 1.55 \times \frac{d}{1.35}) \times 2 \right] + \left[(M_p \times 1.35 \times 0.45 \times \frac{d}{0.5}) \times 2 \right] \right\} \\ + \left[(M_p \times 4 \times \frac{d}{0.5}) \right] + \left[(M_p \times 4 \times \frac{d}{1.0}) \right] + \left[(M_p \times 2.5 \times \frac{d}{1.35}) \times 2 \right]$$

$$IWD = (1.763M_{pd} + 2.187M_{pd}) + (1.148M_{pd} + 2.430M_{pd}) + 8M_{pd} + 4M_{pd} + 3.704M_{pd}$$

$$IWD = 23.232M_{pd}$$

$$EWD = IWD$$

$$3.232d = 23.232M_{pd}$$

$$M_p = 0.139 \text{ kNm/m}$$

Appendix K3 - Opening for large sliding door frame yield line calculation

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	29/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: Panel opening for large sliding door yield line analysis

$\theta = 45^\circ$

$\angle = \tan^{-1}\left(\frac{1.0}{0.4}\right) = 68.199^\circ$

$68.199 \div 45 = 1.516 \quad \therefore \alpha = 1.516\theta$

$2 - 1.516 = 0.484 \quad \therefore \beta = 0.484\theta$

EWD = 4.280d (Same as in '0.6m high/wide lower diagonal yield line - yield line analysis')

$$IWD = [(M_p \times 1.0 \times \theta) \times 2 \times 2] + [(M_p \times 0.4 \times 1.516\theta) \times 2] + [(M_p \times 1.0 \times 0.484\theta) \times 2]$$

$$+ (M_p \times 4 \times \theta) + (M_p \times 1 \times \theta) \times 2 + (M_p \times 2.5 \times \theta) \times 2$$

$$IWD = [(M_p \times 1.0 \times \frac{\theta}{1.0}) \times 2 \times 2] + [(M_p \times 0.4 \times 1.516 \times \frac{\theta}{1.0}) \times 2] + [(M_p \times 1.0 \times 0.484 \times \frac{\theta}{0.4}) \times 2]$$

$$+ (M_p \times 4 \times \frac{\theta}{0.4}) + (M_p \times 1 \times \frac{\theta}{1.0}) \times 2 + (M_p \times 2.5 \times \frac{\theta}{1.0}) \times 2$$

$$IWD = 4M_p d + (1.213M_p d + 2.420M_p d) + 10M_p d + 2M_p d + 5M_p d$$

$$IWD = 24.633 M_p d$$

EWD = IWD

$$4.280d = 24.633M_p d$$

$$\underline{M_p = 0.174 \text{ RM/m}}$$

Appendix L - Characteristic compressive strength of masonry calculation

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY	School of Marine Science & Engineering			Job N°	Section	Sheet N°	Rev
			Engineer	SK	Checked		
			Date	22/11/15	Rev. Date		
Project: Dissertation - PRCE 507 Project 2							
Element: Characteristic compressive strength of masonry calculation							
$f_b = 5 \text{ N/mm}^2$ <p>(Assuming a normalized mean compressive strength of the units, in the direction of the applied action effect of 5 N/mm)</p> $f_m = 4 \text{ N/mm}^2$ <p>(Mortar strength class M4)</p> $K = 0.40$ <p>(Constant for Clay Group 1, general purpose mortar)</p> $\alpha = 0.7 \text{ and } \beta = 0.3$ <p>(Constants for general purpose mortar)</p> $f_k = K f_b^\alpha f_m^\beta$ $f_k = 0.4 \times 5^{0.7} \times 4^{0.3}$ $\underline{f_k = 1.870 \text{ N/mm}^2}$							

Appendix M - Moment of resistance parallel to the bed joints calculations for different applied vertical loads

MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	22/11/15	Rev. Date	

Project: Dissertation - PRCES07 Project 2

Element: Moment of resistance parallel to bed joints for different applied vertical loads

The design vertical load per unit area is limited to: $< 0.2 \times \frac{f_k}{\gamma_M}$
 $< 0.2 \times \frac{1.870}{3}$
 $< 0.125 \text{ N/mm}^2$

Loading = 1 kN/m^2 ; Area = $4 \text{ m} \times 3 \text{ m} = 12 \text{ m}^2$

Total load supported by inner leaf = $12 \times 1 = 12 \text{ kN} = 12000 \text{ N}$
 Plan area of inner leaf = $4 \times 0.1 = 0.4 \text{ m}^2 = 400000 \text{ mm}^2$
 $\sigma_a = 12000 / 400000 = 0.03 \text{ N/mm}^2$
 $0.03 < 0.125 \therefore \text{OK}$

$M_{Rd1} = \left(\frac{f_{xk1}}{\gamma_M} + \sigma_a \right) \cdot Z$
 $= \left(\frac{0.3}{3} + 0.03 \right) \times \left(\frac{10^3 \times 100^2}{6} \times 2 \right) \times 10^{-6} = 0.433 \text{ kNm/m}$

Loading = 2 kN/m^2 ; Area = $4 \text{ m} \times 3 \text{ m} = 12 \text{ m}^2$

Total load supported by inner leaf = $12 \times 2 = 24 \text{ kN} = 24000 \text{ N}$
 Plan area of inner leaf = $4 \times 0.1 = 0.4 \text{ m}^2 = 400000 \text{ mm}^2$
 $\sigma_a = 24000 / 400000 = 0.06 \text{ N/mm}^2$
 $0.06 < 0.125 \therefore \text{OK}$

$M_{Rd1} = \left(\frac{0.3}{3} + 0.06 \right) \times \left(\frac{10^3 \times 100^2}{6} \times 2 \right) \times 10^{-6} = 0.533 \text{ kNm/m}$

Loading = 3 kN/m^2 ; Area = $4 \text{ m} \times 3 \text{ m} = 12 \text{ m}^2$

Total load supported by inner leaf = $12 \times 3 = 36 \text{ kN} = 36000 \text{ N}$
 Plan area of inner leaf = $4 \times 0.1 = 0.4 \text{ m}^2 = 400000 \text{ mm}^2$
 $\sigma = 36000 / 400000 = 0.09 \text{ N/mm}^2$
 $0.09 < 0.125 \therefore \text{OK}$

$M_{Rd1} = \left(\frac{0.3}{3} + 0.09 \right) \times \left(\frac{10^3 \times 100^2}{6} \times 2 \right) \times 10^{-6} = 0.633 \text{ kNm/m}$

Job N ^o	Section	Sheet N ^o	Rev
		2	
Engineer	SK	Checked	
Date	22/11/15	Rev. Date	

Project: Dissertation - PRCE507 Project 2

Element: Moment of resistance parallel to bed joints for different applied vertical loads

$$\text{Loading} = 4 \text{ kN/m}^2; \text{ Area} = 4 \text{ m} \times 3 \text{ m} = 12 \text{ m}^2$$

$$\text{Total area supported by inner leaf} = 12 \times 4 = 48 \text{ kN} = 48000 \text{ N}$$

$$\text{Plan area of inner leaf} = 4 \times 0.1 = 0.4 \text{ m}^2 = 400000 \text{ mm}^2$$

$$\sigma = 48000 / 400000 = 0.12 \text{ N/mm}^2$$

$$0.12 < 0.125 \therefore \text{OK}$$

$$M_{Rd,1} = \left(\frac{0.3}{3} + 0.12 \right) \times \left(\frac{10^3 \times 100^2}{6} \times 2 \right) \times 10^{-6} = 0.733 \text{ kNm/m}$$

$$\text{Loading} = 5 \text{ kN/m}^2; \text{ Area} = 4 \text{ m} \times 3 \text{ m} = 12 \text{ m}^2$$

$$\text{Total area supported by inner leaf} = 12 \times 5 = 60 \text{ kN} = 60000 \text{ N}$$

$$\text{Plan area of inner leaf} = 4 \times 0.1 = 0.4 \text{ m}^2 = 400000 \text{ mm}^2$$


$$\sigma = 60000 / 400000 = 0.15 \text{ N/mm}^2$$

$$0.15 > 0.125 \therefore \text{Fail.}$$


Appendix N - Tabulated design moment of resistance results for varied vertical loading (applied as a floor loading to 12m²)

Floor loading on per m² on 12m² area (kN/m²)	Design moment of resistance parallel to the bed joints (kNm/m)
0	0.333
1	0.433
2	0.533
3	0.633
4	0.733
5	Beyond masonry compression limit (see calculations in Appendix M)


Appendix O1 - Resultant stress contour of the original panel under applied vertical loading from 12m² with a loading of 0kN/m²

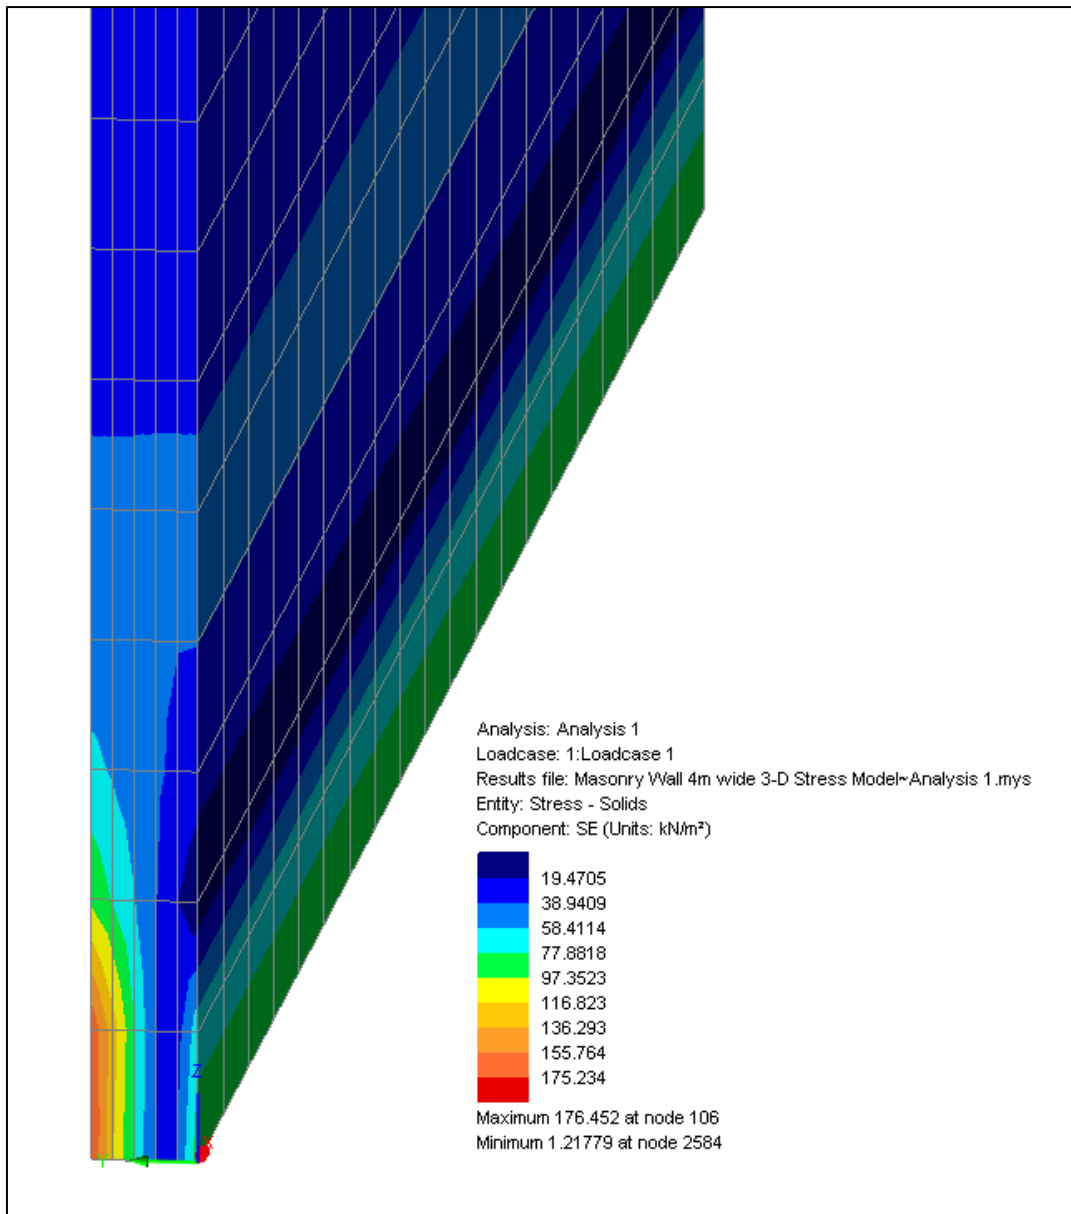


Appendix O2 - Resultant stress contour of the original panel under applied vertical loading from 12m² with a loading of 1kN/m²

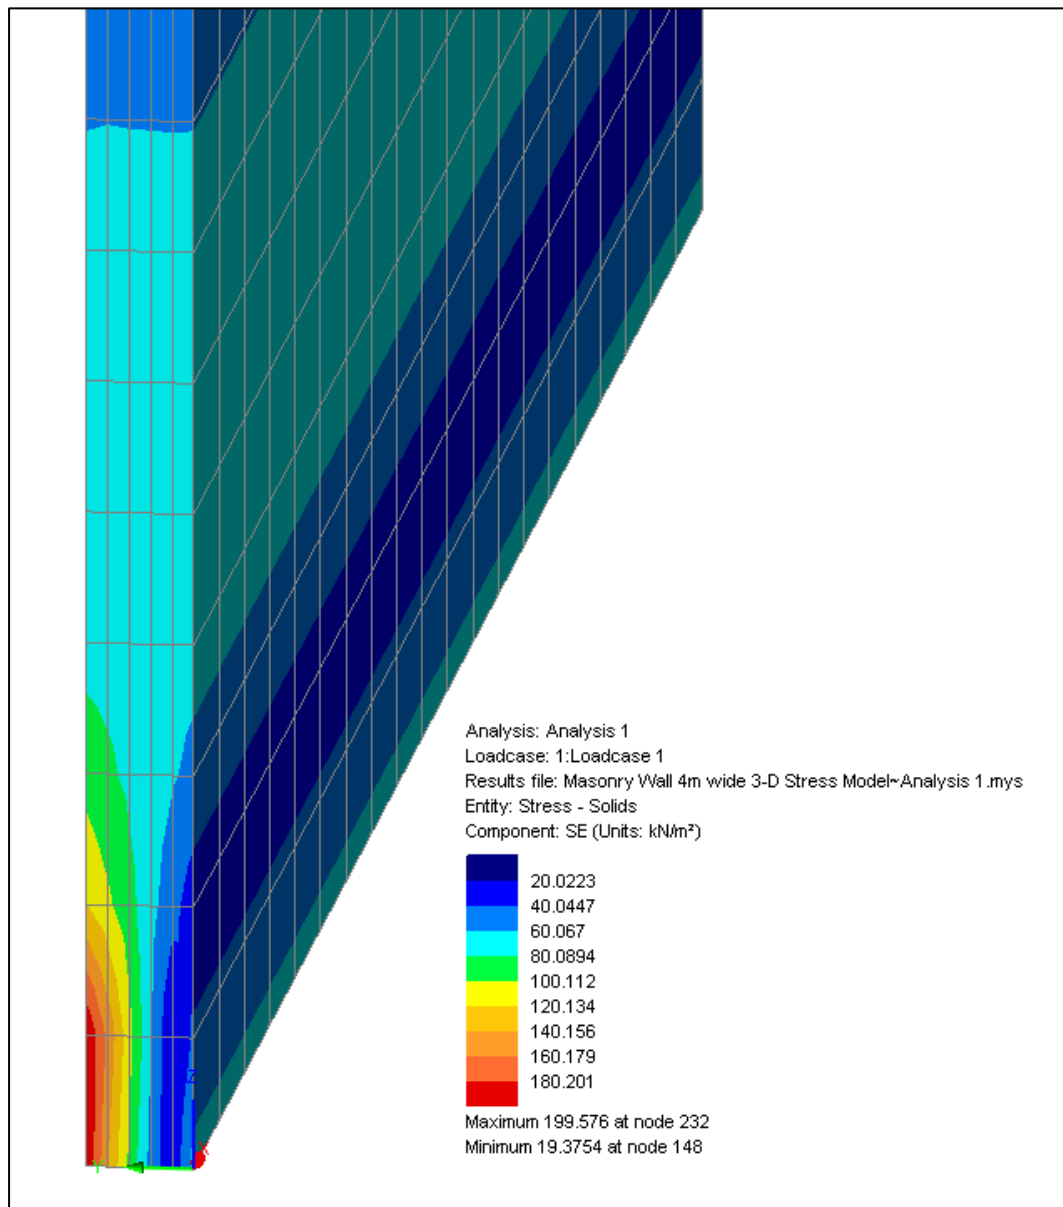


Appendix O3 - Resultant stress contour of the original panel under applied vertical loading from 12m² with a loading of 2kN/m²

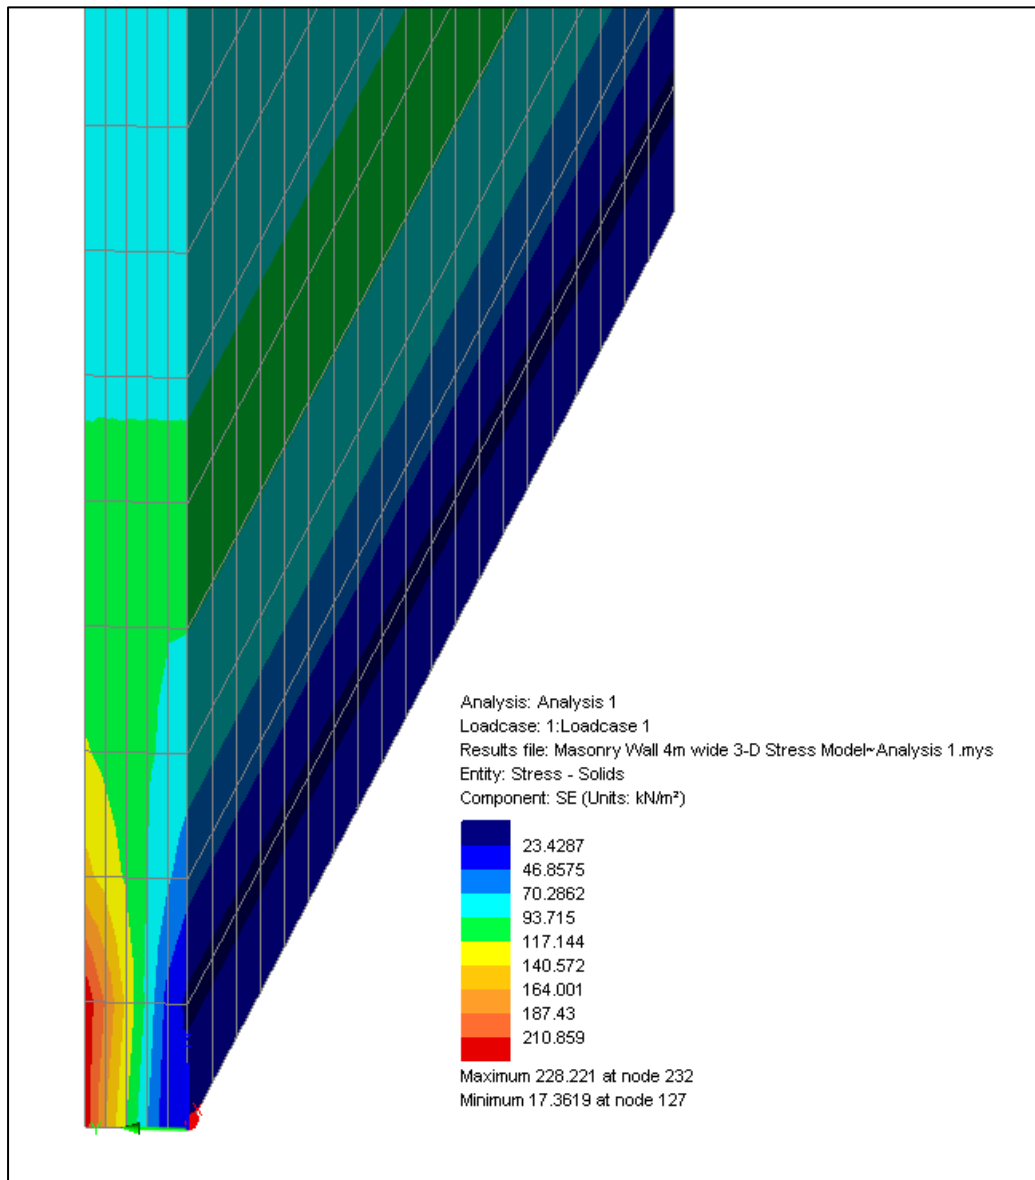


Appendix O4 - Resultant stress contour of the original panel under applied vertical loading from 12m² with a loading of 3kN/m²

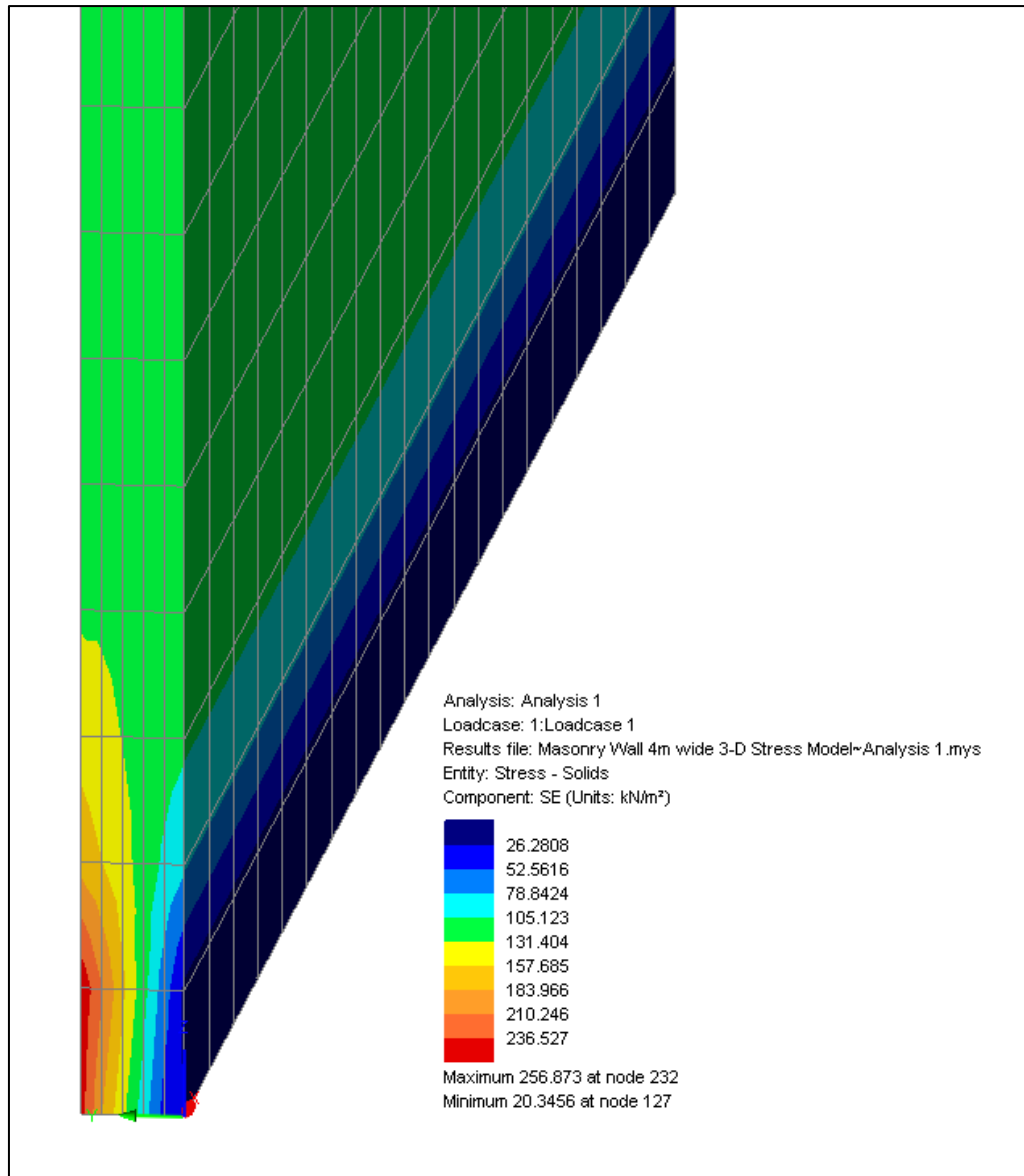

Appendix O5 - Resultant stress contour of the original panel under applied vertical loading from 12m² with a loading of 4kN/m²

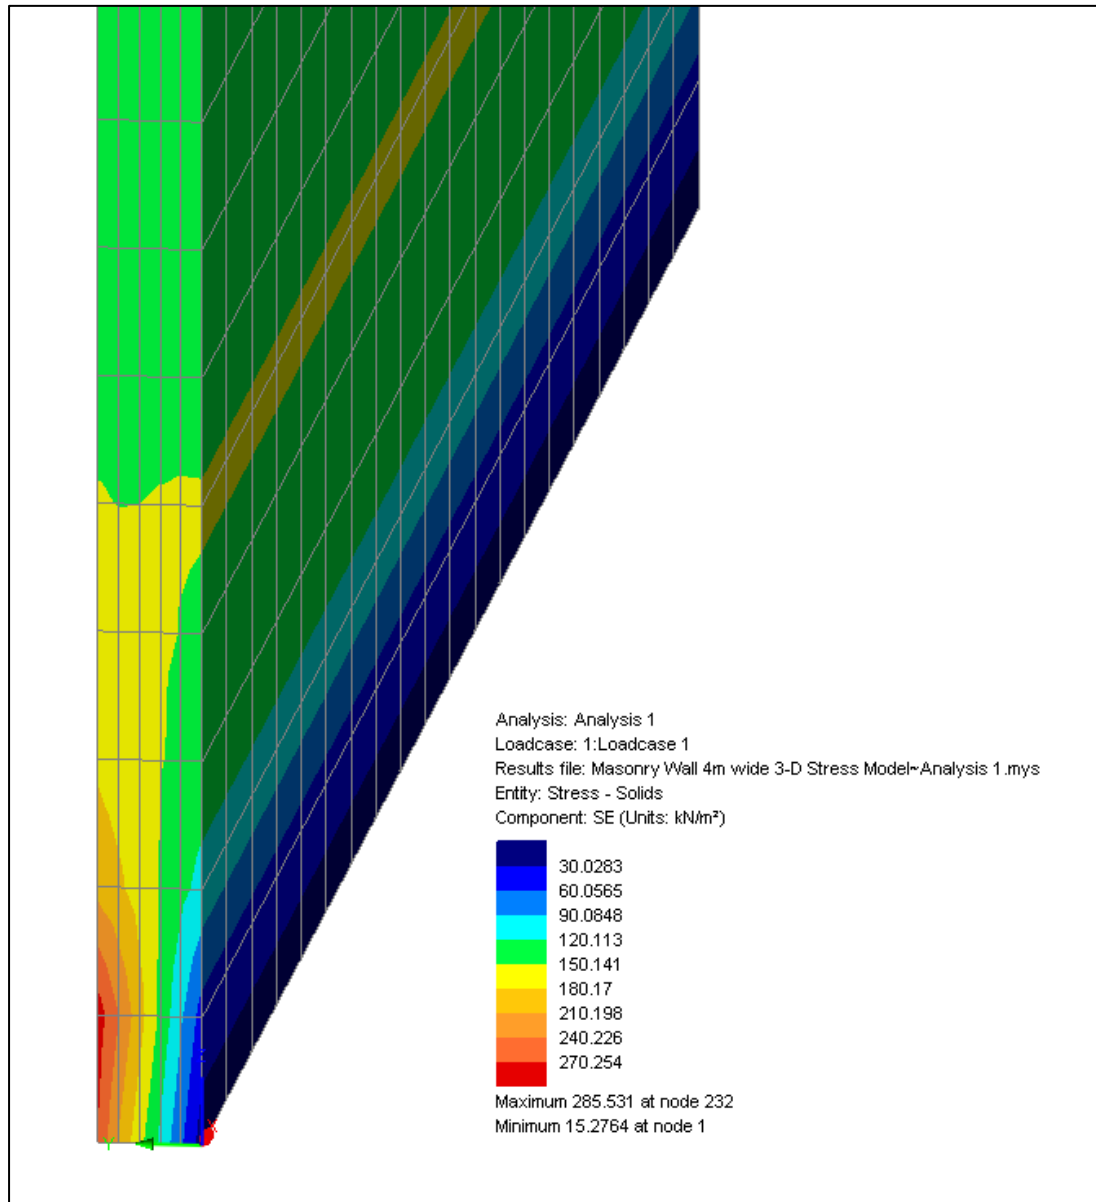

Appendix O6 - Resultant stress contour of the original panel under applied vertical loading from 12m² with a loading of 5kN/m²

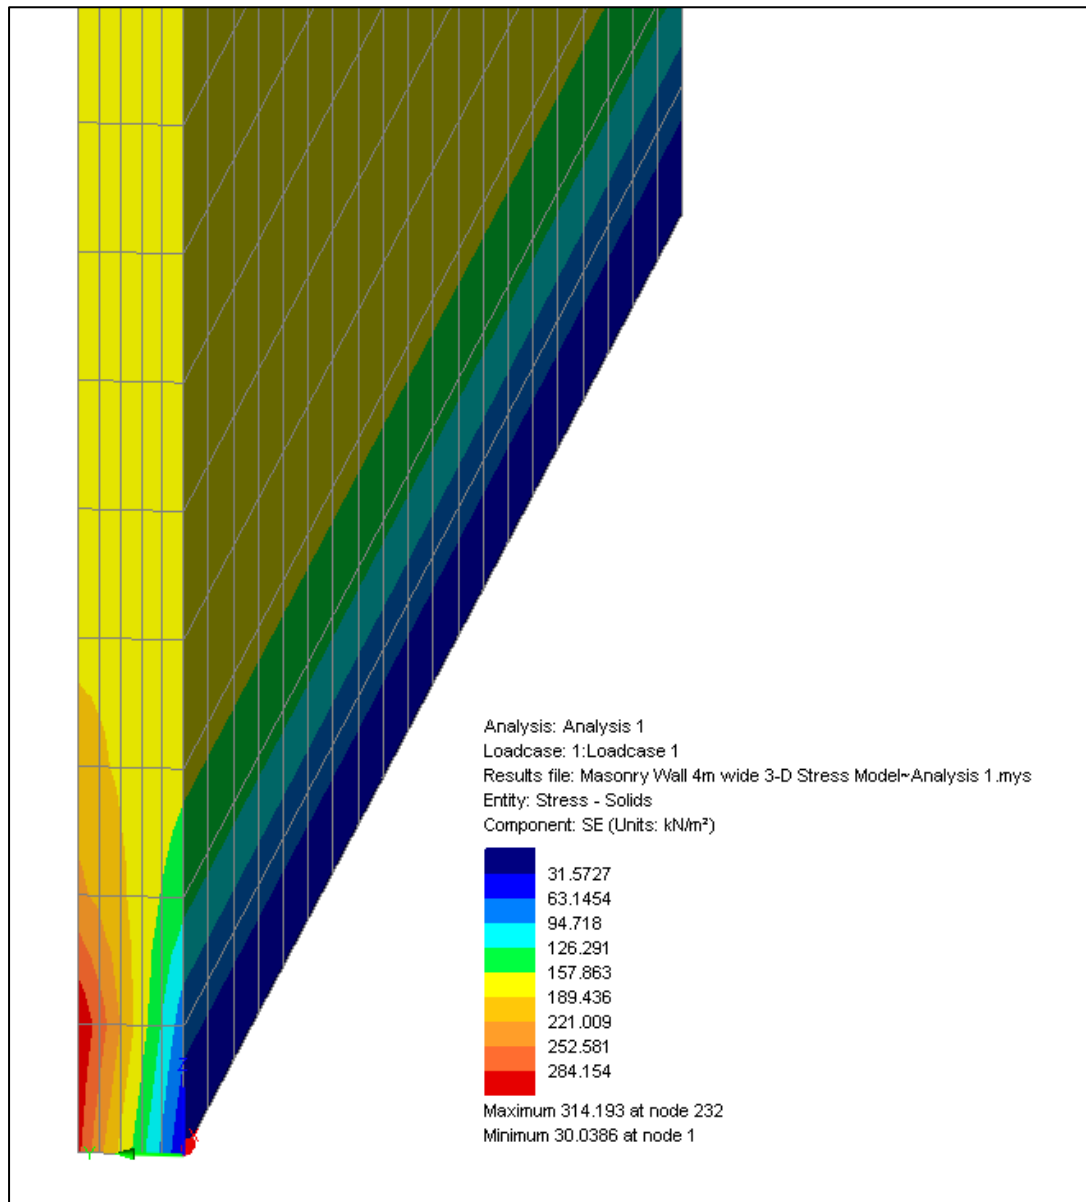

Appendix P - Flood water hazard matrix

Table 4 – Hazard to People Classification using Hazard Rating ($HR = d \times (v + 0.5) + DF$) for (Source Table 13.1 of FD2320/TR2 - Extended version)

HR	Depth of flooding - d (m)												
	DF = 0.5				DF = 1								
Velocity v (m/s)	0.05	0.10	0.20	0.25	0.30	0.40	0.50	0.60	0.80	1.00	1.50	2.00	2.50
0.0	0.03+0.5- = 0.53	0.05+0.5- = 0.55	0.10+0.5- = 0.60	0.13+0.5- = 0.63	0.15+1.0- = 1.15	0.20+1.0- = 1.20	0.25+1.0- = 1.25	0.30+1.0- = 1.30	0.40+1.0- = 1.40	0.50+1.0- = 1.50	0.75+1.0- = 1.75	1.00+1.0- = 2.00	1.25+1.0- = 2.25
0.1	0.03+0.5- = 0.53	0.06+0.5- = 0.56	0.12+0.5- = 0.62	0.15+0.5- = 0.65	0.18+1.0- = 1.18	0.24+1.0- = 1.24	0.30+1.0- = 1.30	0.36+1.0- = 1.36	0.48+1.0- = 1.48	0.60+1.0- = 1.60	0.90+1.0- = 1.90	1.20+1.0- = 2.20	1.50+1.0- = 2.55
0.3	0.04+0.5- = 0.54	0.08+0.5- = 0.58	0.15+0.5- = 0.65	0.19+0.5- = 0.69	0.23+1.0- = 1.23	0.30+1.0- = 1.30	0.38+1.0- = 1.38	0.45+1.0- = 1.45	0.60+1.0- = 1.60	0.75+1.0- = 1.75	1.13+1.0- = 2.13	1.50+1.0- = 2.50	1.88+1.0- = 2.88
0.5	0.05+0.5- = 0.55	0.10+0.5- = 0.60	0.20+0.5- = 0.70	0.25+0.5- = 0.75	0.30+1.0- = 1.30	0.40+1.0- = 1.40	0.50+1.0- = 1.50	0.60+1.0- = 1.60	0.80+1.0- = 1.80	1.00+1.0- = 2.00	1.50+1.0- = 2.50	2.00+1.0- = 3.00	2.50+1.0- = 3.50
1.0	0.08+0.5- = 0.58	0.15+0.5- = 0.65	0.30+0.5- = 0.80	0.38+0.5- = 0.88	0.45+1.0- = 1.45	0.60+1.0- = 1.60	0.75+1.0- = 1.75	0.90+1.0- = 1.90	1.20+1.0- = 2.20	1.50+1.0- = 2.50	2.25+1.0- = 3.25	3.00+1.0- = 4.00	3.75+1.0- = 4.75
1.5	0.10+0.5- = 0.60	0.20+0.5- = 0.70	0.40+0.5- = 0.90	0.50+0.5- = 1.00	0.60+1.0- = 1.60	0.80+1.0- = 1.80	1.00+1.0- = 2.00	1.20+1.0- = 2.20	1.60+1.0- = 2.60	2.00+1.0- = 3.00	3.00+1.0- = 4.00	4.00+1.0- = 5.00	5.00+1.0- = 6.00
2.0	0.13+0.5- = 0.63	0.25+0.5- = 0.75	0.50+0.5- = 1.00	0.63+0.5- = 1.13	0.75+1.0- = 1.75	1.00+1.0- = 2.00	1.25+1.0- = 2.25	1.50+1.0- = 2.50	2.00+1.0- = 3.00	3.50	4.75	6.00	7.25
2.5	0.15+0.5- = 0.65	0.30+0.5- = 0.80	0.60+0.5- = 1.10	0.75+0.5- = 1.25	0.90+1.0- = 1.90	1.20+1.0- = 2.20	1.50+1.0- = 2.50	1.80+1.0- = 2.80	3.40	4.00	5.50	7.00	8.50
3.0	0.18+0.5- = 0.68	0.35+0.5- = 0.85	0.70+0.5- = 1.20	0.88+0.5- = 1.38	1.05+1.0- = 2.05	1.40+1.0- = 2.40	1.75+1.0- = 2.75	3.10	3.80	4.50	6.25	8.00	9.75
3.5	0.20+0.5- = 0.70	0.40+0.5- = 0.90	0.80+0.5- = 1.30	1.00+0.5- = 1.50	1.20+1.0- = 2.20	1.60+1.0- = 2.60	3.00	3.40	4.20	5.00	7.00	9.00	11.00
4.0	0.23+0.5- = 0.73	0.45+0.5- = 0.95	0.90+0.5- = 1.40	1.13+0.5- = 1.63	1.35+1.0- = 2.35	1.80+1.0- = 2.80	3.25	3.70	4.60	5.50	7.75	10.00	12.25
4.5	0.25+0.5- = 0.75	0.50+0.5- = 1.00	1.00+0.5- = 1.50	1.25+0.5- = 1.75	1.50+1.0- = 2.50	2.00+1.0- = 3.00	3.50	4.00	5.00	6.00	8.50	11.00	13.50
5.0	0.28+0.5- = 0.78	0.60+0.5- = 1.10	1.10+0.5- = 1.60	1.38+0.5- = 1.88	1.65+1.0- = 2.65	3.20	3.75	4.30	5.40	6.50	9.25	12.00	14.75
Flood Hazard Rating (HR)	Colour Code	Hazard to People Classification											
Less than 0.75		Very low hazard - Caution											
0.75 to 1.25		Danger for some – includes children, the elderly and the infirm											
1.25 to 2.0		Danger for most – includes the general public											
More than 2.0		Danger for all – includes the emergency services											

(Suresh *et al.*, 2008)


Appendix Q - Hydrodynamic loading results

Drag coefficient	Hazard rating	Velocity component orthogonal to the wall panel (m/s)	Hydrodynamic load per unit length (kN/m)	Factor of hydrostatic load
2	1.3	0	0.000	0.000
2	1.36	0.1	1.177	0.667
2	1.45	0.3	10.595	5.999
2	1.6	0.5	29.430	16.665
2	1.9	1	117.720	66.659
2	2.2	1.5	264.870	149.983
2	2.5	2	470.880	266.636
2	2.8	2.5	735.750	416.619
2	3.1	3	1059.480	599.932
2	3.4	3.5	1442.070	816.574
2	3.7	4	1883.520	1066.546
2	4	4.5	2383.830	1349.847
2	4.3	5	2943.000	1666.478
2.3	1.3	0	0.000	0.000
2.3	1.36	0.1	1.354	0.767
2.3	1.45	0.3	12.184	6.899
2.3	1.6	0.5	33.845	19.164
2.3	1.9	1	135.378	76.658
2.3	2.2	1.5	304.601	172.480
2.3	2.5	2	541.512	306.632
2.3	2.8	2.5	846.113	479.112
2.3	3.1	3	1218.402	689.922
2.3	3.4	3.5	1658.381	939.060
2.3	3.7	4	2166.048	1226.528
2.3	4	4.5	2741.405	1552.324
2.3	4.3	5	3384.450	1916.450

Appendix R - Maximum bending moment for varying velocities orthogonal to the wall panel calculations

<p>MARINE SCIENCE & ENGINEERING WITH PLYMOUTH UNIVERSITY School of Marine Science & Engineering</p>	Job N°	Section	Sheet N°	Rev
	Engineer	SK	Checked	
	Date	1/12/15	Rev. Date	
<p>Project: Dissertation - PRCF 507 Project 2</p>				
<p>Element: Hydrodynamic load field line analysis calculations</p>				
<p>0 m/s: $M_p = 0.219 \text{ kNm/m}$</p> <p>0.3 m/s: A factor of the increase in loading on the panel in comparison to hydrostatic loading, calculated as: $12.184 \div 1.766 = 6.899$</p> <p style="margin-left: 40px;"> $\left(\begin{array}{c} \text{hydrodynamic load per} \\ \text{meter of exposed length} \end{array} \right) \left(\begin{array}{c} \text{hydrostatic load per} \\ \text{meter of exposed length} \end{array} \right)$ </p> <p>$\therefore M_p = 0.219 \times 6.899 = 1.511 \text{ kNm/m}$</p> <p>1.0 m/s: Factor = $135.378 \div 1.766 = 76.658$</p> <p>$\therefore M_p = 0.219 \times 76.658 = 16.788 \text{ kNm/m}$</p> <p>2.0 m/s: Factor = $541.512 \div 1.766 = 306.632$</p> <p>$\therefore M_p = 0.219 \times 306.632 = 67.152 \text{ kNm/m}$</p> <p>3.0 m/s: Factor = $1218.402 \div 1.766 = 689.922$</p> <p>$\therefore M_p = 0.219 \times 689.922 = 151.093 \text{ kNm/m}$</p>				

Appendix S - Velocity component orthogonal to the wall panel versus maximum bending moment for slower velocities observed

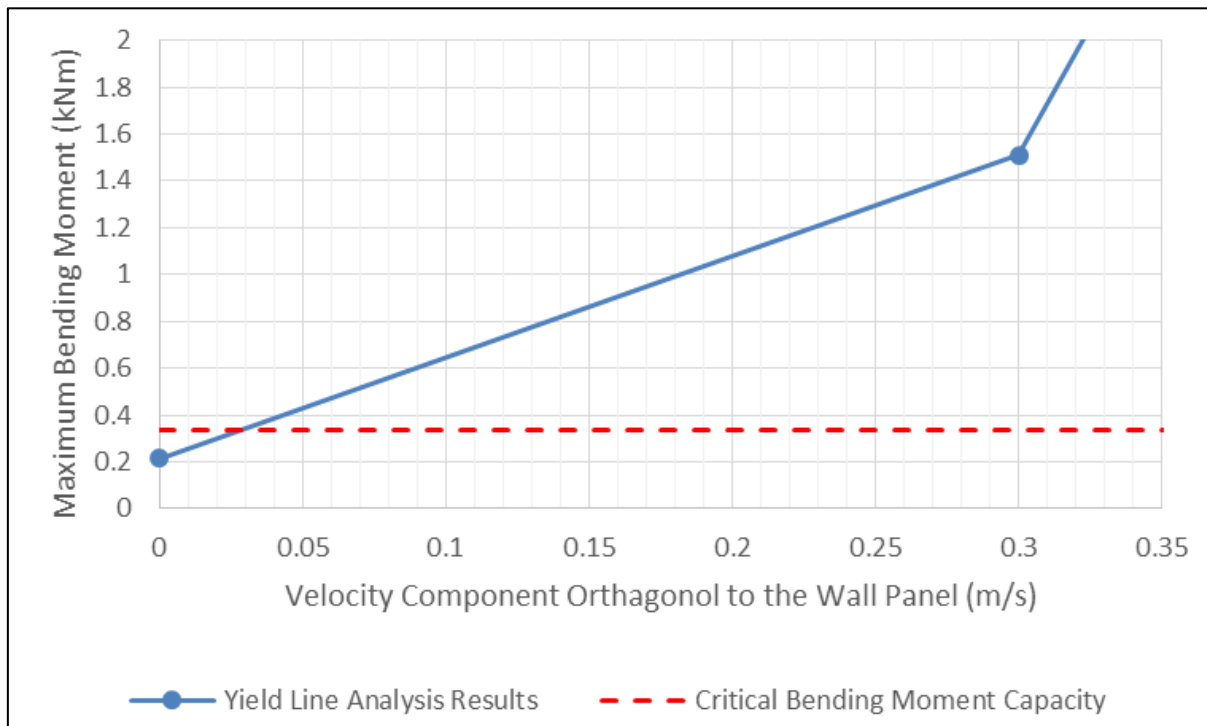

Appendix T - Check sheet to assist in determining whether a protection height of 0.6 meters is appropriate for a wall panel

	Yes	No
Section modulus less than that from inner and outer leafs 100 mm thick ($3.333 \times 10^6 \text{ mm}^3$)?		
Notable velocity of flood water in previous events?		
Presence of large opening for large sliding doors (or similar)?		
Walls in a less than fair condition upon visual inspection?		
Total:		