

2023-08-02

Quality assessment of life cycle inventory data for composites

Moutik, B

<https://pearl.plymouth.ac.uk/handle/10026.1/21162>

All content in PEARL is protected by copyright law. Author manuscripts are made available in accordance with publisher policies. Please cite only the published version using the details provided on the item record or document. In the absence of an open licence (e.g. Creative Commons), permissions for further reuse of content should be sought from the publisher or author.



Quality assessment of life cycle inventory data for Composites



Badr Moutik

John Summerscales, Jasper Graham-Jones, and Richard Pemberton



**UNIVERSITY OF
PLYMOUTH**




Background




Data quality assessment?

Potential for misleading composites LCA results and inaccurate conclusions/interpretations

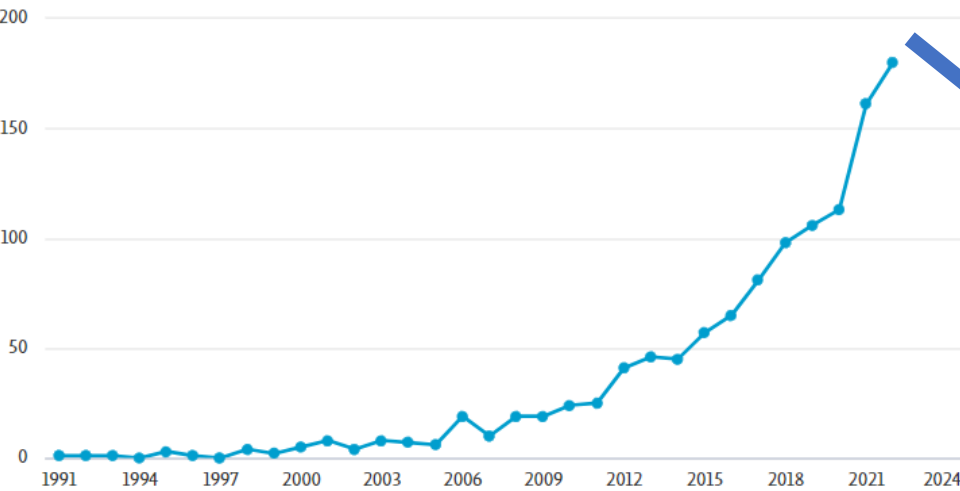

Total: 1160 documents

MARINESHIFT360

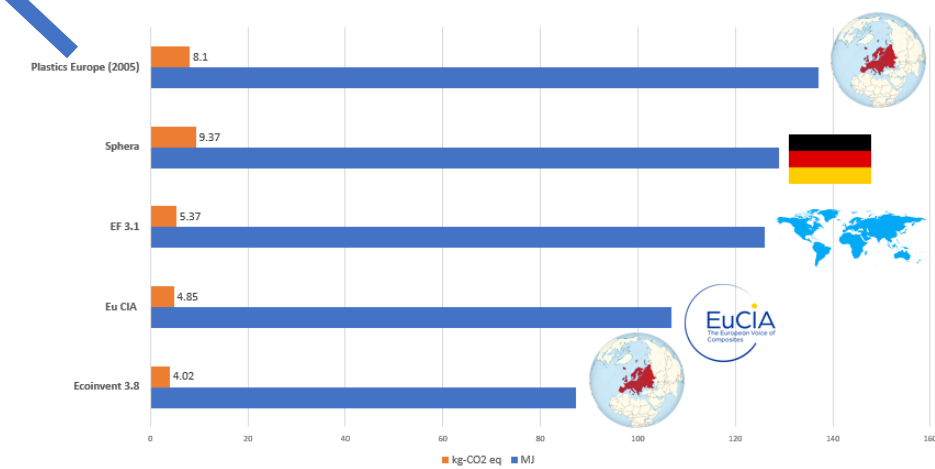




Aim


- To conduct a data quality assessment of key composite materials life cycle inventory “LCI” datasets
- To identify opportunities for enhancing the data quality of composites materials LCI datasets

Part of ongoing Ph.D. research: Life Cycle Assessment of Luxury Yacht Manufacture

Methodology

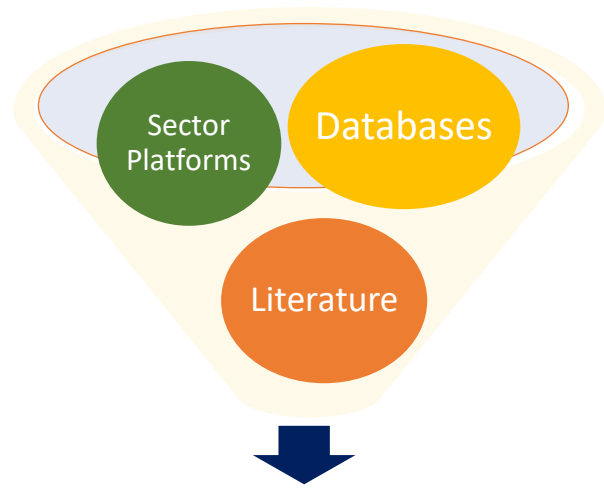


**Composites Materials
LCA Data Collection**

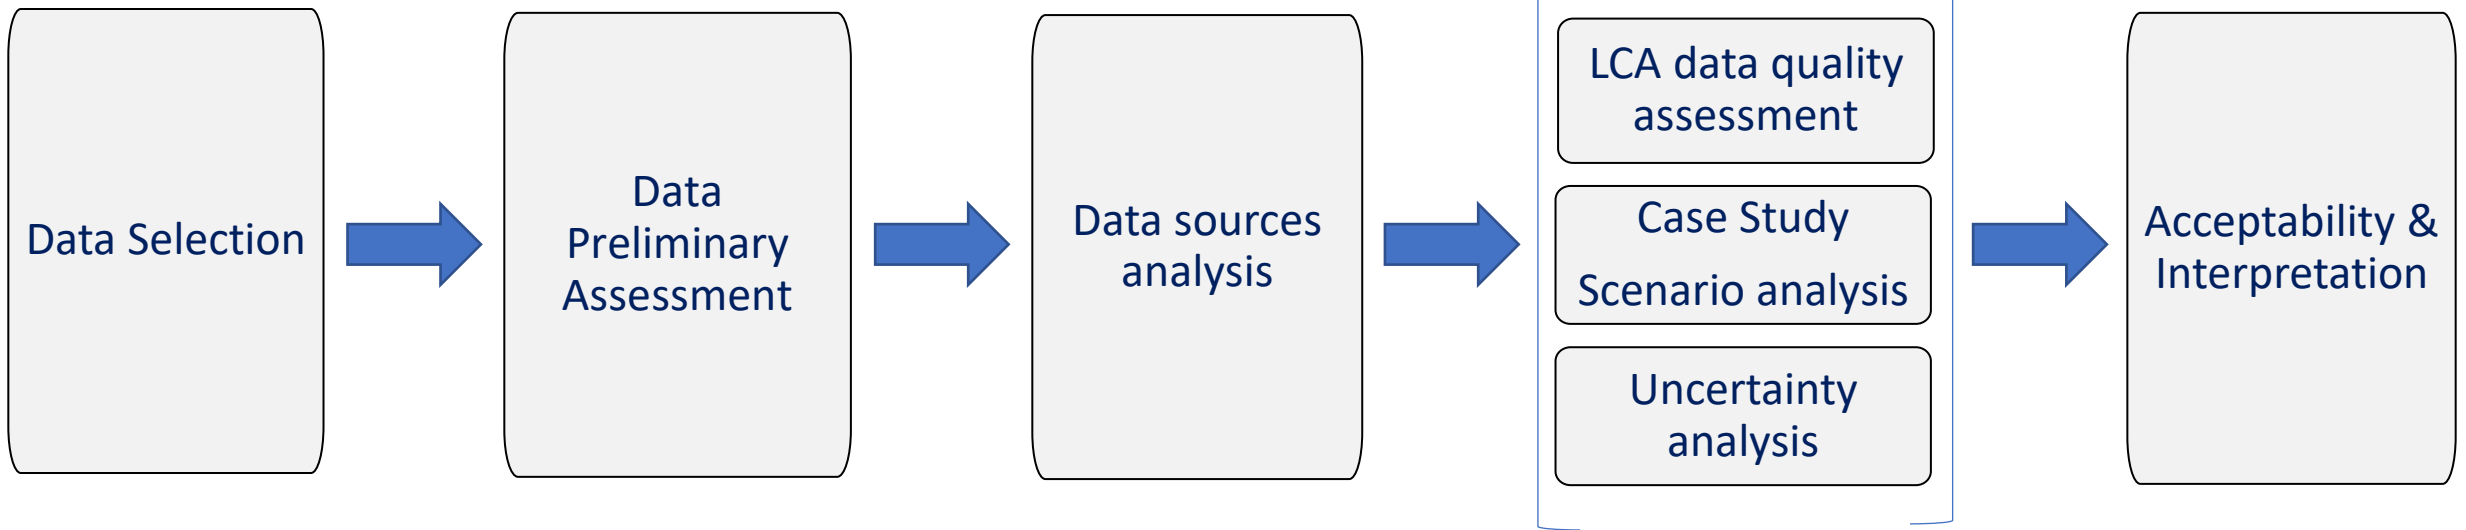

LCA is the “compilation and evaluation of the inputs, outputs and the potential environmental impacts of a product system throughout its life cycle” (ISO,2006)

The data you need to make an LCA.

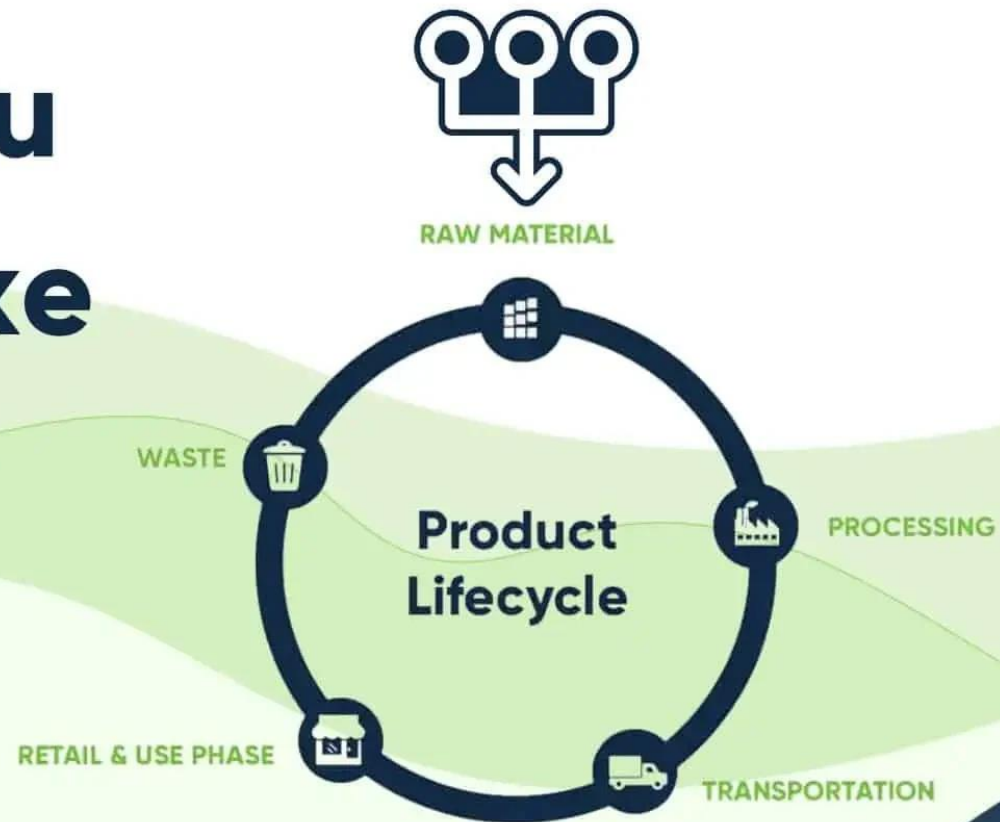

Data Quality in LCA



ISO 14040/44:2006

“the characteristics of data that relate to their ability to satisfy **stated requirements**”

“**Data Quality requirements** shall be specified to enable the **goal** and **scope** of the LCA to be **met**”

LCA Data Quality Requirements

“where a study is intended to be used in comparative assertions intended to be disclosed to the public, the [following] data quality requirements” shall be addressed, (ISO,2006)



Data Quality in LCA: open interpretation?

Flexibility in determining the approach for addressing DQA-specific areas



It does not specify to which component, or level, data quality analysis should be applied



Main methodologies for LCI data quality assessment (DQA)



ISO 14040/44:2006

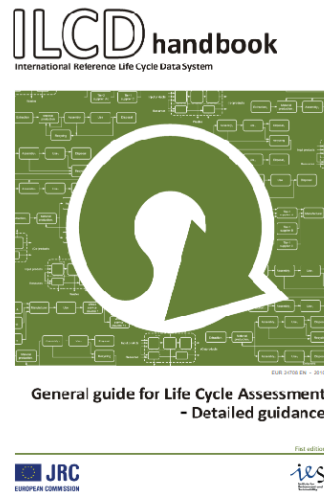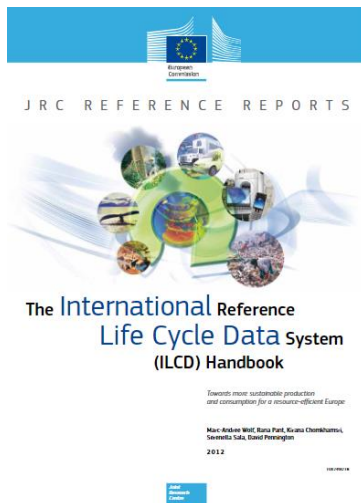

U.S Life Cycle Inventory Database

Pedigree matrix

Indicator score	1	2	3	4	5 (default)
Reliability	Verified data based on measurements ¹	Verified data partly based on assumptions or non-verified data based on measurements	Non-verified data partly based on qualified estimates	Qualified estimate (e.g. by industrial expert)	Non-qualified estimate
Completeness	Representative data from all sites relevant for the market considered, over an adequate period to even out normal fluctuations	Representative data from >50% of the sites considered, over an adequate period to even out normal fluctuations	Representative data from only some sites relevant for the market considered or <50% of sites but from shorter periods	Representative data from only one site relevant for the market considered or some sites but from shorter periods	Representativeness unknown or data from a small number of sites and from shorter periods
Temporal correlation	Less than 3 years of difference to the time period of the dataset	Less than 6 years of difference to the time period of the dataset	Less than 10 years of difference to the time period of the dataset	Less than 15 years of difference to the time period of the dataset	Age of data unknown or more than 15 years of difference to the time period of the dataset
Geographical correlation	Data from area under study	Average data from larger areas in which the area under study is included	Data from areas with slightly similar production conditions	Data from areas with slightly similar production conditions	Data from unknown or distinctly different areas (North America instead of Middle East, OECD Europe instead of Russia)
Further technological correlation	Data from enterprises, processes and materials under study	Data from processes and materials under study (i.e. identical technology) but from different enterprises	Data from processes and materials under study but from different technology	Data on related processes or materials	Data on related processes on laboratory scale or from different technology

Major LCI data sources

softwares

SimaPro

openLca



thinkstep
GaBi

databases

ei ecoinvent

 **JRC**
EUROPEAN COMMISSION

FEDERAL
LOA
COMMONS


 **sphera**[®]

sector platforms


Eco Impact
Calculator
By EuCIA

MARINESHIFT360


literature




literature

Fiber Reinforced Composite Materials

Fiber Reinforced Composite Materials

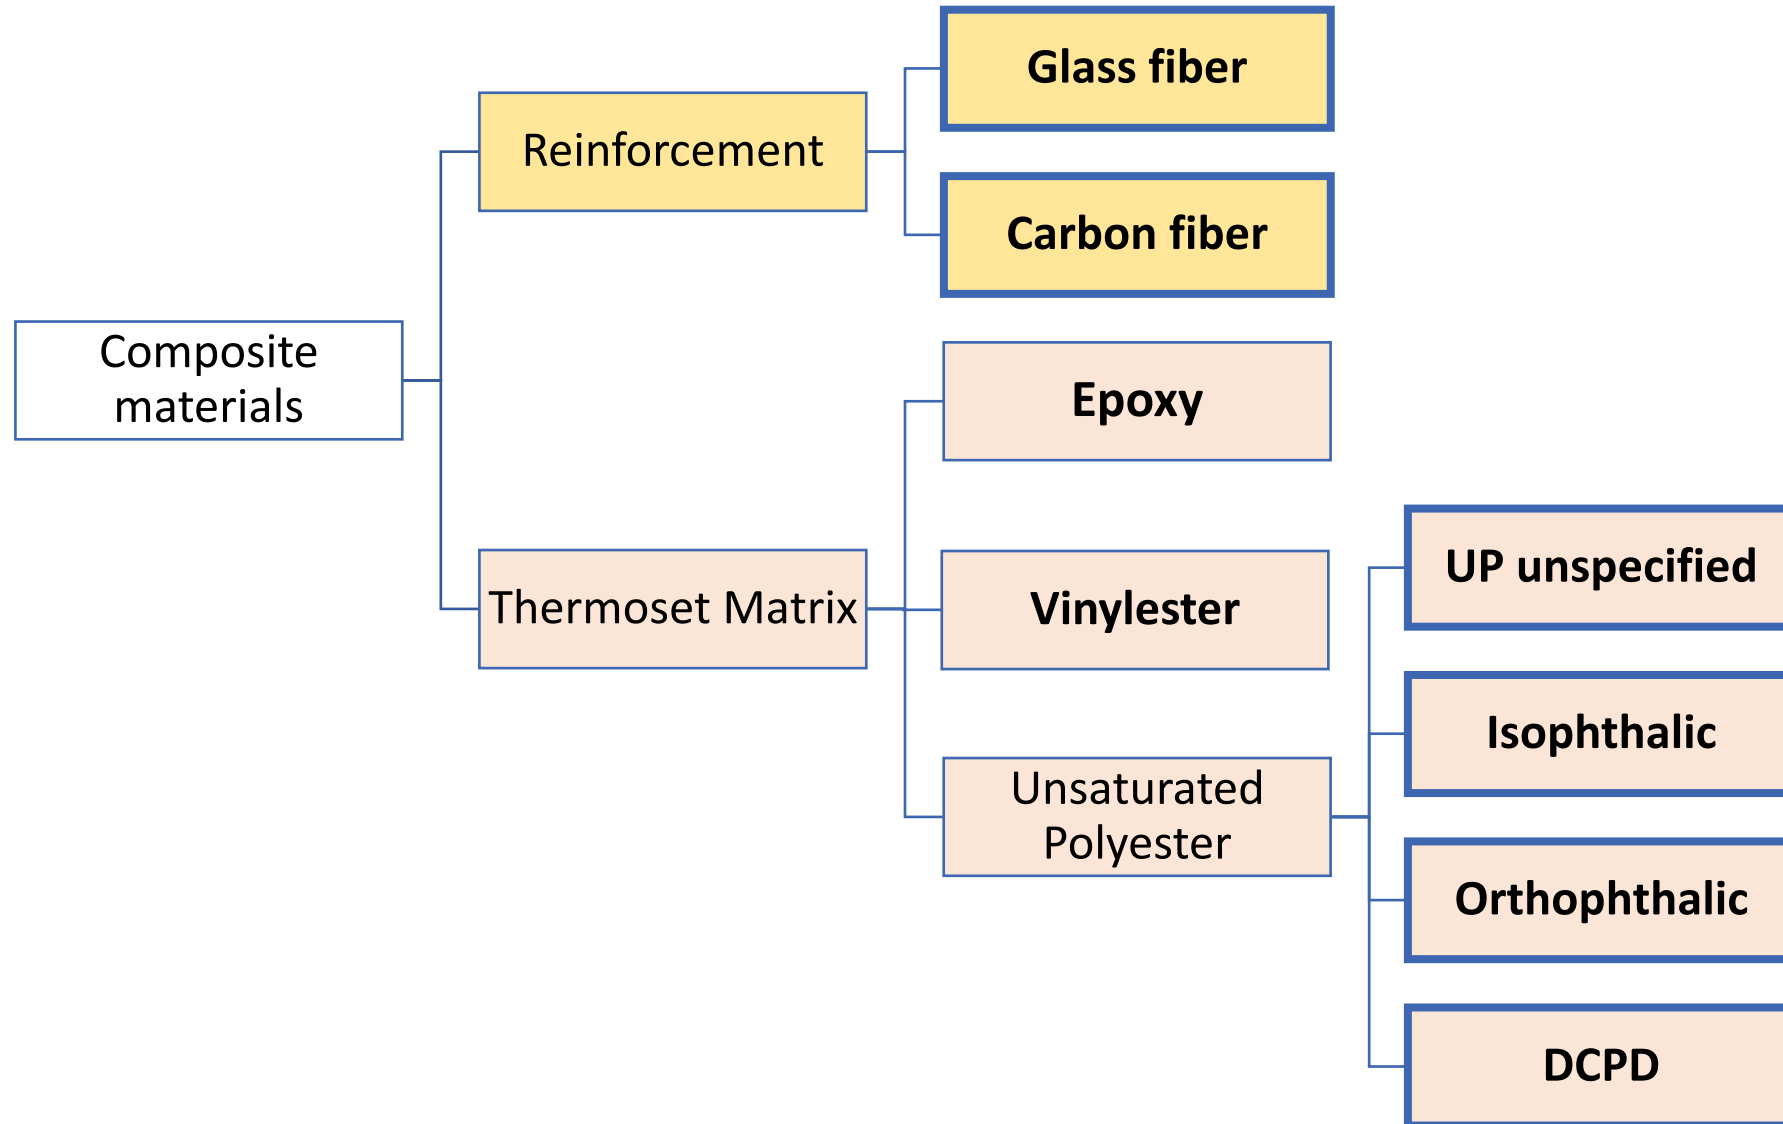

Unsaturated polyester resin formulation

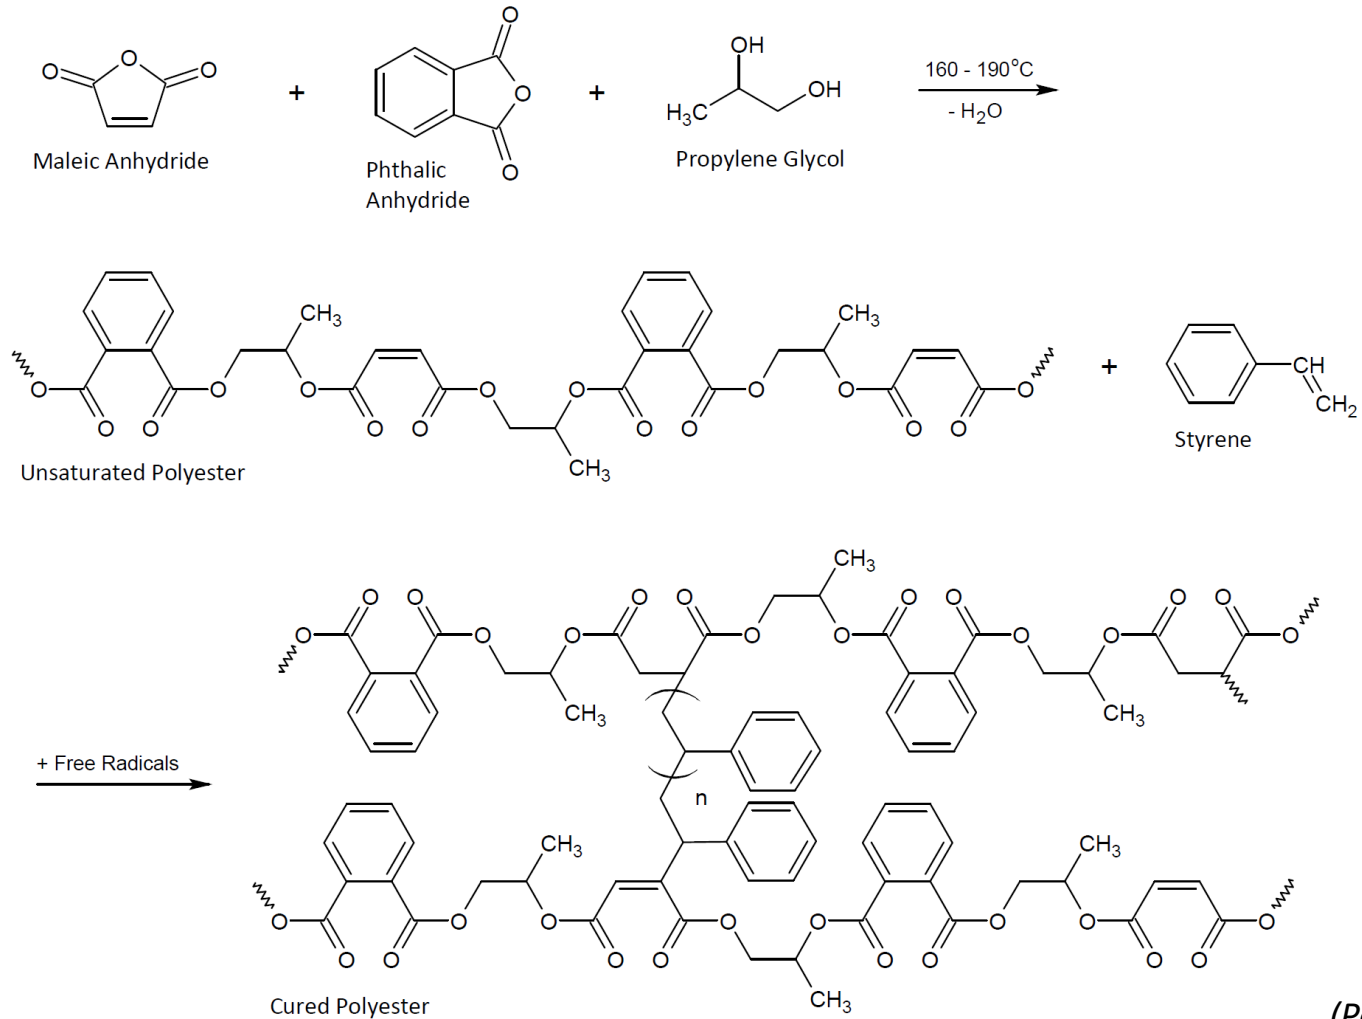

(Polymerdatabase, 2022)

Unsaturated polyester resin process data set



Ecoinvent/MS360
acetic anhydride
adipic acid
chemical factory, organics
electricity, medium voltage
ethylene glycol
heat, district or industrial, natural gas
heat, district or industrial, other than natural gas
phthalic anhydride
propylene glycol, liquid
Water, cooling, unspecified natural origin
Water, unspecified natural origin

Sphera
Electricity grid mix
Thermal energy from natural gas
Propylene glycol
Maleic anhydride (MA) (from n-butane)
Phthalic anhydride (by oxidation of xylene)
Styrene (ESBM dehydrogenation)
Nitrogen (gaseous)
Water (desalinated; deionised)
Catalyst


Eu Cia
Dicyclopentadiene based unsaturated polyester resin
Isophthalic acid based unsaturated polyester resin
Orthophthalic acid based unsaturated polyester resin
Maleic unsaturated polyester resin production

USLCI
Diesel, combusted in industrial equipment - RNA
Disposal, solid waste, unspecified, to municipal incineration
Disposal, solid waste, unspecified, to sanitary landfill
Disposal, solid waste, unspecified, to waste-to-energy
Electricity, at grid - RNA
Ethylene glycol, at plant, kg
Ethylene glycol, at plant, kg
Ethylene, at plant, kg
Maleic anhydride, at plant
Natural gas, combusted in industrial boiler - RNA
Neo pentyl glycol, at plant
Petroleum coke, at refinery - RNA
Phthalic anhydride, at plant
Polyethylene terephthalate, PET, virgin resin, at plant, kg
Propylene Glycol, liquid, at plant
Propylene Glycol, liquid, at plant
Purified terephthalic acid, PTA, at plant, kg
Purified terephthalic acid, PTA, at plant, kg
Styrene, at plant - RNA
Tetrabromophthalic acid, at plant
Transport, combination truck, diesel powered - RNA
Transport, train, diesel powered - RNA
Water

UP resin unspecified (per kg)

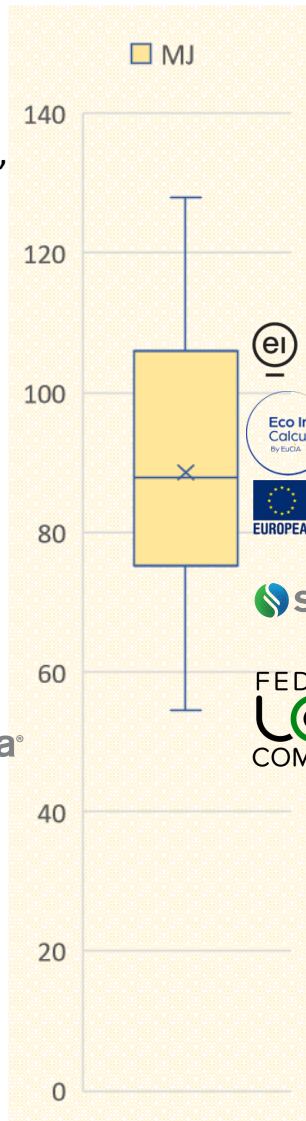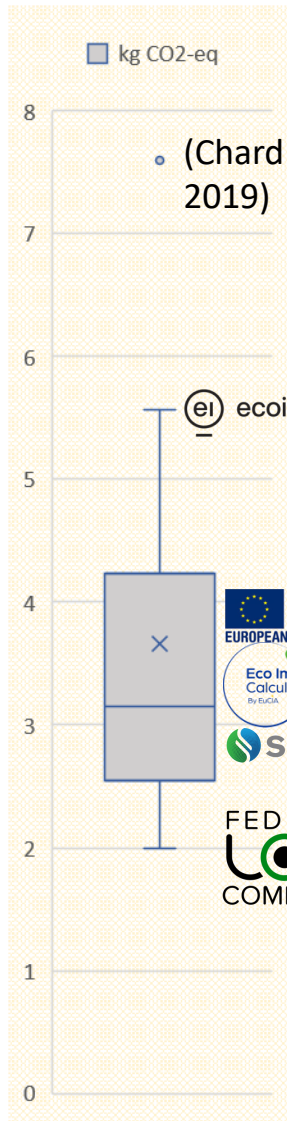

73 MJ is the average energy consumed by an electric car in about two and half days ~ 100 km



73 MJ is the energy consumed by an average household for a two and half days



Data variation of 74 MJ for 1 kg of UP resin



HOW FAR CAN I GO?

EFFICIENCY RANK




1°	HYUNDAI KONA	13,1 kWh / 100 km	
2°	RENAULT ZOE R110	13,7 kWh / 100 km	
3°	SMART EQ FORTWO	15,1 kWh / 100 km	
4°	NISSAN LEAF	18,9 kWh / 100 km	
5°	TESLA MODEL S	19,5 kWh / 100 km	
6°	JAGUAR I-PACE	23,9 kWh / 100 km	

DQA: Unsaturated Polyester Resin Unspecified


Data time reference

ILCD



Pedigree matrix/US EPA process

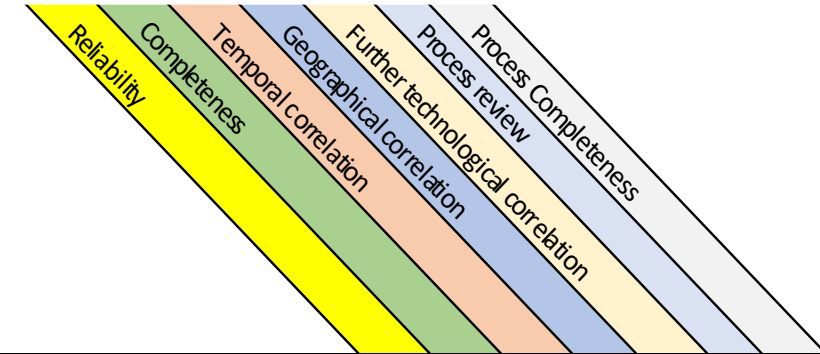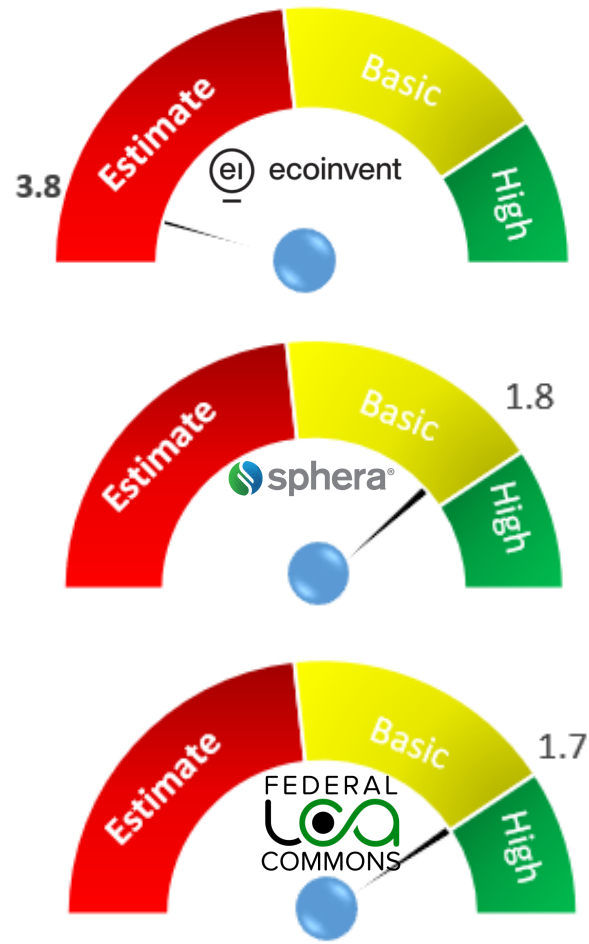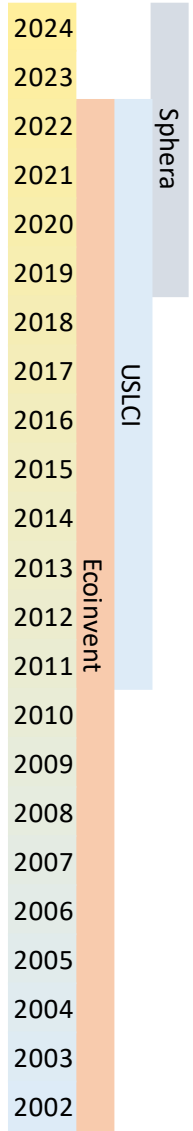

Original Document	Databases/Platforms	Data quality index							
		Pedigree						US EPA	
Life cycle inventories of chemicals	Ecoinvent/MS360	3.5	5	5	2	3.4	4	5	5
Life Cycle Inventory of Polymer Composites	USLCI	1	2	1	1	1	2	2	2
DE: Polyester Resin Unsaturated (UP)	Sphera	2	3	2	2	1	2	5	5
Background report V2.0	Eu Cia	4	5	5	5	5	4	5	5




Orthophthalic acid/Isophthalic acid/DCPD/Maleic UP Resin - BPA epoxy-based vinyl ester resin (per kg)

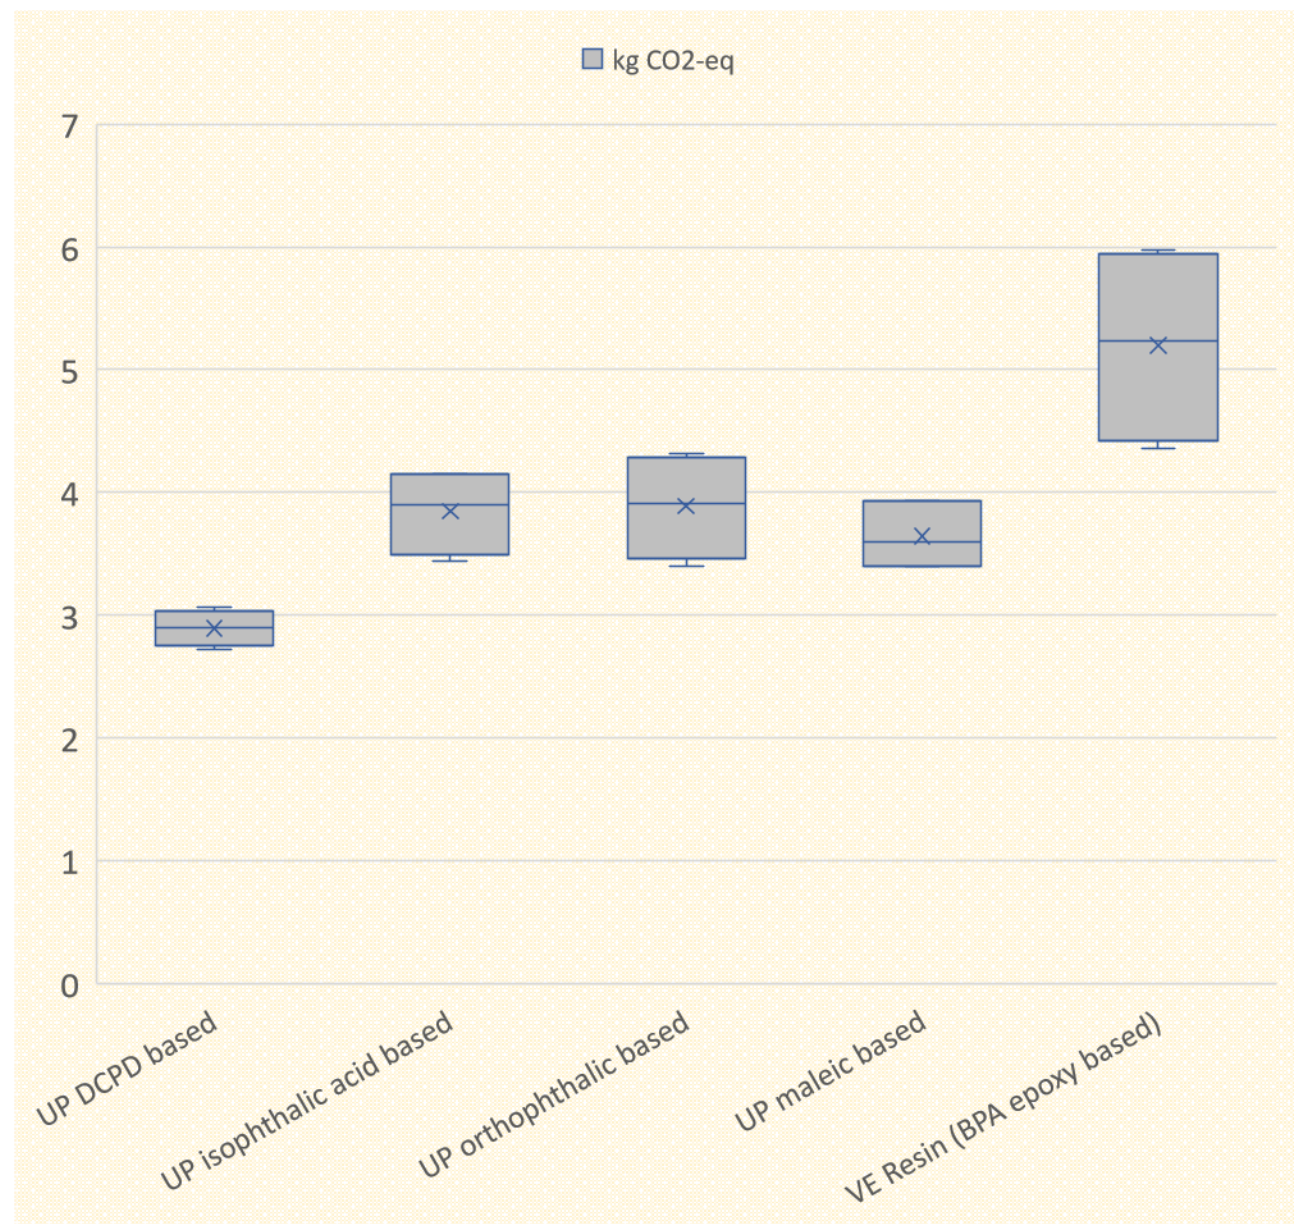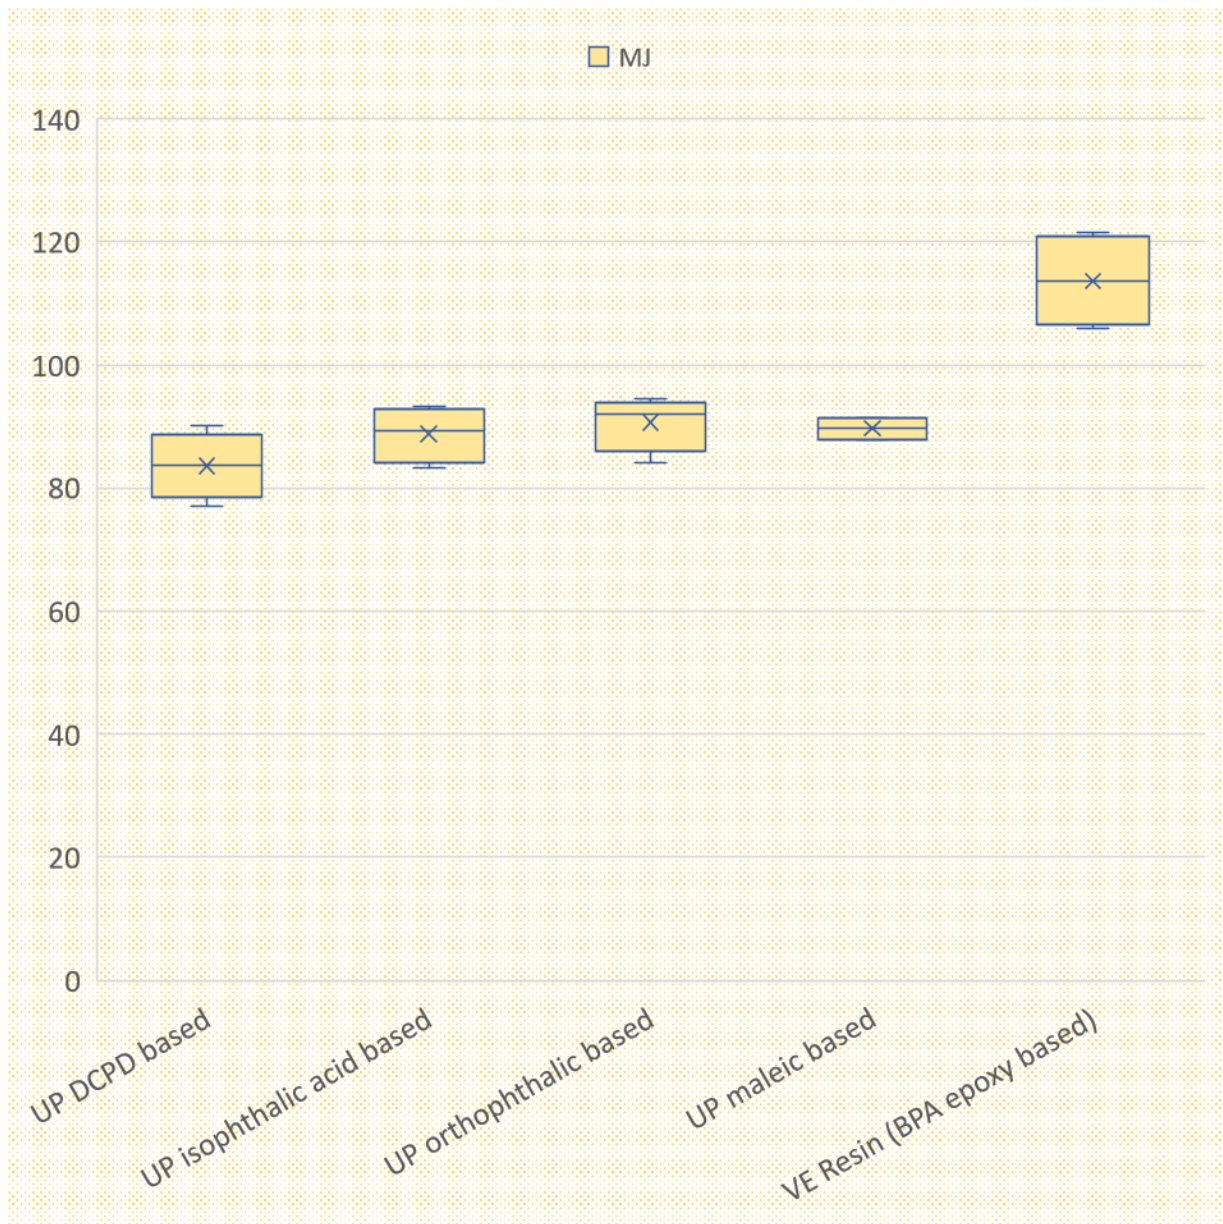


DQA: Orthophtalic acid based - Isophtalic acid based - DCPD based - Maleic - BPA epoxy based vinyl ester resin

Main common source:

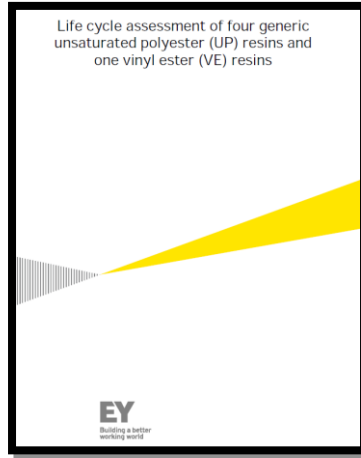

Pedigree matrix/US EPA process

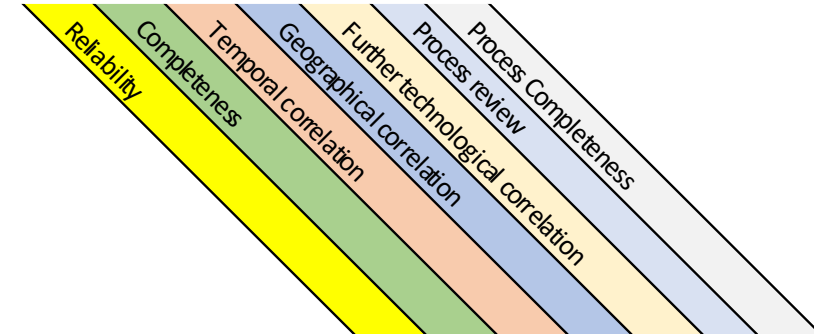


Data time reference




ILCD



Original Document	Databases/Platforms	Data quality index						
		Pedigree					US EPA	
Orthophtalic acid based UP resin (Rietveld and Hegger (2014))	Ecoinvent/MS360/ Eu Cia	1.3	3.2	2.3	1.1	1.4	4	5
Isophtalic acid based UP resin (Rietveld and Hegger (2014))		1.3	3.2	2.3	1.1	1.4	4	5
DCPD based UP resin (Rietveld and Hegger (2014))		1.3	3.2	2.3	1.1	1.4	4	5
Maleic UP resin (Rietveld and Hegger (2014))		1.3	3.2	2.3	1.1	1.4	4	5
BPA epoxy based vinyl ester resin (Rietveld and Hegger (2014))		1.3	3.2	2.3	1.1	1.4	4	5



Epoxy resin formulation

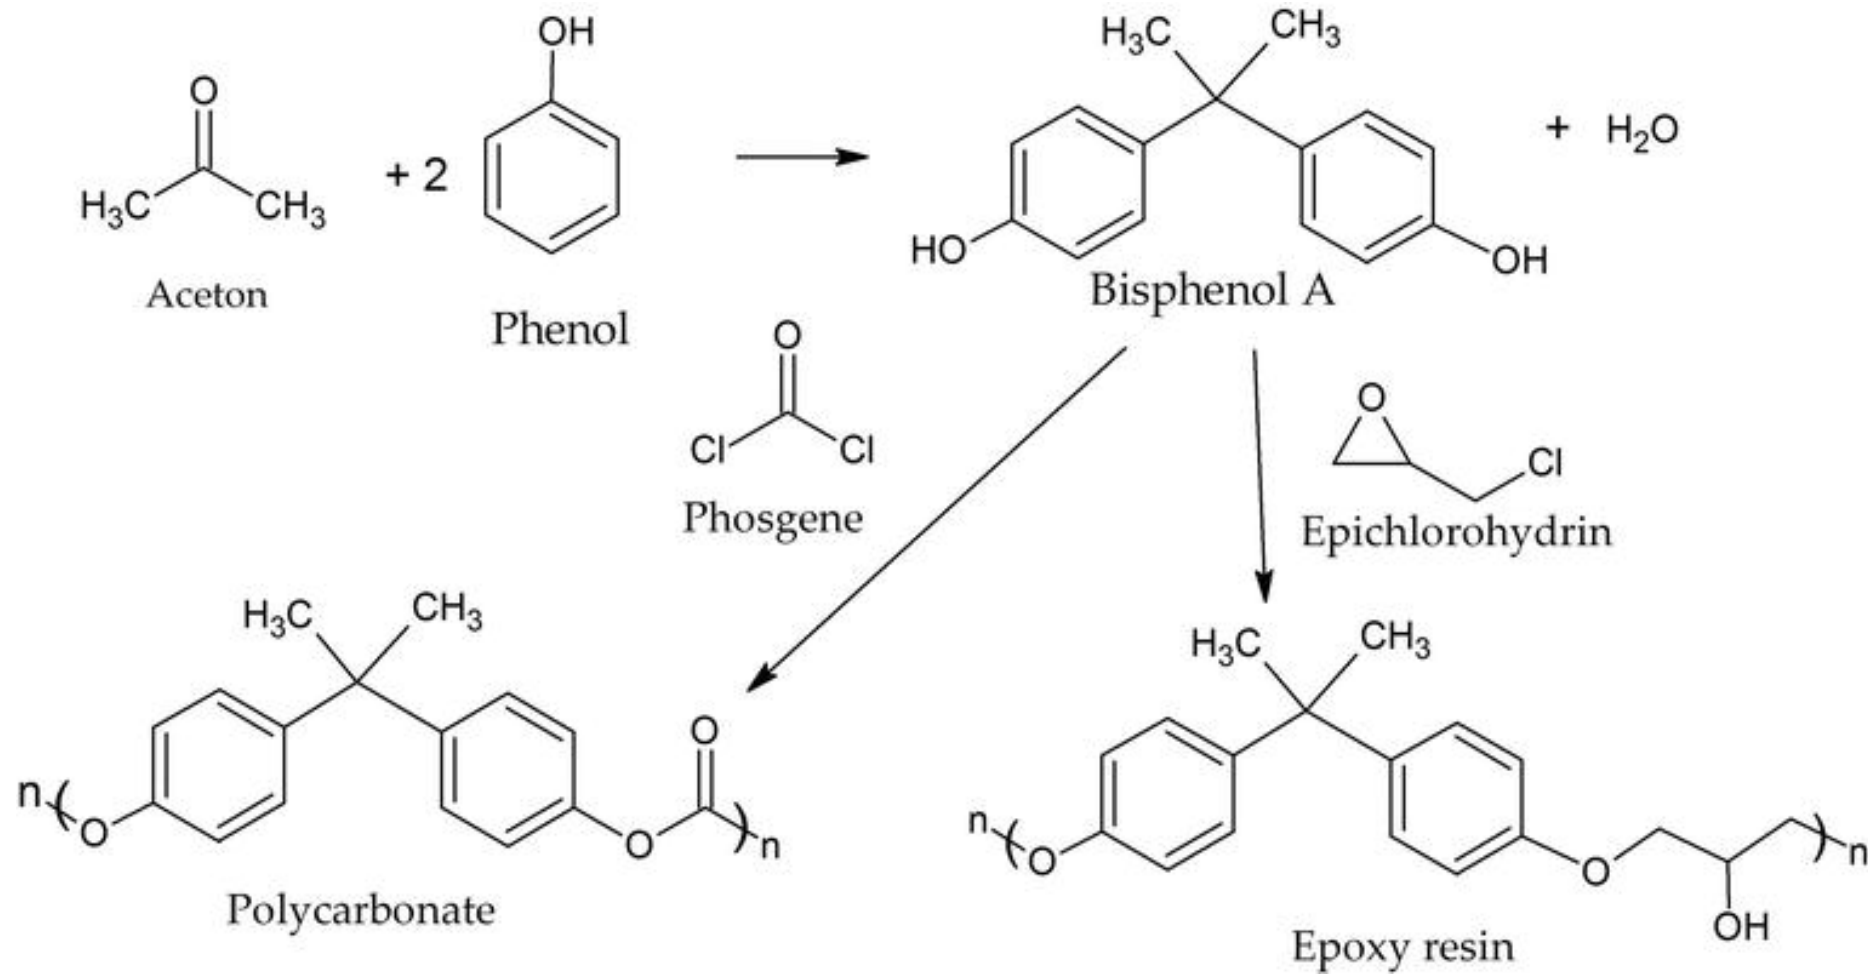

Epoxy resin process data set

Ecoinvent 3.9/Eu Cia

bisphenol A, powder
chemical factory, organics
electricity, medium voltage
epichlorohydrin
heat, district or industrial, natural gas
heat, from steam, in chemical industry
nitrogen, liquid
sodium hydroxide, without water, in 50% solution state
tap water
wastewater, average
wastewater, average

Sphera DE

Electricity grid mix
Water (desalinated; deionised)
Epichlorohydrin (by product calcium chloride, hydrochloric acid)
Bisphenol A
Isopropanol
Hydrochloric acid (100%) by-product epichlorohydrine, calcium chloride
Nitrogen (gaseous)
Sodium hydroxide (caustic soda) mix (100%)
Catalyst
Hazardous waste (non-specific) (C rich, worst case scenario incl. landfill)

Sphera RER/Plastics Europe


Diesel, combusted in industrial equipment - RNA
Bisphenol A by (phenol) (Acetone)
Epichlorohydrin by (allyl chloride) production
Natural Gas Production
Crude Oil production
Solvent
Sodium hydroxide

Ecoinvent 3.5


bisphenol A, powder
chemical factory, organics
electricity, medium voltage
epichlorohydrin
heat, district or industrial, natural gas
heat, from steam, in chemical industry
nitrogen, liquid
sodium hydroxide, without water, in 50% solution state
tap water
wastewater, average
wastewater, average

Epoxy resin (per kg)

A range of
64 MJ




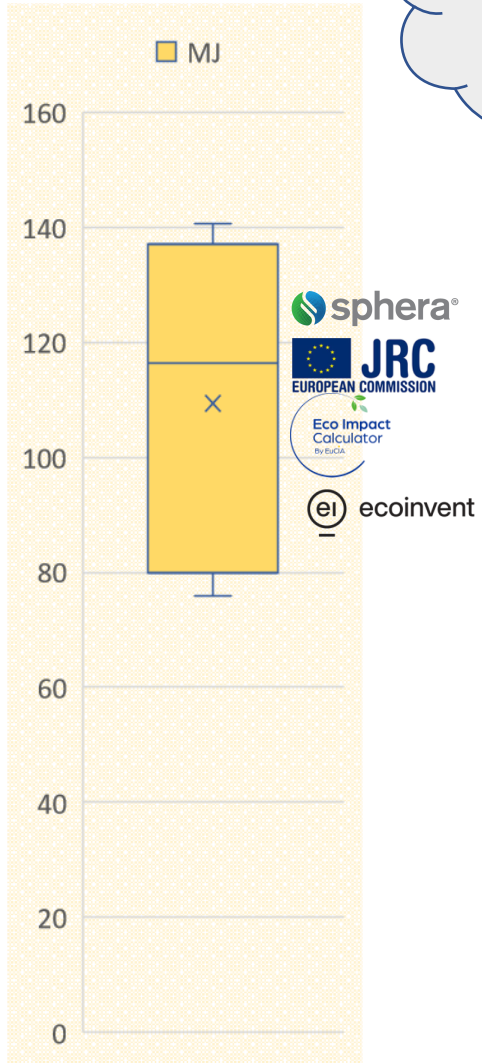


A range of
7.13 kg CO2 eq

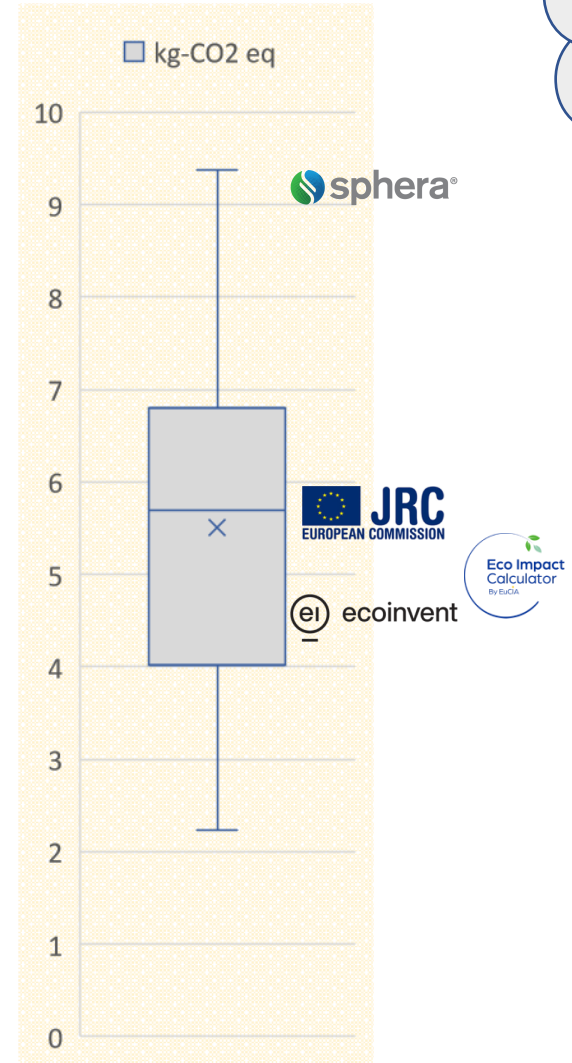

DQA: Epoxy Resin


Data time reference

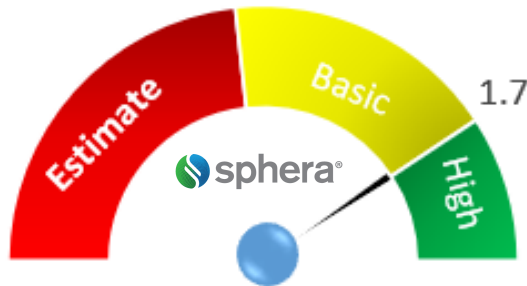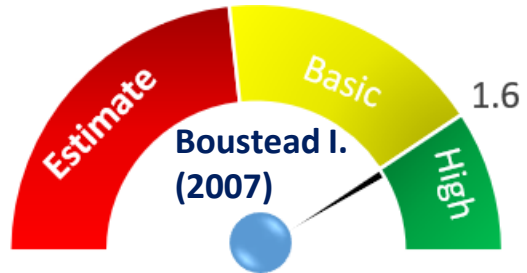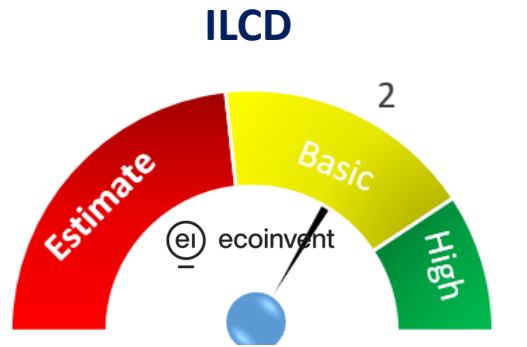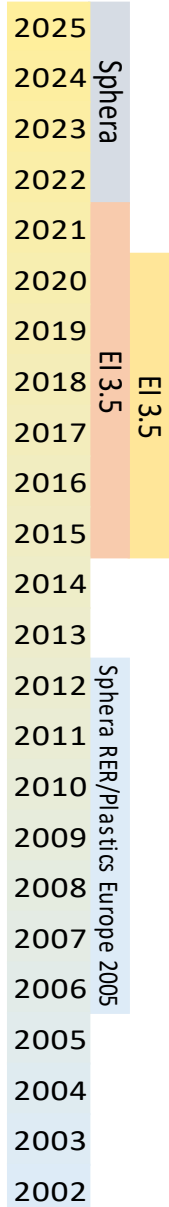


Main common source:



Pedigree matrix/US EPA process

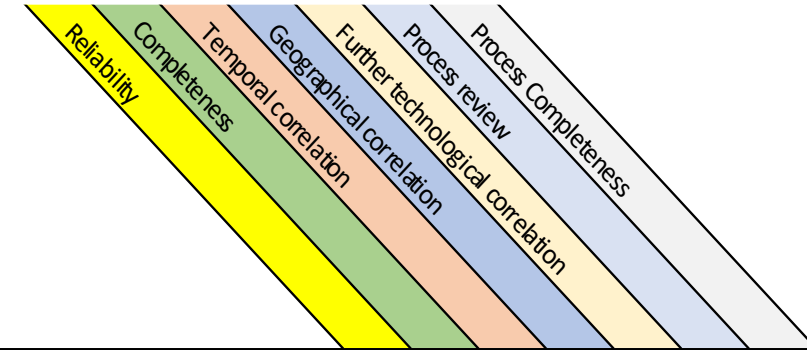

Original Document	Databases/Platforms	Data quality index						
		Pedigree					US EPA	
Epoxy resin production - RER (obsolete)	Ecoinvent 3.5	2	3	2	2	3	4	5
Epoxy resin production, liquid - RER	Ecoinvent 3.9	2	3	2	2	3	4	5
LIQUID EPOXY RESINS by I Boustead. 2007/PlasticsEurope	Sphera/Ecoinvent	1	3	2	1	1	2	2
Epoxy resin production, liquid - DE/Sphera	Sphera	2	3	2	1	2	2	1



Glass fiber input process data set

Ecoinvent 9.5
Aluminium oxide
Boric acid, anhydrous, power
Chemical, organic
Clay
Flat glass factory
Fluorspar
Lime
Lubricating oil
Nylon 6
Silica Sand
Silicone product
Tap water
Electricity
Heat, natural gas



USLCI
Boric acid
Calcium borates
Clay
Electricity
Epoxy resin
Ethylene glycol
Limestone
Liquefied petroleum gas
Natural gas, in boiler
Quicklime
Residual fuel oil
Silicone dioxide
Soda power
Transport combination truck
Transport
Water

Sphera
Quartz sand
Colemanite
Clay
Fluorspar
Limestone flour
Phenolic resin
Dolomite
Electricity
Natural gas
Lubricants at refinery
Kaolin






GFE
Silica sand
Kaolin
Limestone
Dolomite
Electricity
Natural gas
Chemicals

Glass fiber composites (per kg)


A range of
60.2 MJ

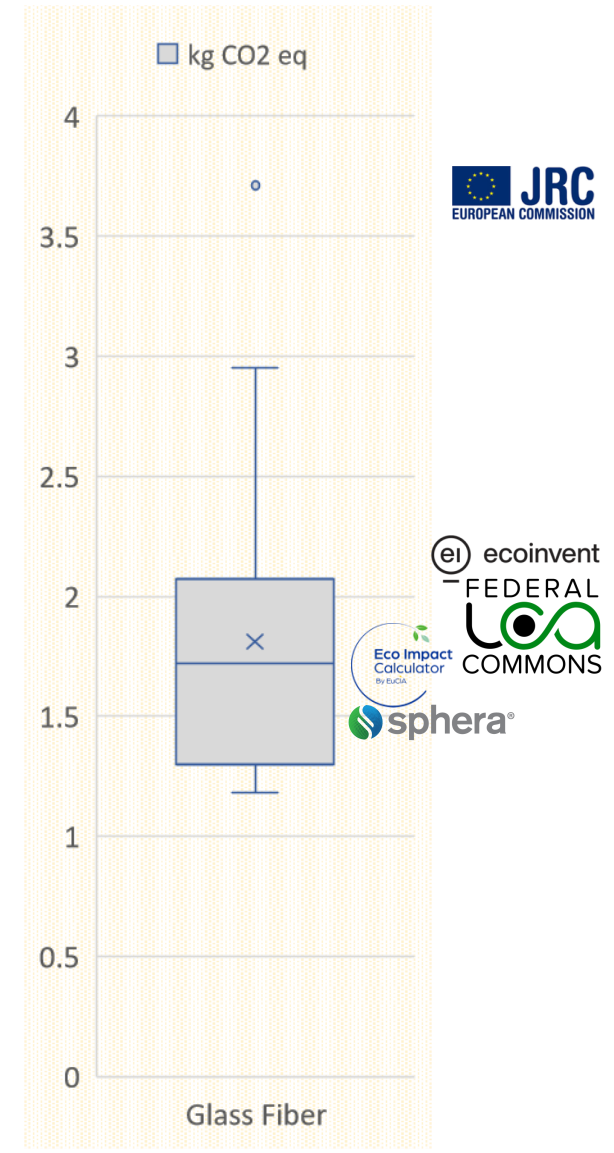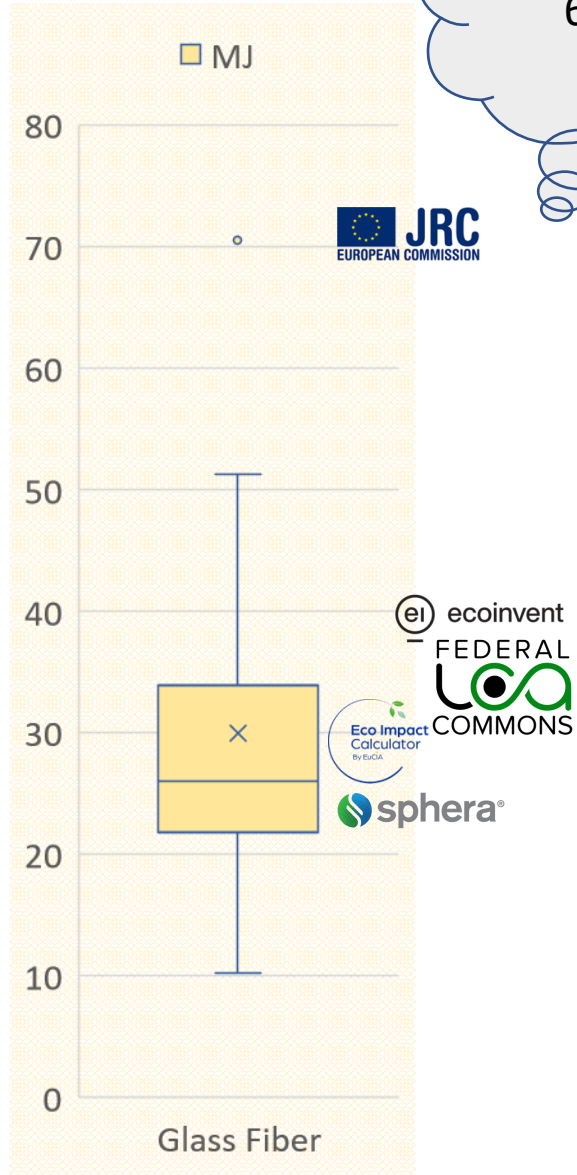

DQA: Glass fiber

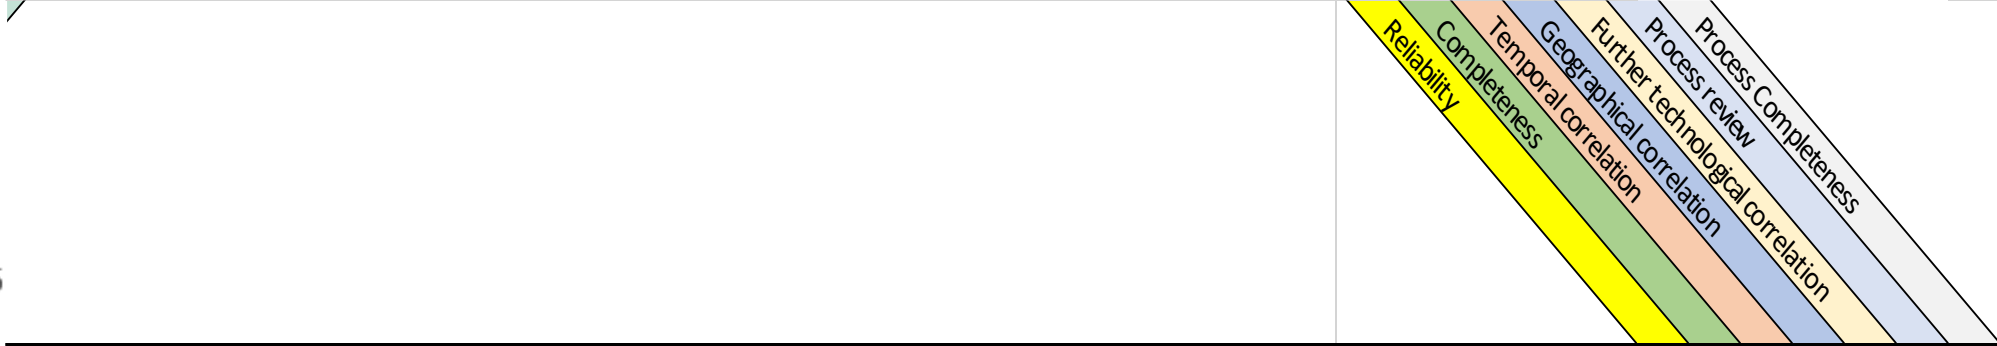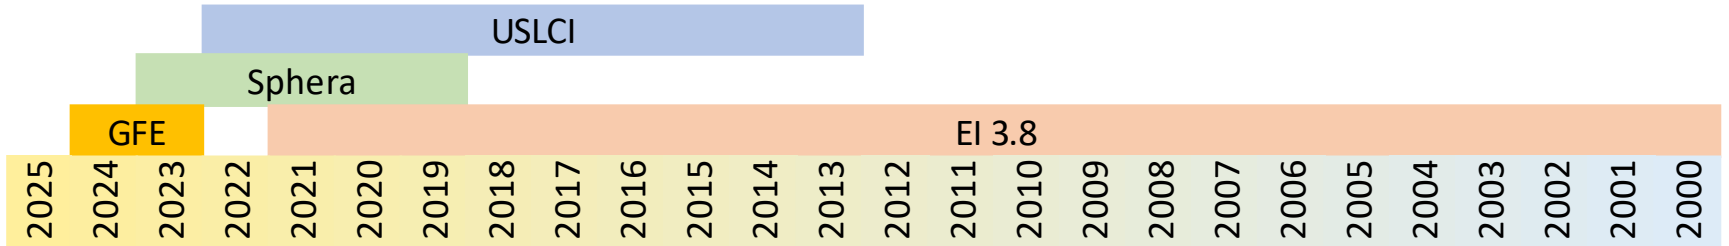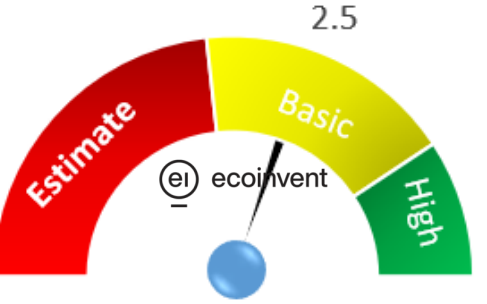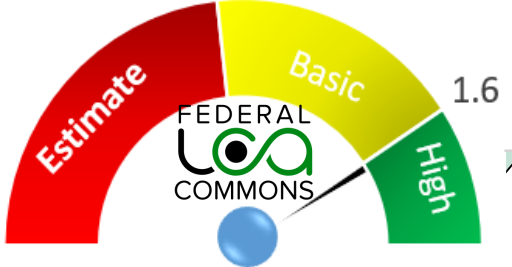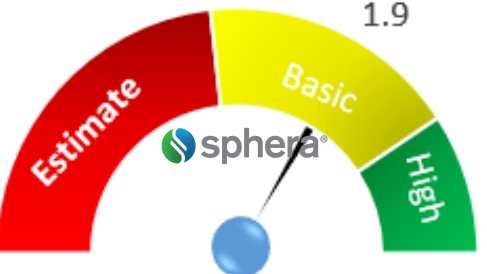


Original Document	Databases/Platforms	Data quality index						
		Pedigree					US EPA	
Life cycle assessment of CFGF – Continuous Filament Glass Fibre Products by pwc	EuCia	1	2	2	1	1	2	1
DE: Glass fibres	Sphera	2	2	2	1	2	2	1
E-glass, US	USLCI	1	2	2	1	1	2	1
Life cycle inventories of building prodcuts – Ecoinvent Data v2.0 by Hishier R. 2007, Glass fiber production	Ecoinvent/MS360	1.4	1.6	5	1.4	1.3	2	5
Life cycle inventories of building prodcuts – Ecoinvent Data v2.0 by Hishier R. 2007, GRP Polyester resin hand lay up	Ecoinvent	4	4	5	3	1	2	5
Life cycle inventories of building prodcuts – Ecoinvent Data v2.0 by Hishier R. 2007, GRP Polyester resin injection moulding	Ecoinvent	4	4	5	3	1	2	5



Carbon fiber (per kg)

A range of
1150 MJ




equivalent to the average energy consumed by an electric car in about one month and half ~ 1157 km



A range of
70 kg CO2 eq

equivalent to the carbon footprint of a short domestic flight of 367 km

~ **Glasgow - Belfast**

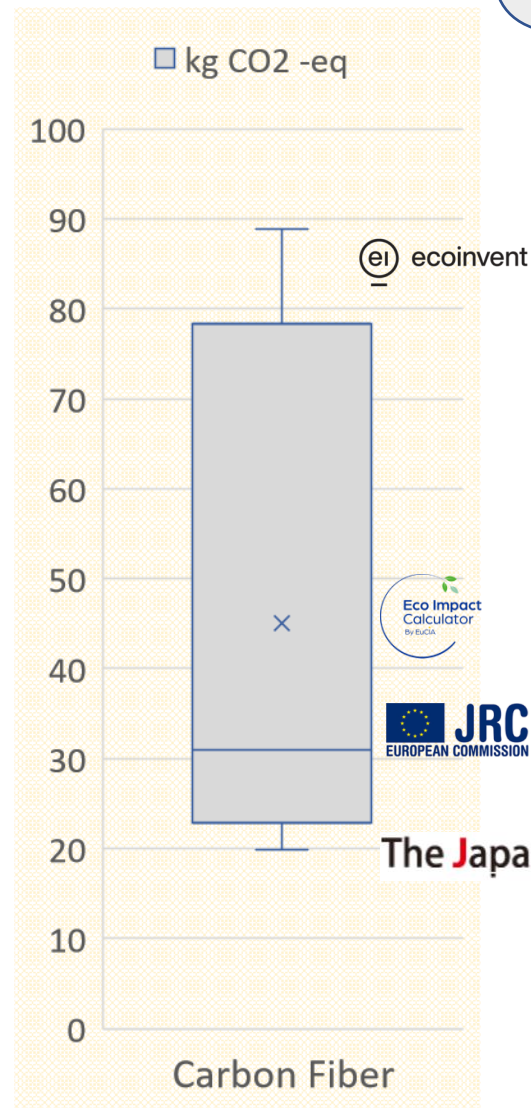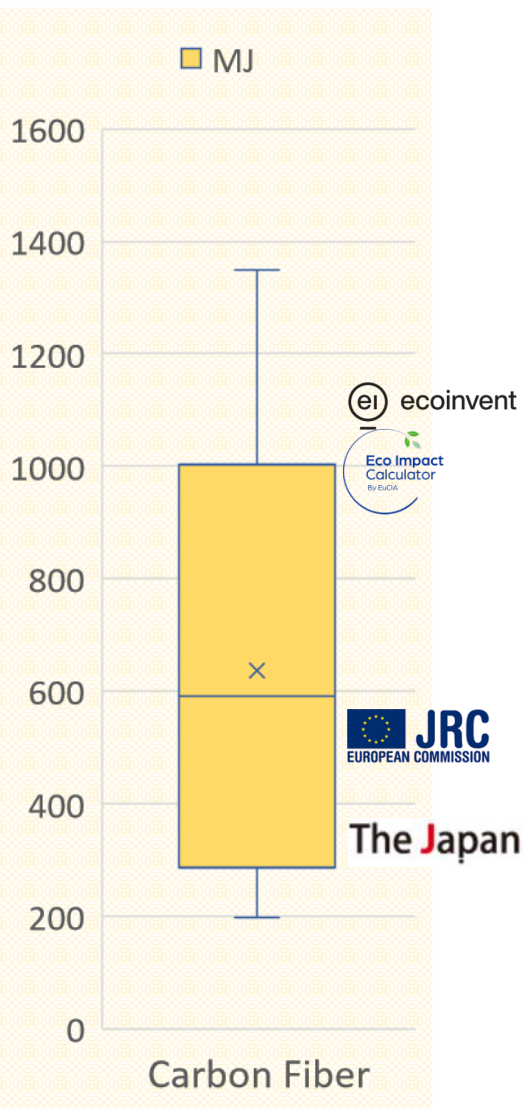

The **J**apan **C**arbon **F**iber **M**anufacturers **A**ssociation

The **J**apan **C**arbon **F**iber **M**anufacturers **A**ssociation

Carbon fiber input process data set





Ecoinvent 3.9 GLO
Acrylonitrile butadiene styrene co polymer GLO
chemical factory, organics
Injection moulding
Electricity, low voltage
heat, district or industrial, natural gas

JCMA
Acrylonitrile (AN)
Comonomer
Polymerization catalyst
Solvent
PAN fiber oil (PG)
Carbon fiber sizing agent
Electrolyte (sulfuric acid)
Packaging film (PE)
tap water
Paper tube
Outer packaging material
Electricity Consumption
Steam Consumption
Fuel consumption
Utility gas (nitrogen)
Water consumption


Eu Cia
Polyacrylonitrile fibres (PAN) from acrylonitrile and methacrylate, prod. mix
Water, decarbonised
Epoxy resin, liquid
Sulfuric acid
Ammonium bicarbonate
Polydimethylsiloxane
Unwinding primary electricity
Oxidation primary electricity
Carbonization LT primary electricity
Carbonization HT primary electricity
Exhaust gas treatment primary electricity
Elektrolysis primary electricity
Elektrolysis primary gas
Washing primary electricity
Washing primary gas
Drying-II primary electricity
Drying-II primary gas
Spooling primary electricity
Spooling primary gas

Sphera RER
Polyacrylonitrile Fibres (PAN)
Epoxy Resin (EP)
Hexamethylenediamine (HMDA; from acrylonitrile via adiponitrile)
Nitrogen (gaseous)
Ammonium hydrogen carbonate (Ammonium bicarbonate)
Deionised water- open input electricity
Deionised water- open input electricity
Electricity grid mix

DQA: Carbon Fiber

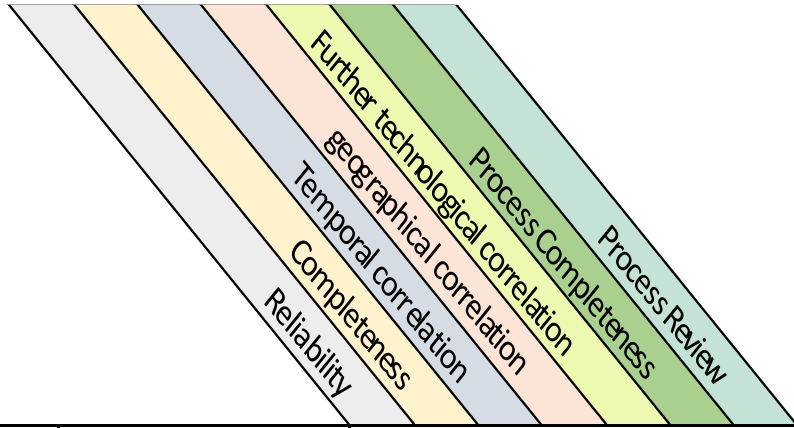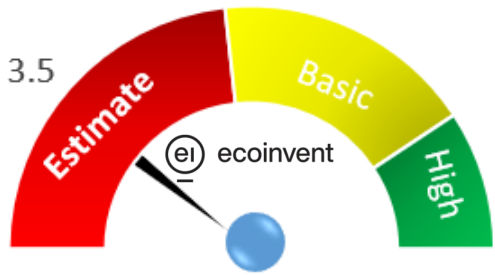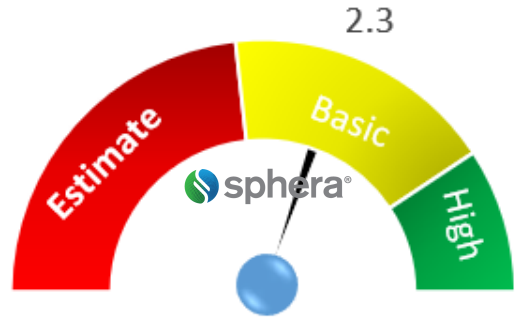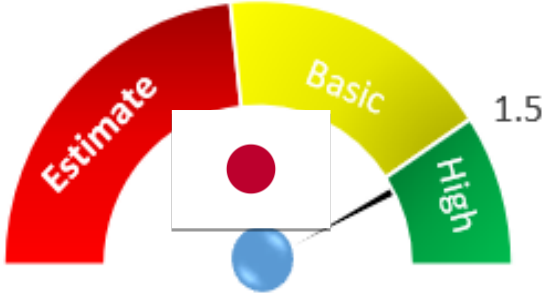

Original document	Databases/Platforms	Data quality index						
		Pedigree					US EPA	
Carbon fibre reinforced plastic, injection moulded - GLO Ecoinvent	Ecoinvent/MS360	4	5	4	5	4	5	2
Overview of LCI data for Carbon Fiber by JCMA	NA	1	2	1	1	1	2	1
Carbon fiber RER sphera	Sphera	3	3	2	1	3	1	2
Carbon Fiber by EuCia	EuCia	3	4	4	3	2	5	4



Case study / Scenario analysis

Fiberglass composite hull


Materials	Total Weight (%)	MJ (%)	kg CO2-eq (%)
E-glass	53	29	31
UP Resin	29	51	52



Hull of outboard powerboats


IPCC 2021 GWP (kg CO2-eq)

kg CO2-eq

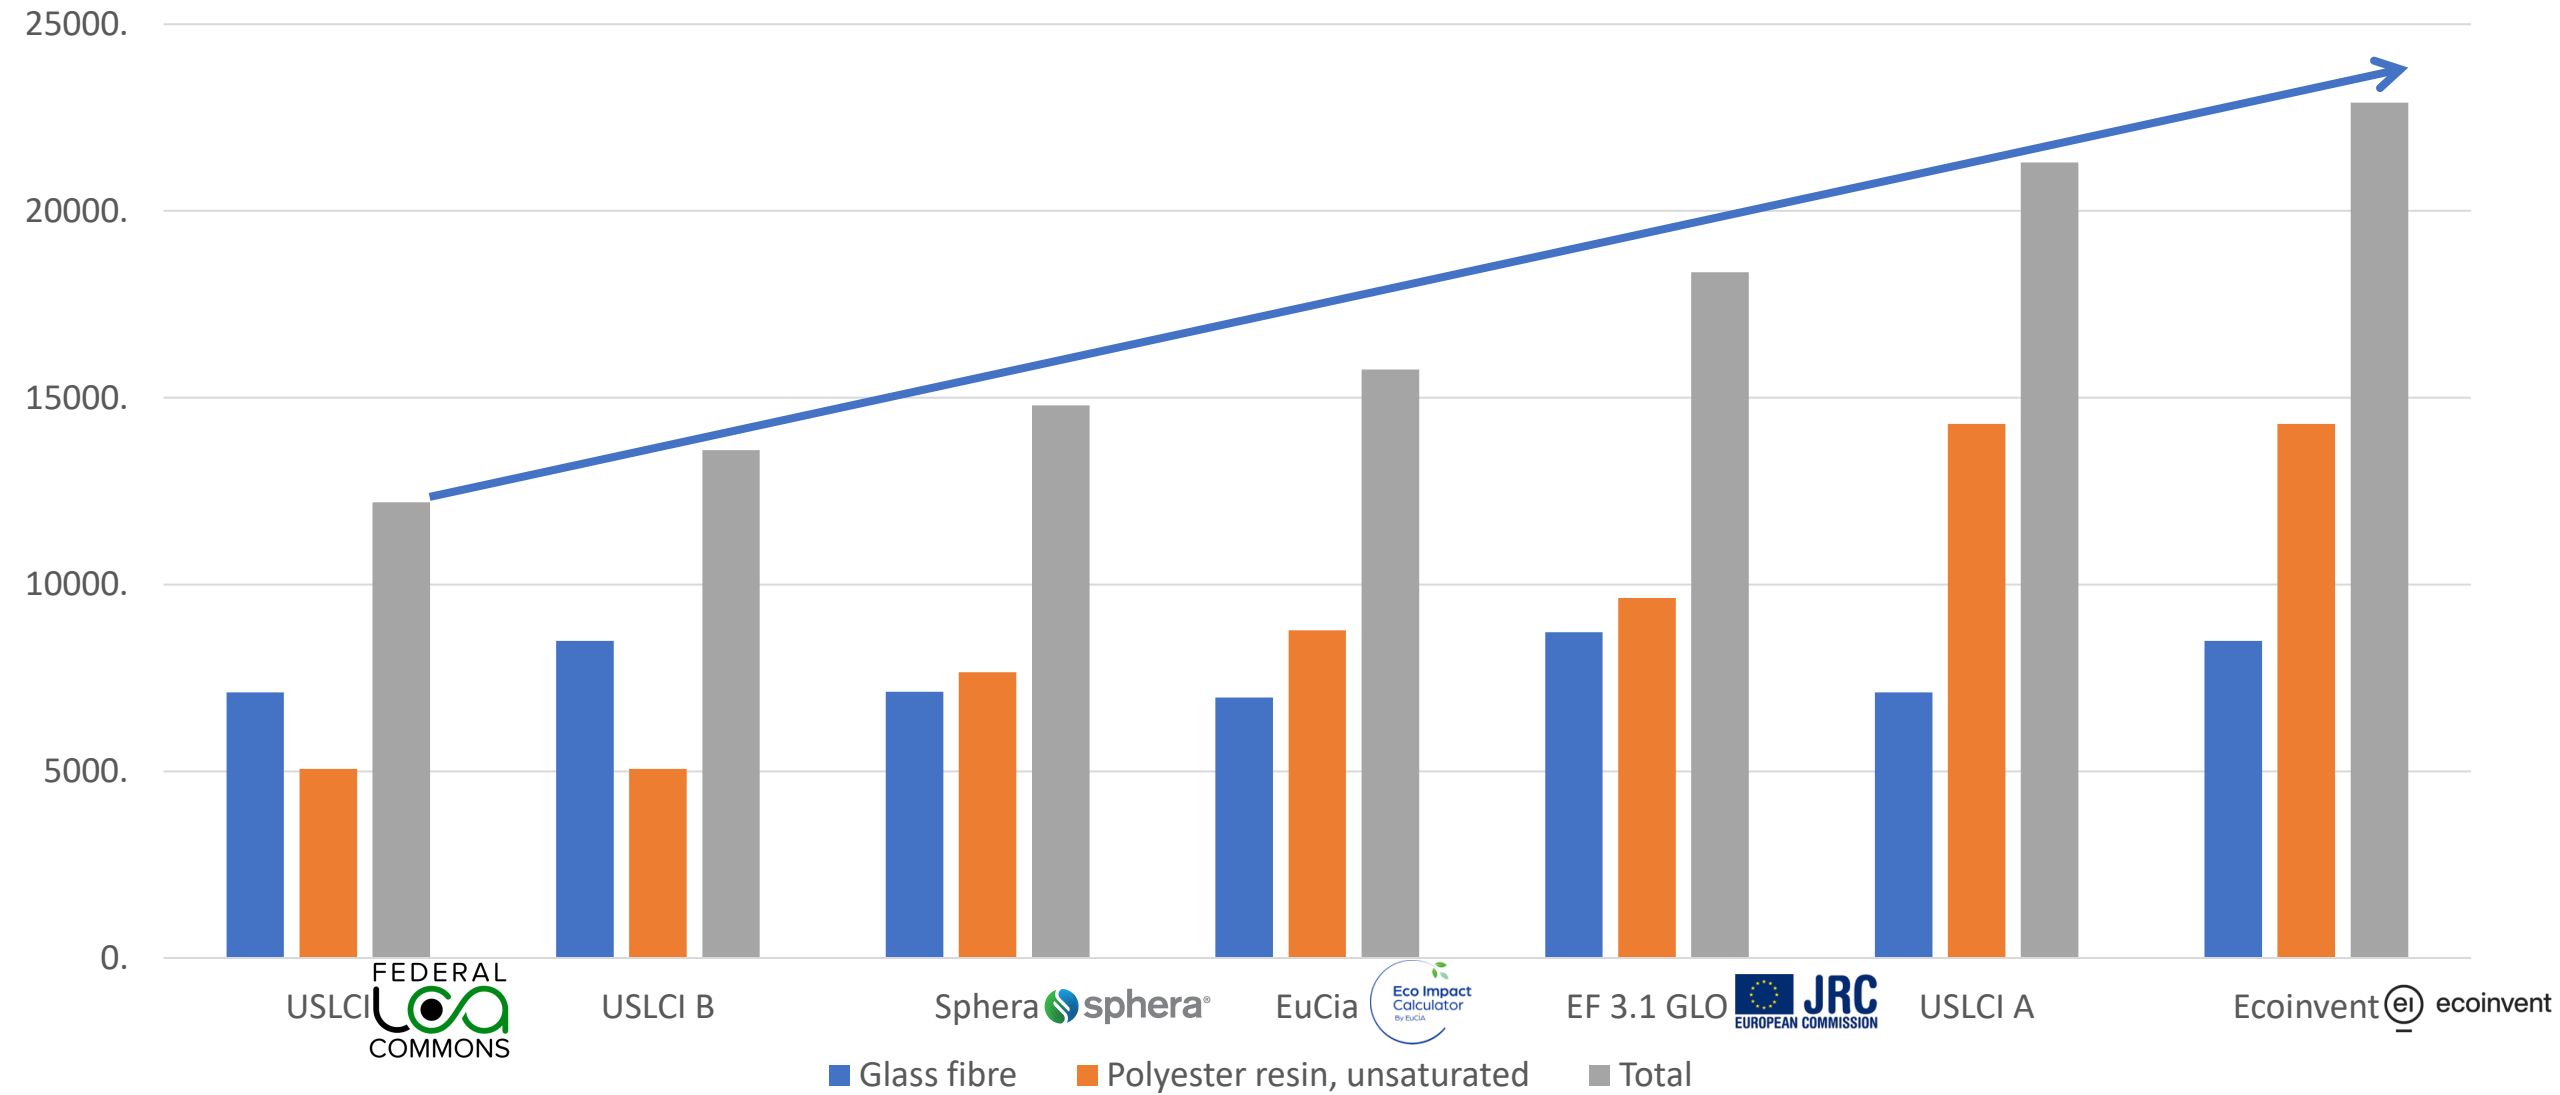


Cumulative energy demand (MJ)

MJ

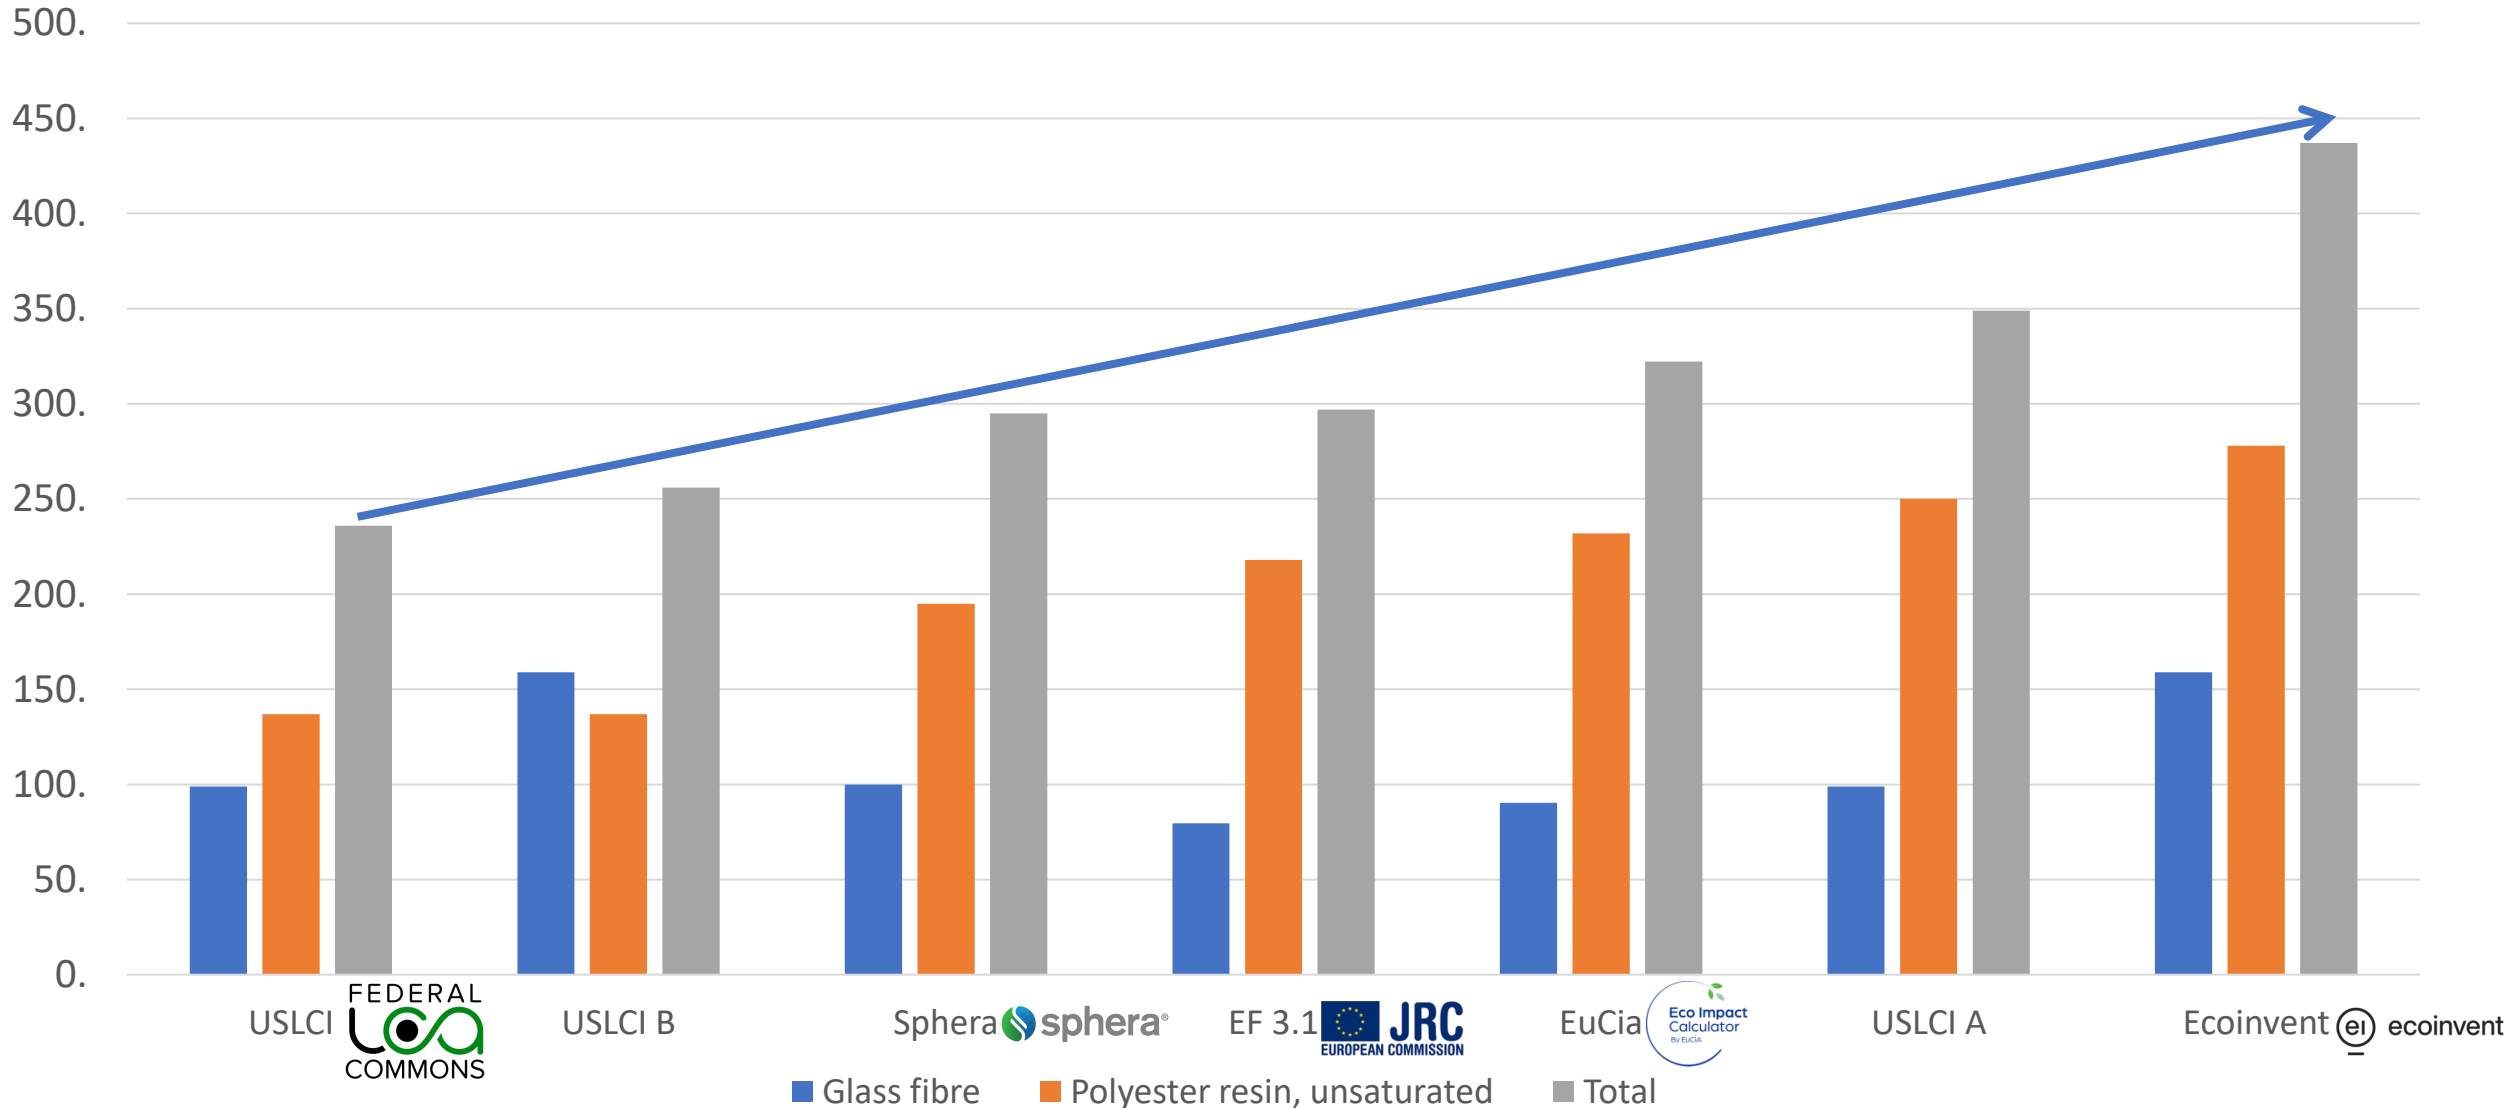

Uncertainty analysis /Monte Carlo simulation for UP resin IPCC 2021 GWP

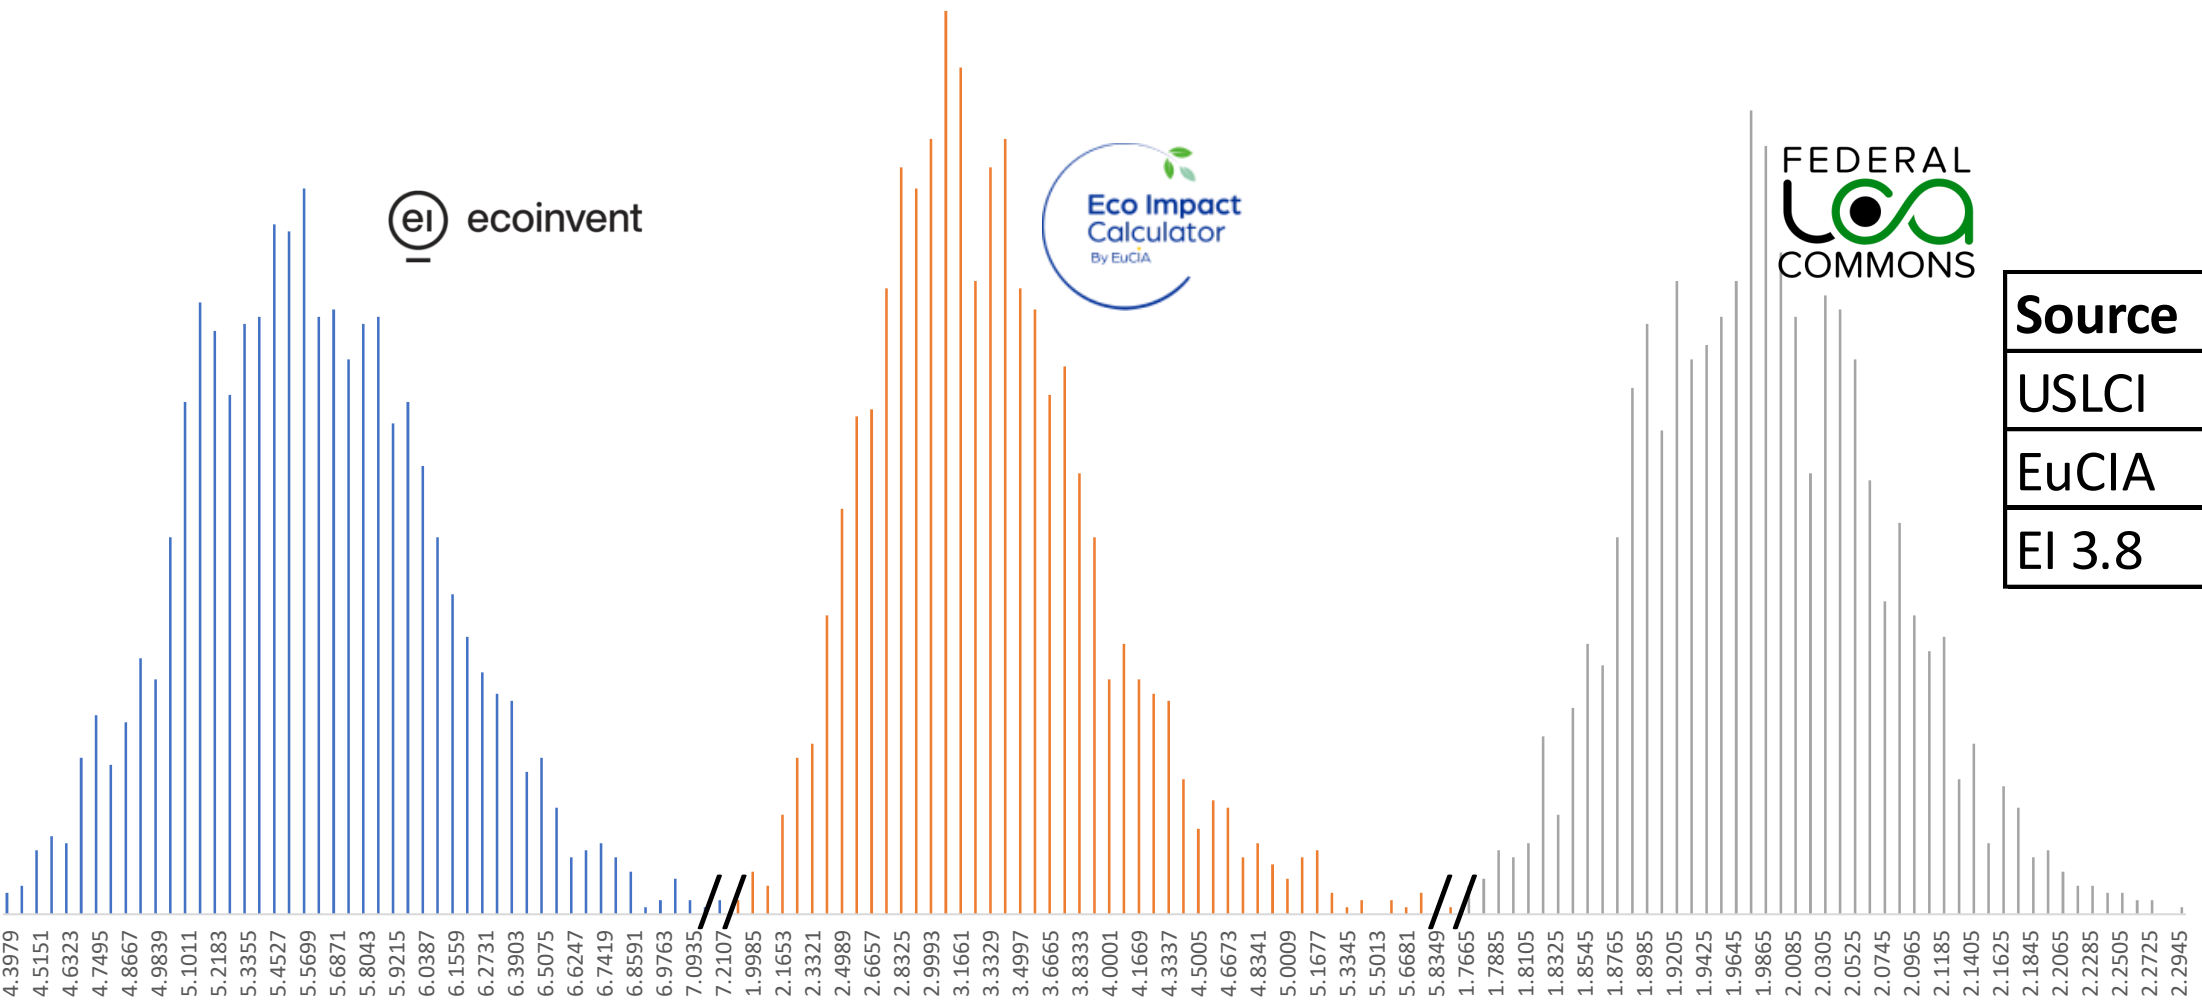


Source	CV
USLCI	4.31
EuCIA	15
EI 3.8	9.11

Uncertainty analysis /Monte Carlo simulation for UP resin Cumulative energy demand (MJ)



Source	CV
USLCI	5.33
EuCIA	20
EI 3.8	8.5

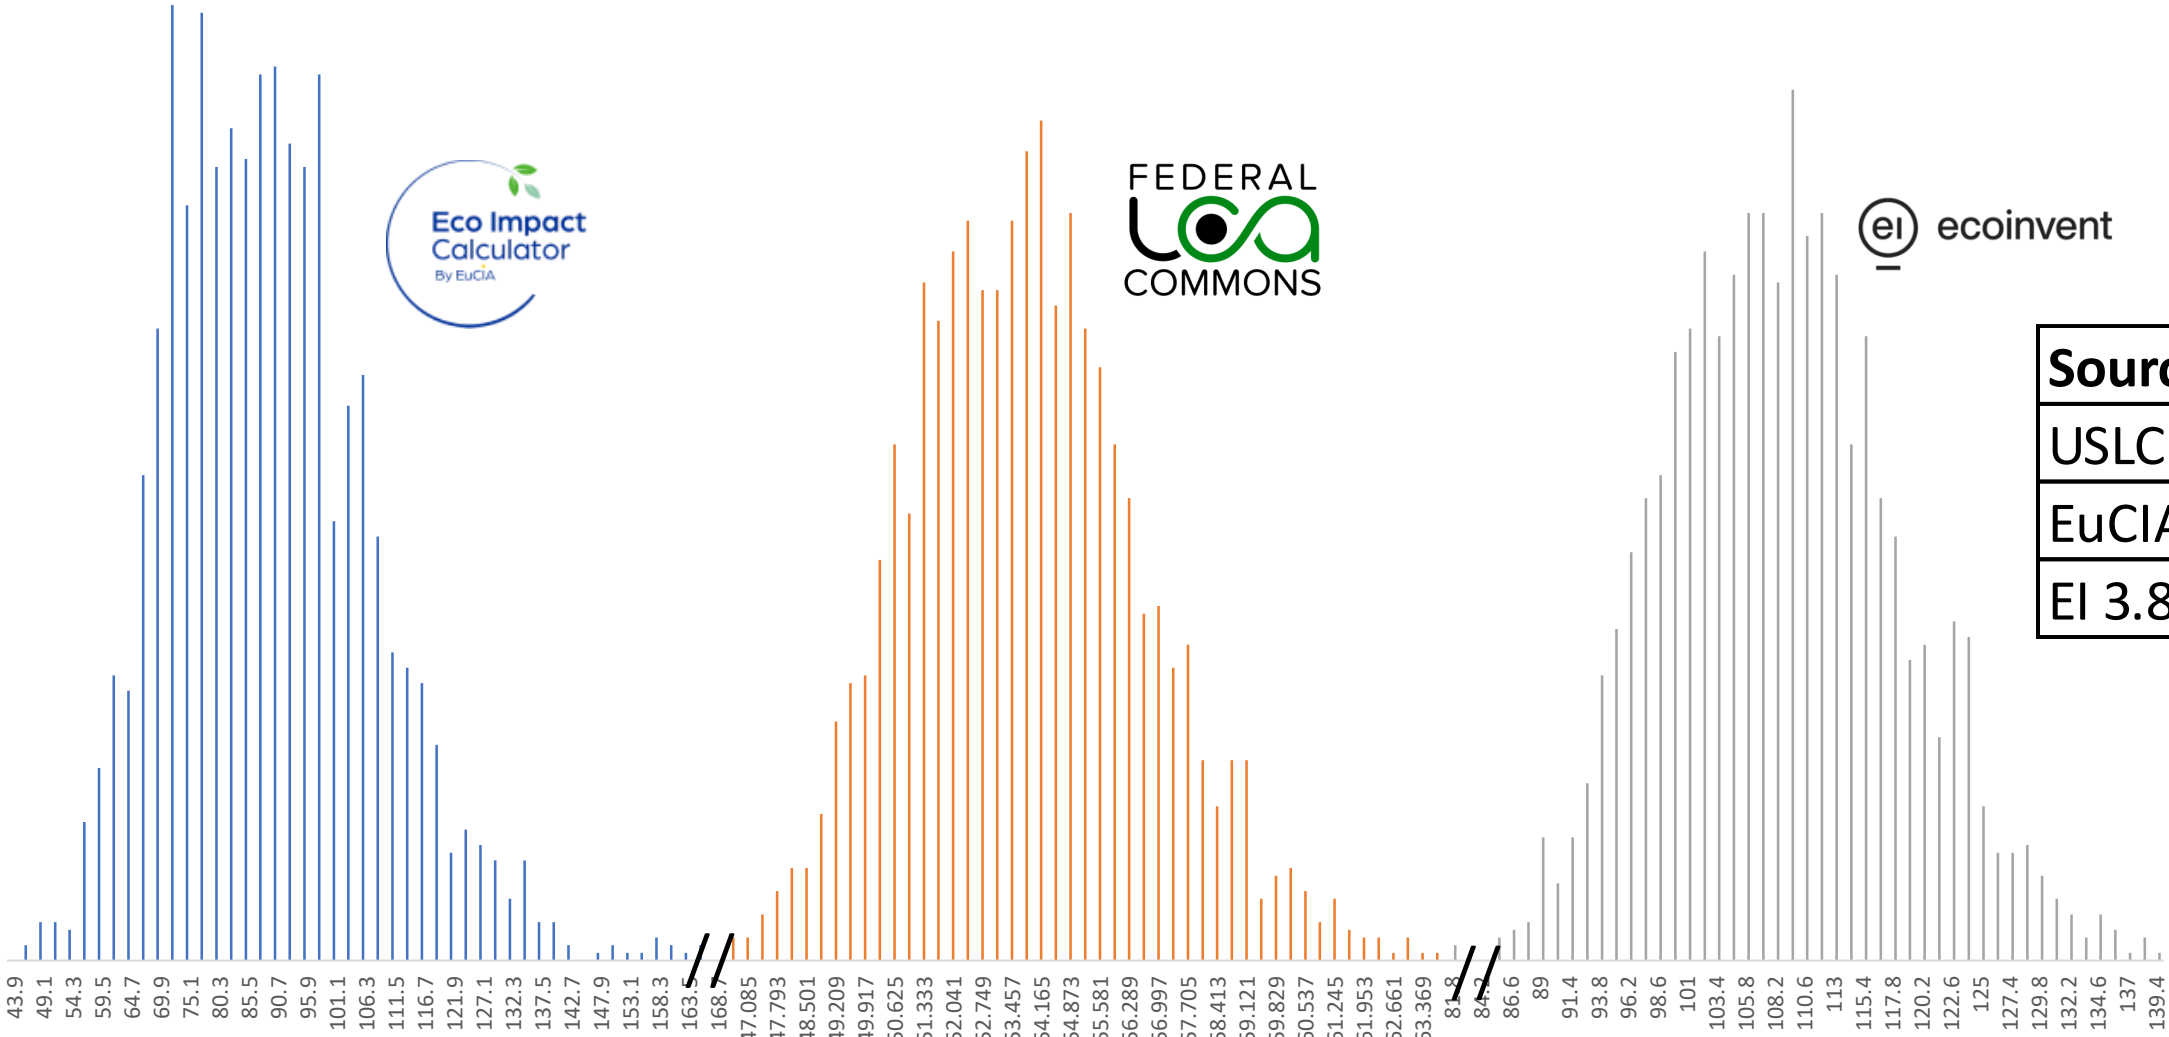





Common LCI data quality











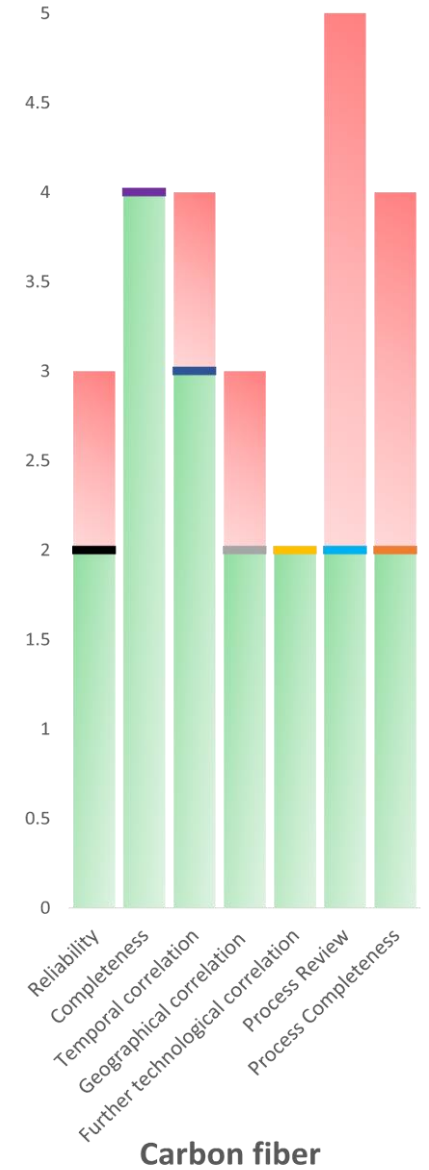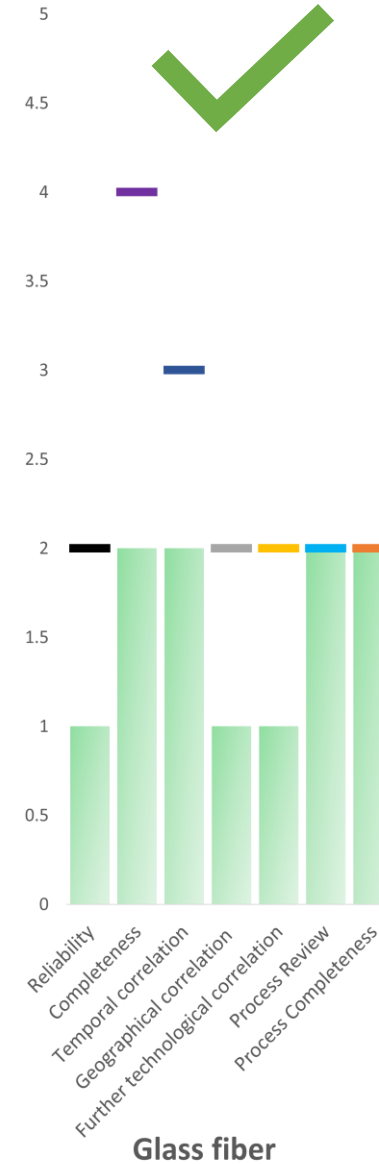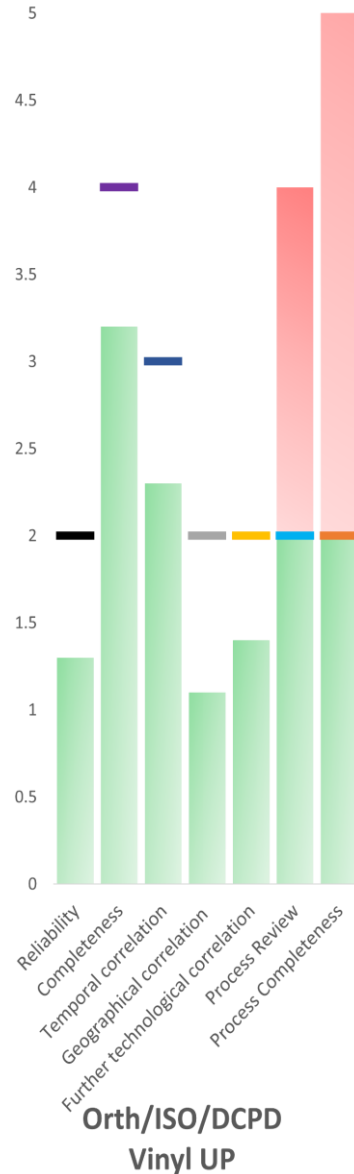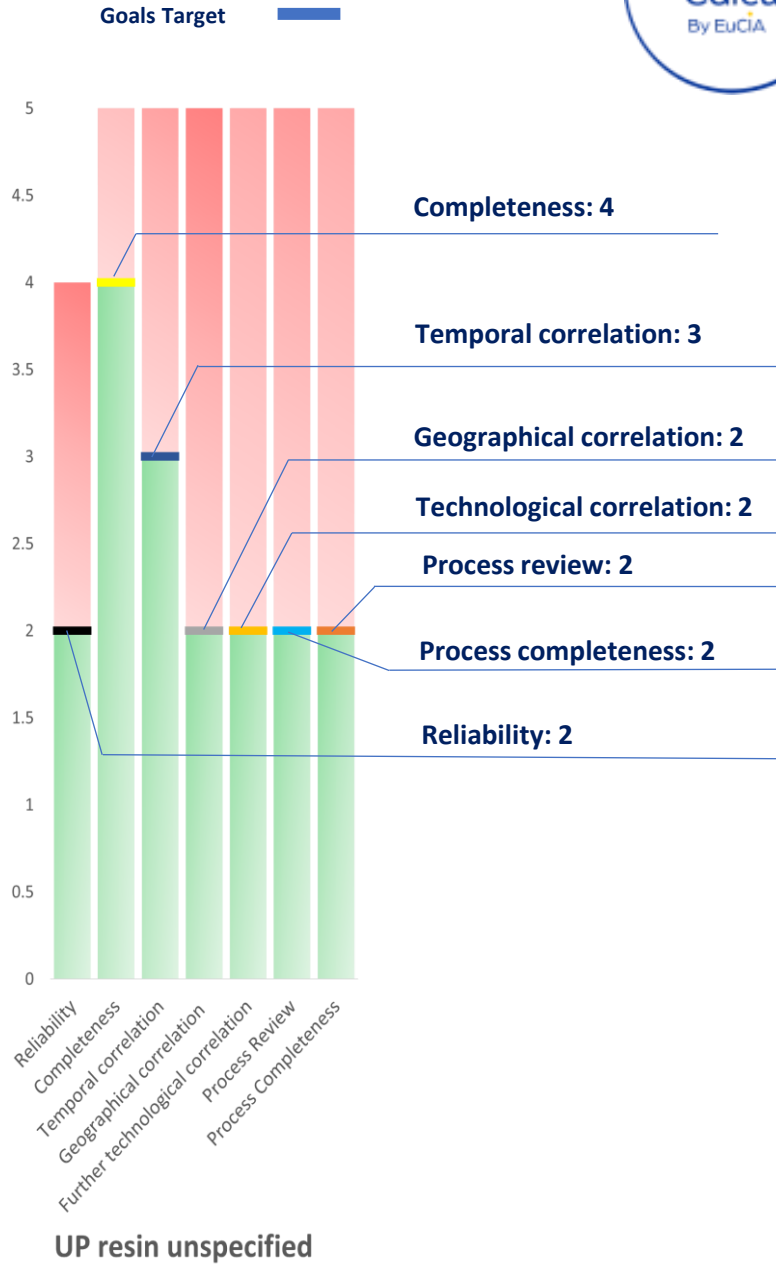













for Composites?

Time-related coverage	Geographical coverage	Technology coverage	Precision
Consistency	Uncertainty	Representativeness	Reproducibility
	Sources of the data	Completeness	Seen this before, Data quality requirements no change


Acceptability



	UP resin unspecified	Ortho/ISO/DCPD/Vinyl ester	Epoxy resin	Glass fiber	Carbon fiber
 					
					
					
					
The J apan C arbon Fiber M anufacturers A ssociation					

Conclusion and future work

- Defining a best-case LCI dataset or dataset range for composite materials (i.e., FU, SB...)
- Establishing acceptability criteria or "DQA goals" specific to composites LCI datasets in sector platforms would provide a standardized framework for evaluating data quality.
- The development of sector-specific guidelines for background data analysis would be valuable.
- Harmonizing the data quality assessment (DQA) methodology with the ILCD handbook, and to use in sector platforms datasets, would promote consistency and comparability in LCI data evaluations.

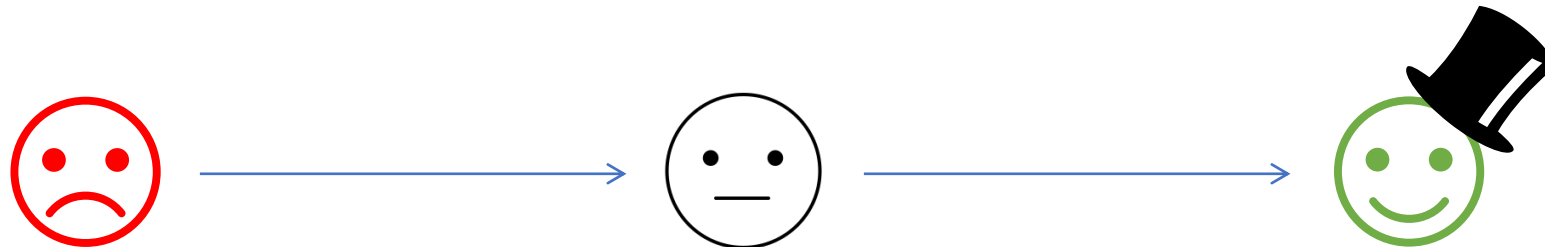




Webinar

Southern Counties Materials Minerals
and Mining Society (SCMMMS) webinar

25 January 2024 (TBC)

Save the date, Join us

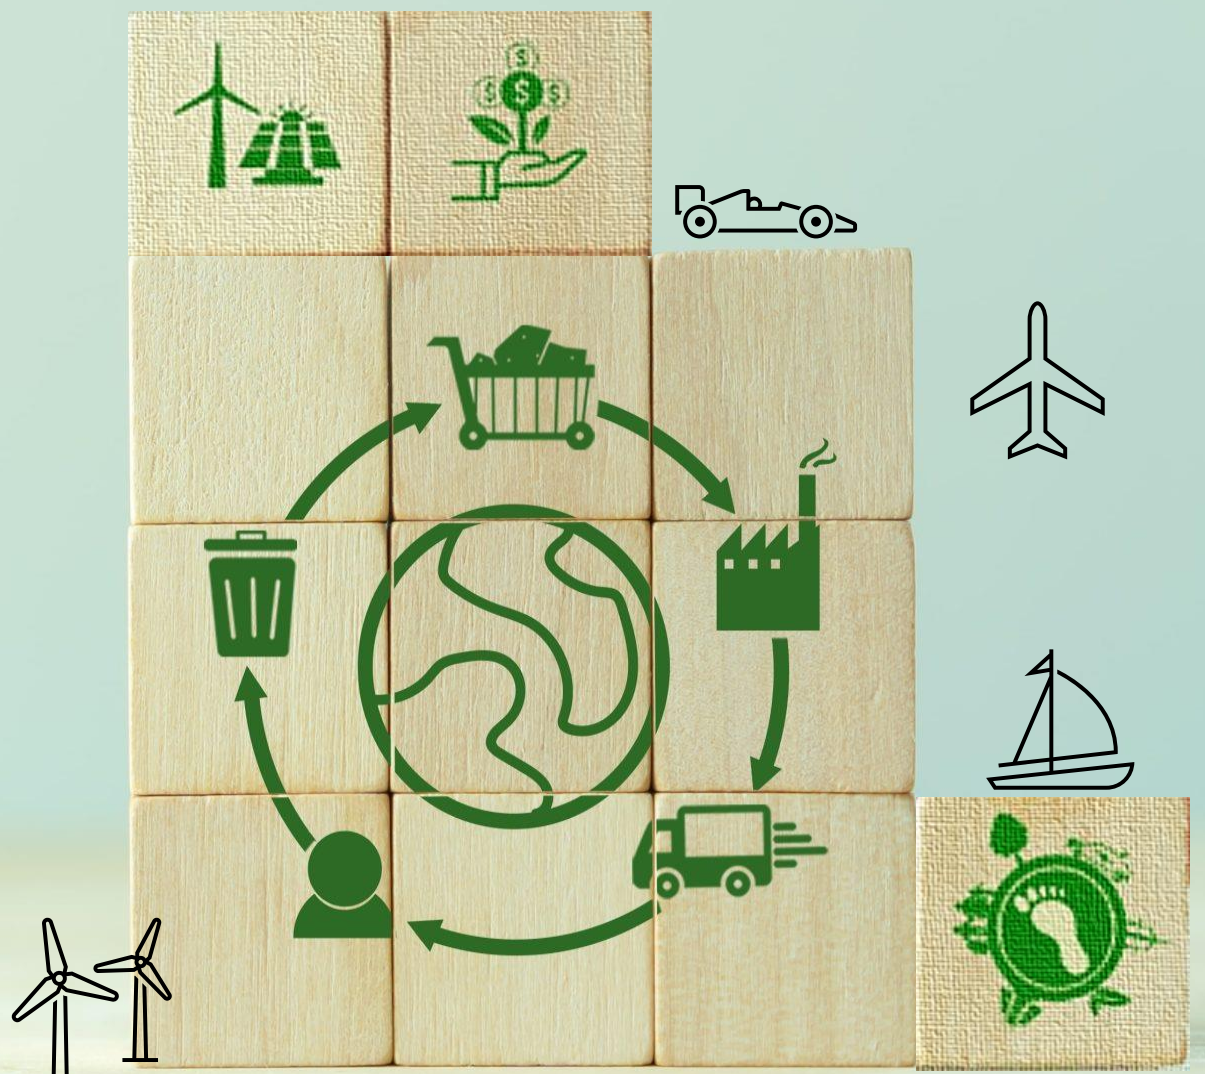

Thank you

